

4

3

2

1

REVISION DATA

REV





DESCRIPTION

DATE

A0

NEW DRAWING

2015-07-22

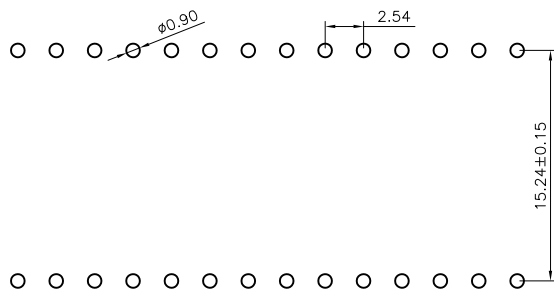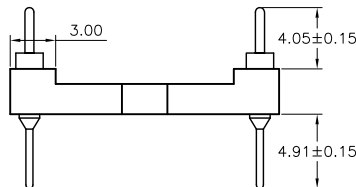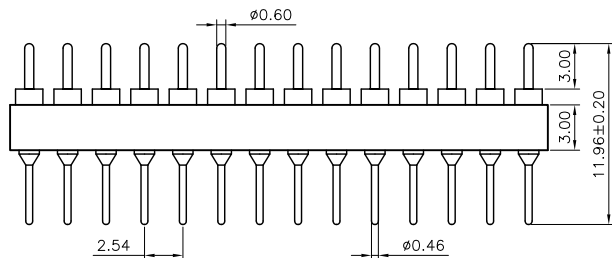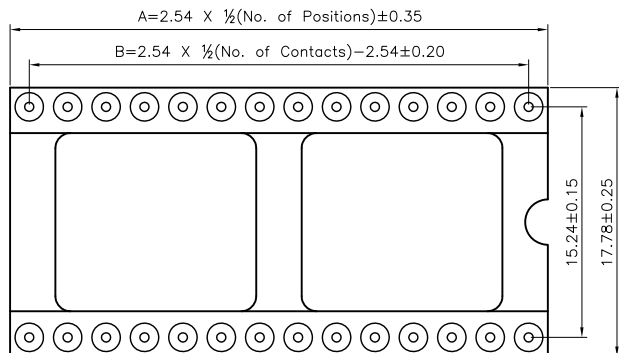

P.C.B LAYOUT

No.of positios	DIM"A"	DIM"B"	TYPE
20	25.40	22.86	无 槽
24	30.48	27.94	
28	35.56	33.02	
32	40.64	38.10	
40	50.80	48.26	
20	25.40	22.86	带 槽
24	30.48	27.94	
28	35.56	33.02	
32	40.64	38.10	
40	50.80	48.26	
42	53.34	50.80	
48	60.96	58.42	
64	81.28	78.74	

Material:

Pin: Brass,machined CuZn38Pb2

Plating:

Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn

Gold Plated:2μm/80μ"nickelfull gold

Insulator black(housing): PBT (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: ≤4mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Operaing voltage: 60VAC/DC

Mechanical:

Operaing temperatures: Gold Plated:-55°C to+105°C

Tin plated:-40°C to+105°C

Soldering temperature: +220°C,10s max

PA

D

XXX

6

7

X

X

XX

1196A

R

00

ENKCOM®
www.enkcom.com
TEL:+86(0)769 8904 9672
FAX:+86(0)769 8904 9671
E-MAIL:sales@anycom.tw

东莞市恩康电子科技有限公司

DONGGUAN ENKANG ELECTRONICS TECHNOLOGY CO.,LTD

Angel Options
D 180°直插
R 90°折弯
S SMT
H 卧式贴片
A 单排SMT
第1Pin朝下
B 单排SMT
第1Pin朝上

No. of Positions
XXX Positions

Dip Spacing
0 No
1 1.27mm
2 2.54mm
3 7.62mm
4 10.16mm
6 15.24mm
9 22.86mm
S Special

Insulator Height
0 No
1 1.20 mm
2 1.90 mm
3 2.00 mm
4 2.10 mm
5 2.20 mm
6 2.80 mm
7 3.00 mm
8 3.80 mm
9 4.10 mm
A 4.20 mm
B 7.00 mm
S Special

Insulator type
A PBT单排
B PBT双排
C PBT中空
D PBT带孔
E PPS单排
F PPS双排
G PPS中空
H PPS带孔
I PA46单排
J PA46双排
K PA46三排
L PA66单排
M LCP四排

Pin Plated
0 No
1 Tin120μ" 锡
2 Tin200μ" 锡
3 Gold0.4μ" 金
4 Gold0.8μ" 金
5 Gold1.5μ" 金
6 Gold2μ" 金
7 Gold3μ" 金
8 Gold5μ" 金
9 Gold10μ" 金
A Gold15μ" 金
B Gold30μ" 金
C Gold150μ" 金
D Ag plated
F Nickel80μ" 镍

Clip plated
0 No
1 Tin120μ" 锡
2 Tin200μ" 锡
3 Gold0.4μ" 金
4 Gold0.8μ" 金
5 Gold1.5μ" 金
6 Gold2μ" 金
7 Gold3μ" 金
8 Gold5μ" 金
9 Gold10μ" 金
A Gold15μ" 金
B Gold30μ" 金
C Gold150μ" 金
D Ag plated
F Nickel80μ" 镍


Pin length(mm)
1196A 11.96mm
S Special

Insulator Option
0 No
D 直角塑胶
R 圆角塑胶
S 小孔塑胶

Series
00 NO

TOLERANCE
ANGLE ±5°
X.XXX ±0.10
X.XX ±0.20
X.X ±0.30
X. ±0.50

PROJECTON
DATE :
DRAWN :
CHECKED :
APPROVED :



2015-07-22

Songjun

TITLE:

2.54mmPitch IC Sockets Straight
DIP Spacing 15.24mm Pin Length 11.96mm

PART NO: PADXXX67XXXX1196AR00

DRAWING NO:

REV: A0

UNIT: mm

SCALE: 3:1

SIZE: A4