
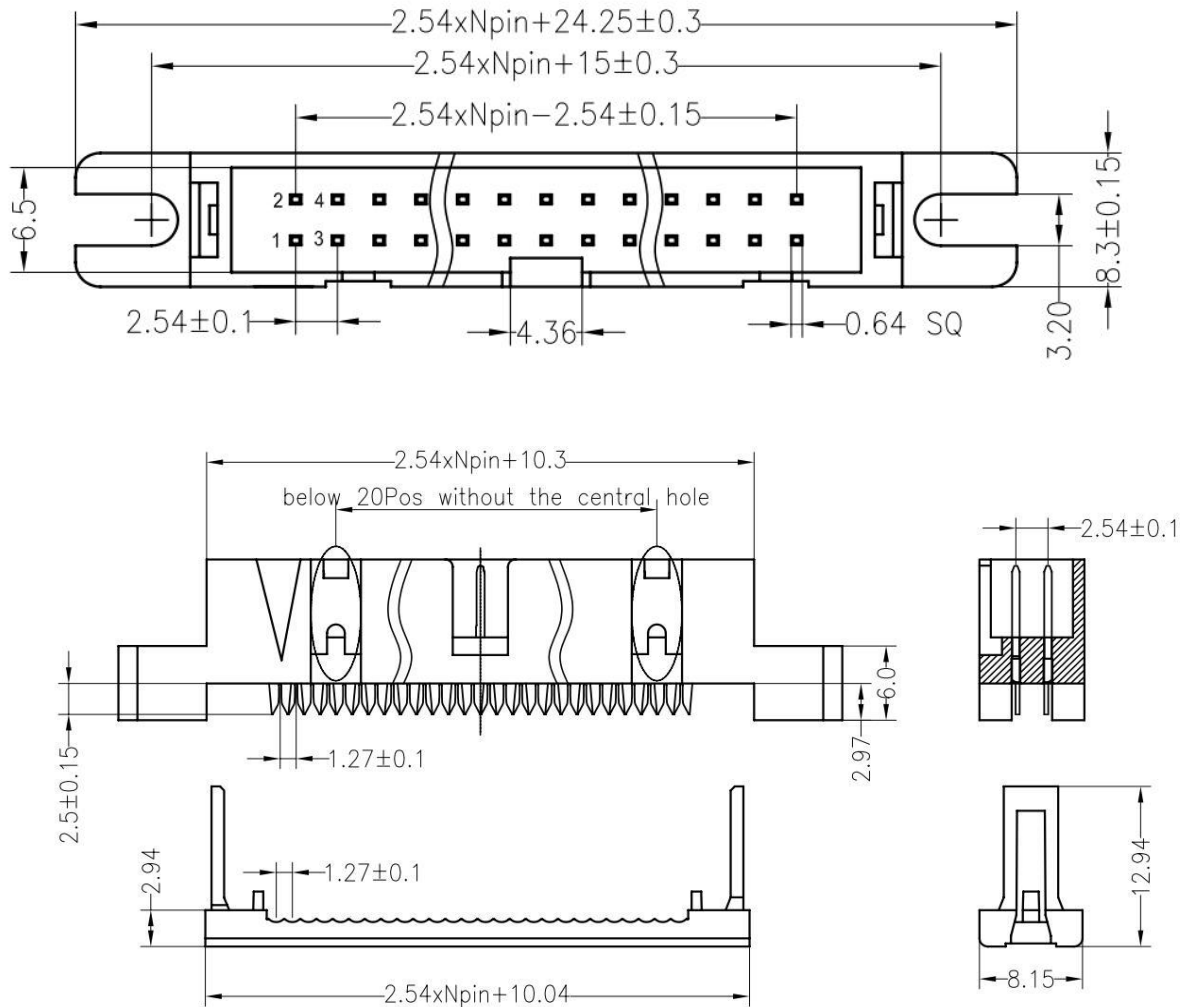


SPECIFICATIONS:

Rated Current	3.0AMP
Contact Resistance	20mΩ Max
Withstand Voltage	1000V AC/DC
Insulation Resistance	1000mΩ Min
Operation Temperature	- 40°C to +105°C
Contact Material	Brass
Contact Plating	Au or SN over Ni
Insulator Material	PBT
Max. Processing Temp:	180°C for 30-60 seconds 200°C for 10 seconds

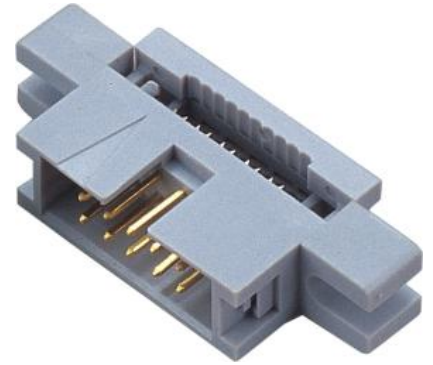

Ordering Information

HC Series	No.of Pin Per Row	Plating Code	Inner Code	Insulator Option	Insulator Color	Packing	End code
HC-BHI410	08P	G0=Gold Flash	W	A=PBT	B=Black	0=PE Bag	X
2.54mm Box Header IDC	64P	SN=Tin Plated			G=Grey	A=Tray	01
		SM=Matted Tin				T=Tube	02
		S0=Gold/Tin				X=Special	
		G1=3u Gold					
		G2=5u Gold					
		G3=10u Gold					
		G4=15u Gold					
		G5=30u Gold					
		S1=3u Gold/Tin					