





深圳市星光彩科技有限公司
Shenzhen Xing Guang Cai Technology Co., Limited

Add: No.2505 Songbai Road, Shiyao Town, Baoan District, Shenzhen, China
 Contact Person: **Ms Helen Qin** Skype: **helenqin32** Mob/WhatsApp/Wechat: **+86 17688933149**
 Email: **sales02@szxgled.com** Web: **www.xgled.com**

P6 Outdoor LED Display Parameter

LED Module		
	pixel pitch	6mm
	module size	192*192mm
	module resolution	32*32dots
	LED	SMD3535
	Scan	1/8scan
	Application	outdoor
	Weight	0.4KG
	Chip	Epistar

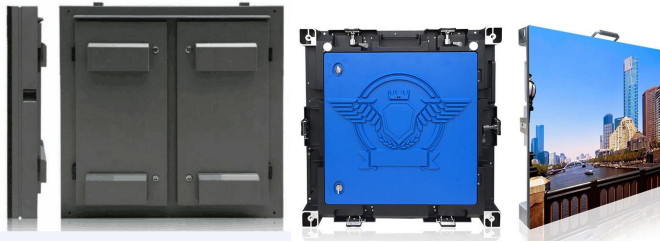
LED Cabinet		
	Cabinet Size	960*960mm, or customized
	Cabinet resolution	160*160dots
	module quantity	5*5pcs
	LED driver	5V 40A 200W /5V 60A 300W
	Material	Iron/Die casting aluminum
	Receiving card	1pcs
	Power Input	AC110~240V

LED Screen				
	Pixel density	27777dots/m ²	Continuous Working Hours	>72 hours
	Ave power consumption	300W/m ²	Using Life	100,000 hours
	Max power consumption	1000W/m ²	MTBF	>10,000H
	Optimum Viewing Distance(m)	≥6m	Scatter OOC Point	<0.01%
	Brightness(cd/m ²)	≥5500cd	Continuous OOC Point	None
	Refresh Rate	300---2440 frame/s	IP Grade	IP65/IP54
	LED Drive mode	Constant Current	Working Temperature	-35C----+60C
	Display color	17M——69G	Working Humidity	10---90%
	Control system			
Control system		Novastar, Colorlight etc.		
Operating System		Windows98/me/2000 /NT/XP/Android/IOS		
Control mode		computer/USB/WIFI/4G		
Maintenance Access		Back service /Front service		



深圳市星光彩科技有限公司
Shenzhen Xing Guang Cai Technology Co., Limited

Connection diagram with control systems

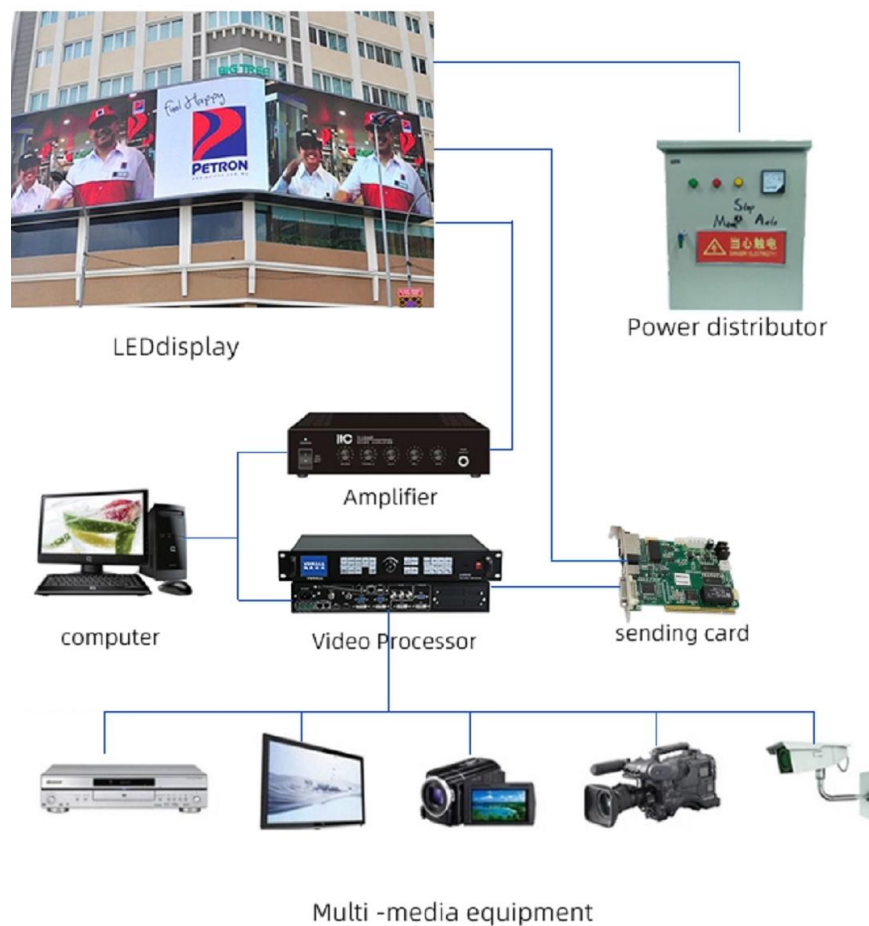

Installation viewing:

It can meet the different demands of movable occasions with hanging bar or back brackets.





深圳市星光彩科技有限公司
Shenzhen Xing Guang Cai Technology Co.,Limited



Up and down connection



Connection piece fixing

Package:

According to the different packing patterns of different,
carton packing, flight case packing.

