





DIMENSIONS DRAWING

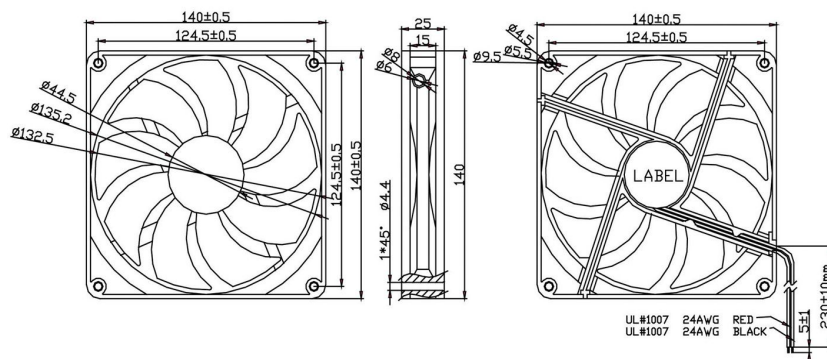

* Lead wire type: #26AWG

P&Q CURVE (AT RATED VOLTAGE)

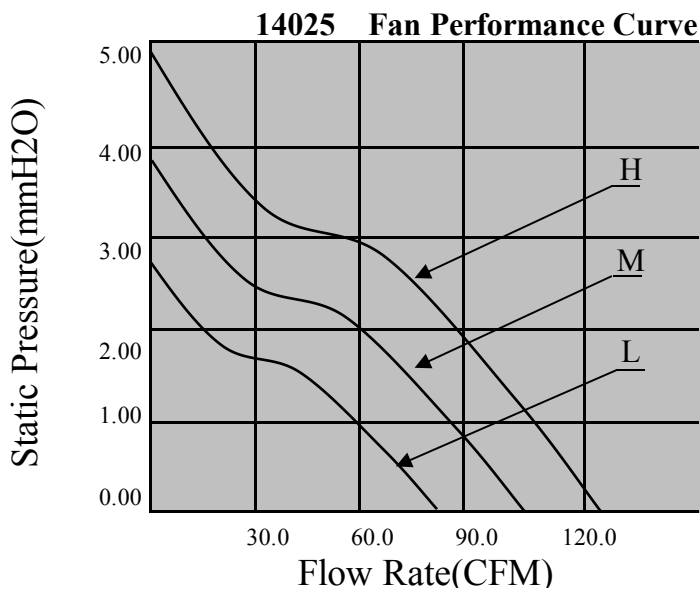

Model	Bearing	Code	Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Air Flow	Static Pressure	Noise	Weight
PART NO.			VDC	VDC	Amp	Watt	RPM	CFM	mmH2O	dBA	g
ED14025S(B)12H	B.S	H	12	6-13.8	0.24	2.88	1800	122	4.95	31	178
ED14025S(B)12M	B.S	M		6-13.8	0.2	2.4	1400	104.2	3.9	29	
ED14025S(B)12L	B.S	L		6-13.8	0.16	1.92	1000	88.3	2.85	26	
ED14025S(B)24H	B.S	H	24	12-27.8	0.12	2.88	1800	122	4.95	31	
ED14025S(B)24M	B.S	M		12-27.8	0.1	2.4	1400	104.2	3.9	29	
ED14025S(B)24L	B.S	L		12-27.8	0.08	1.92	1000	88.3	2.85	26	

*Specifications are subject to change without notice.