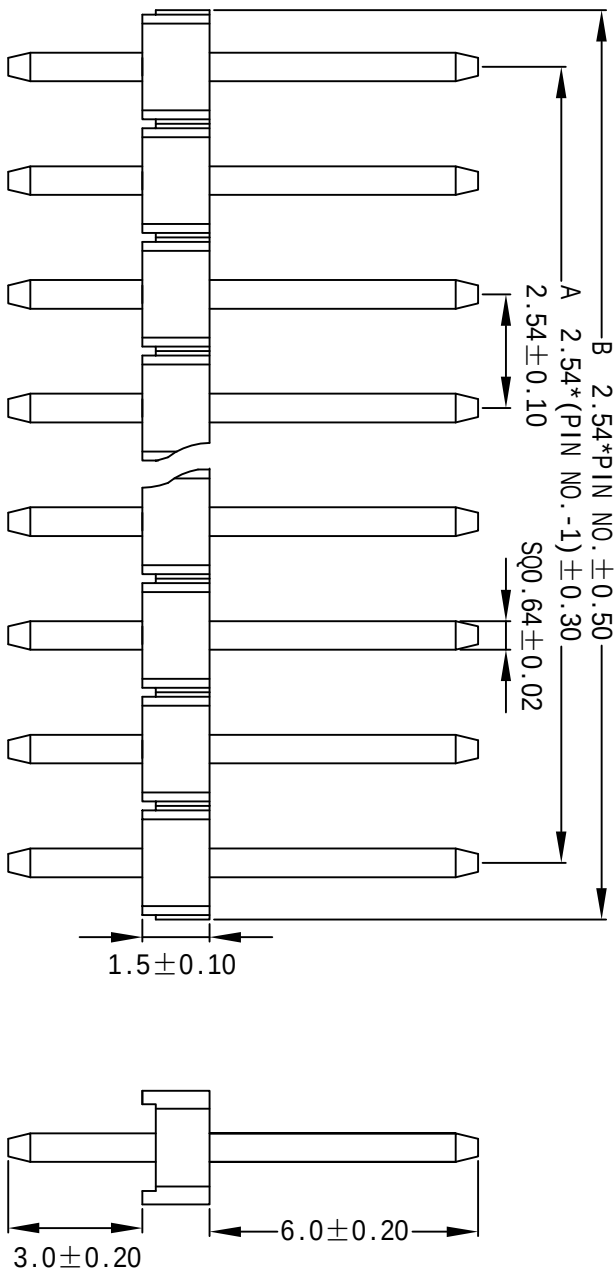
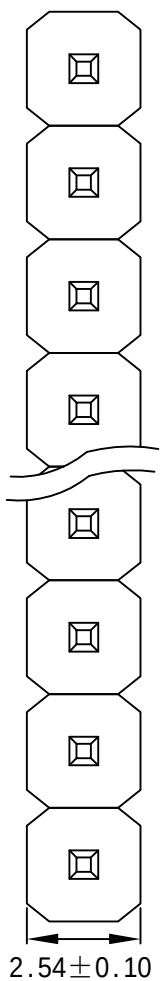


P.C.B LAYOUT

SPECIFICATION	
Current Rating	: 3A
Insulator Resistance	: 1000 MΩ min.
Contact Resistance	: 20 mΩ Max.
Dielectric Withstanding	: AC 500V
Voltage rating	: 250V AC
Operating Temperature	: -40°C to +105°C
Contact Material	: Brass
Insulator Material	: Polyester, UL 94V-0
Standard	: NL9T+30%G.F
Standard	: Gold Flash

PIN NO.	DIMENSION	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.7
6	12.7	15.24
7	15.24	17.78
8	17.78	20.32
...	...	...
40	99.06	101.6

C				DRAWN	Yang	General Tolerance:	
B				CHECKED	Brin	.X° = ±0.30°	.X° = ±5°
A				APPROVAL	B.T	.XX = ±0.20	.XX = ±3°
REV	DATE	Content	BY	DATE	2019-11-12	PROJECTION:	mm
				TITLE: PH2.54*1.5 1*XP SQ10.5/3.0 S/T NL9T 环保			