


Car Camera CAR-F4F-104

Features:

- Metal IR Car Camera;
- Default as AHD Mode;
- Built-in Megapixel 2.8mm Fixed Lens;
- Support OSD Cable,UTC Coaxial Control;
- UTC Coaxial Control up to 500 Meters;
- Application:Indoor Only;
- Wall Mounting Bracket Optional;
- Double Glass + Hoop Unique Design;
- Multi Languages For Menu;
- Support Dynamic Noise Reduction;
- Outdoor IP66 Weatherproof Standard;
- Power input:DC 12V;

Construction:



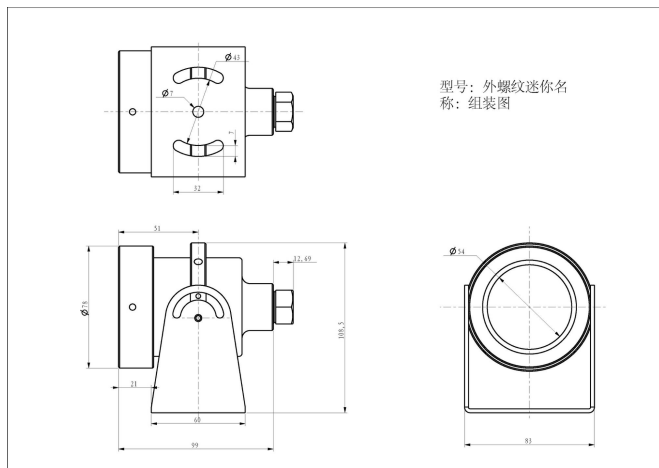


Parameters:



Model No.	CAR-F4F-104
System	PAL
Resolution	720P
Illumination	0.001 LUX / F1.2
DNR	3D
Pixels	1280 (H) ×800 (V)
LENS	Built-in Megapixel 2.8mm Fixed Lens
IR LED	Built-in 5:36pcs IR LED
IR Distance	10 Meters
Mode	AHD
OSD	Support OSD Cable,UTC Coaxial Control
UTC	UTC Coaxial Control Up to 500 Meters
S/N Ratio	>46dB
Gamma R.	>=0.45
Electronic Shutter	1/50 ~ 1/100000s
White Balance	ATW/MANUAL
AGC	AUTO(4 STEP)
Video Out	Aviation x 1
Power In	12V DC 2A
Materials	304 Stainless Steel
Protection Level	Ingress protection: IK08 (IEC 62262:2002), IP68 (IEC 60529-2013)
Explosion-Proof Protection	ATEX: II 2G Ex db IIC T6 Gb/ II 2D Ex tb IIIC T80°C Db IP68 IECEx: Ex db IIC T6 Gb /Ex tb IIIC T80°C Db IP68 For explosive gas atmospheres, the maximum surface temperature is 85°C; For flammable dust atmospheres, the maximum surface temperature is 80°C; IIC: for explosive gas atmospheres other than mines susceptible to firedamp;For explosive gas mixture atmospheres: Zone 1,2,21,22.
Atmospheric Pressure	80KPa ~ 106KPa
Outlet Hole	G-3/4

3	DC12V	3	LEFT				
		4	UP				
		5	MENU				
		6	GND				

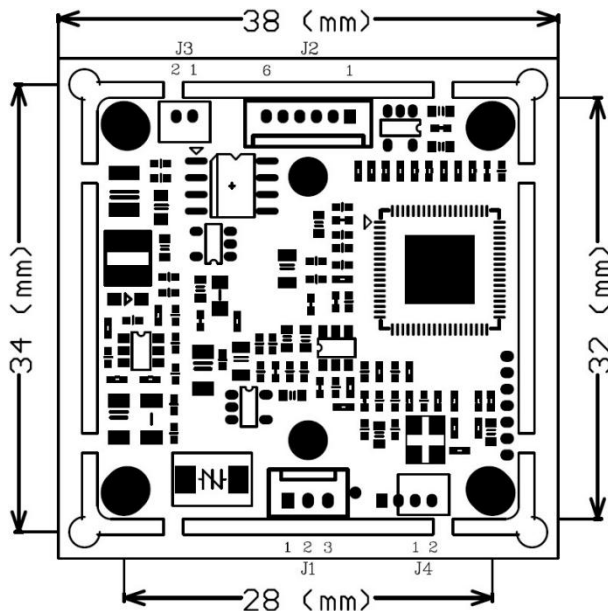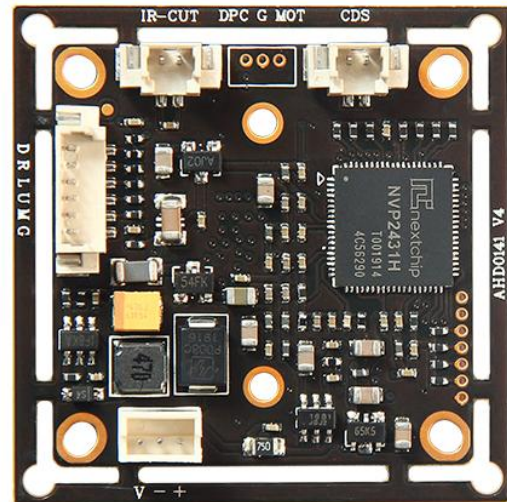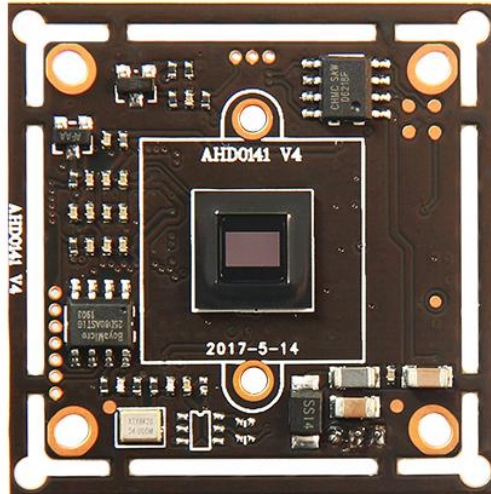

J1	J2	J3	J4
1 VIDEO	1 DOWN	1 IR-CUT1	1 CDS
2 GND	2 RIGHT	2 IR-CUT2	2 GND