




LC Adapter Specification

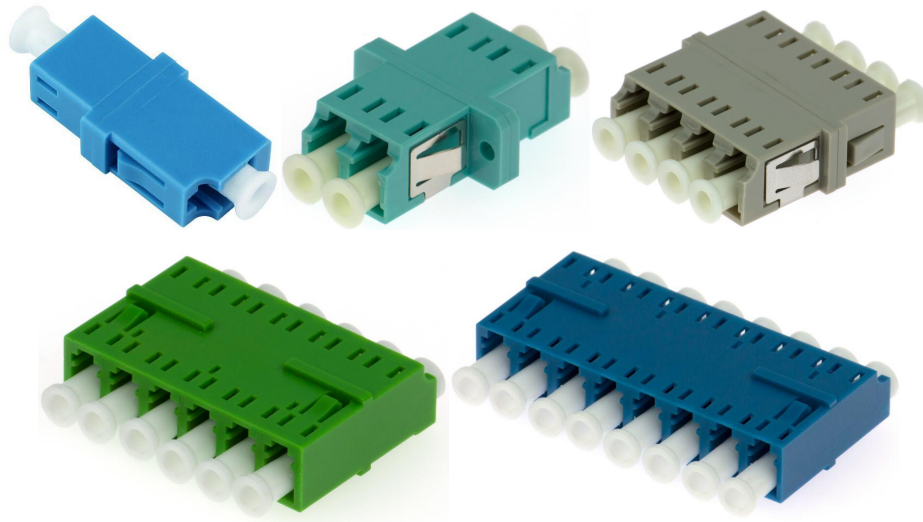

Features:

- Singlemode and Multimode
- Zirconia sleeves or Phosphor bronze sleeves
- NTT standard compatible
- Available without flanges or with flange for simplex/duplex to save pane
- Up to 12 Ports high density for patch panel
- Meet JIS5974 and bellcore GR-326 standard
- Compliant with IEC874-14 & IEC874-19
- All parts compliant with ROHS

Application:

- Telecommunication
- CATV
- LAN & WAN
- Network
- Broadband
- FTTH

Parameter:

Product	Adapter	
Mode	SM	MM
Insertion Loss	≤0.2dB	≤0.2dB
Mating Durability(500 timer)	Additional Loss≤0.1dB	
Temperature Stability(-40℃~85℃)	Additional Loss≤0.2dB	
Operating Temperature	-40℃~+85℃	
Storage Temperature	-40℃~+85℃	