

XMEye HD-IP PTZ Dome

Model: HS-XMP-2005

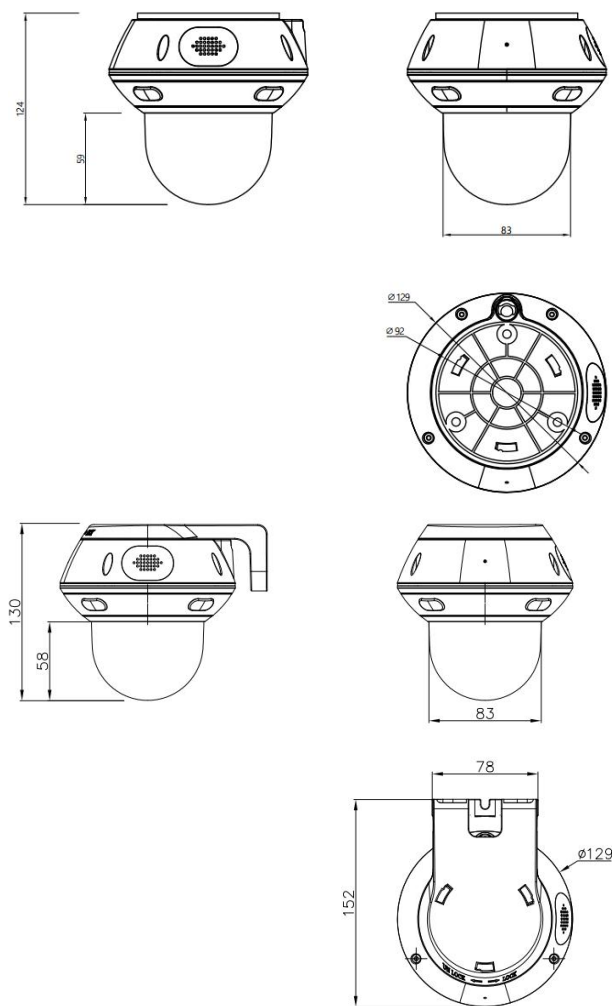


Features:

- 4X Zoom, 5MP/4K, 2 inch, IP66, IK10
- HD-IP PTZ dome, full metal body construction
- Built-in Mic & speaker, support two-way audio
- TF card slot(max 256G)
- Support P2P, ONVIF, compatible with HIKVISION, DAHUA, XM NVR ect.
- Support RJ45 network connection
- Optional: POE,
- APP: XMEYE

Technical Specifications

Model NO.	HS-XMP-2005		
Camera			
System Structure	Embedded RTOS design with dual-core 32-bit DSP (NT98566)		
Image Sensor	8.0M 1/2.7" SC8239 Black Light illumination CMOS sensor, color 0.0001Lux@F1.2, black/white 0.0001Lux@F1.2		
Solution	NT98566+ SC8239		
Digital Noise Reduction	2D/3D DNR		
Image Setting	Brightness, contrast, saturation, sharpness, reverse light compensation, fluorescent light anti-flashing, electronic fog, wide dynamic, image flip		
Shutter	1/50(1/60)s ~ 1/10000s		
Lightning Protection	Power supply and network comprehensive lightning protection		
Function	Support OSD, support real-time video transmission, humanoid detection, cloud services, customized other intelligent functions		
Lens			
Lens Focal Length	2.8~12mm		
Field of View	Wide: Diagonal 133° Horizontal: 108.6° Vertical: 56.2° Tele: Diagonal 36.7° Horizontal: 32° Vertical: 18°		
Aperture Value	F1.66(Wide) ~ F3.03(Tele) ±5%		
Rotation Control			
Range	Pan:0- 340° Pan: 0-90°		
Speed	Pan: 22°/s Tilt:15°/s		
Video			
Video Compression	Support H.265+/H.265/H.264;Code stream 0.1M~8Mbps adjustable; Frame rate 1~30 fps adjustable		
Image Output	Main Stream: 8MP 3840*2160@15fps;5MP 2880*1616@25fps;4MP 2560*1440@25fps; 2MP 1920*1080@25fps;		
	Sub-Stream: 800*448@25fps;		
Alarm	APP alarm		
Network			
Protocols	Support RTSP/ FTP/ DHCP/ NTP/ UPNP/ Onvif/ HIKVISION private protocol, etc.		
APP			
Mobile View	XMEye (Android, IOS)		
Interface			
Communication Interface	1 RJ45 10 M / 100 M Ethernet interface		
TF Card	Max support 256G		
Microphone	Built in		
Speaker	Built in		
Reset	Support		

Light	
IR Distance	Up to 15 m
LEDS	8 pcs IR LED
General	
Power Supply	DC: 12V±25 %
Power Connector	Φ5.5mm circular interface
Power consumption	DC12V, Consumption: 3~15W
Operating Conditions	-30℃ ~ 45℃
Factory Data Reset	Support software to restore factory settings
Material	Metal + plastic
Weather Proof Rating	IP66
Accessories	
Packaging Accessories	Waterproof Cap*1, User Manual*1, Certificate of Conformity*1, Screw Pack*1, Bracket*1, Power Supply*1
Dimension	
 Technical drawings of the device showing dimensions: - Front view (top left): Overall height 124, mounting bracket height 58. - Top view (top right): Width 83. - Side view (middle left): Overall height 130, mounting bracket height 58. - Bottom view (middle right): Width 83. - Bottom view (bottom right): Mounting hole diameter Ø129, mounting bracket width 78, overall width 152.	