

SWITCH / ANTI-VANDAL SWITCH

PBM12 M12 BUSHING

ANTI-VANDAL SWITCH, UP TO 0.5A 48VDC, NON-ILLUMINATED TYPE

[PDF Download](#)[Get Information](#)[ZOOM IN](#)

Feature

- I IP67 protection level for long case, IP65 level for short case
- I Non-illuminated type
- I Function with SPST OFF-(ON), & SPDT ON-(ON) & ON-ON
- I M12 bushing, screw mounting
- I Aluminum alloy, brass or Stainless steel body material
- I Curve button for SPST, raised button for SPDT type
- I Solder terminals

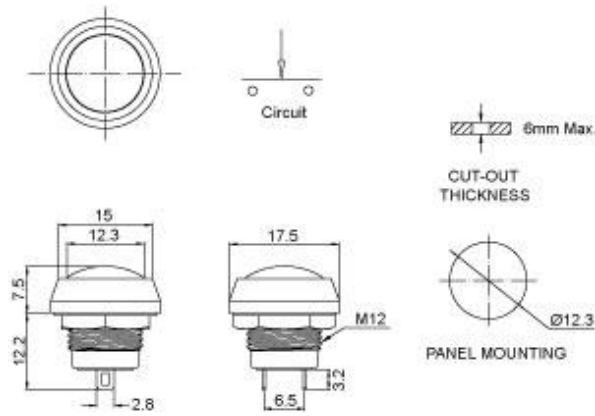
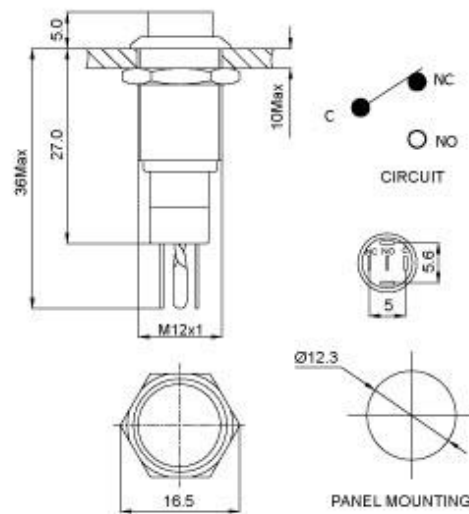
Specification

- I Rating: 0.5A 48VDC, 0.2A 50VDC, 0.2A 250VAC
- I Contact resistance: 50m Ω (max.) initial
- I Insulation resistance: 100M Ω (min)
- I Dielectric strength : 1,000VAC for 1 minute
- I Operating Life: 200,000 cycles

How to Order:

PBM12	11M	R	R	NNN	A6	S
SERIES SYMBOL PBM12 SERIES SPST short case	FUNCTION 11M SPST OFF - (ON)	BUTTON TYPE R CURVE	BUTTON COLOR W WHITE R RED G GREEN U BLUE Y YELLOW B BLACK S NATURAL (METAL)	LAMP NNN WITHOUT LAMP	BODY TYPE A6 ALUMINUM ALLOY, BLACK OXIDE B1 BRASS, MIRROR CHROME PLATED B2 BRASS MIRROR NICKEL PLATED SN STAINLESS STEEL	TERMINAL S SOLDER TERMINALS
PBM12	13M	H	S	NNN	B1	S
SERIES SYMBOL PBM12 SERIES SPDT long case	FUNCTION 13M SPDT ON - (ON) 13Z SPDT ON - ON	BUTTON TYPE H RAISED	BUTTON COLOR S NATURAL (METAL)	LAMP NNN WITHOUT LAMP	BODY TYPE B1 BRASS WITH MIRROR CHROME PLATED	TERMINAL S SOLDER TERMINALS

Item

**PBM12-12-11M-R*-NNN-A6-S****PBM12-13Z-HS-NNN-B1-S****PBM12-11M-RR-
NNN-A6-S****PBM12-11M-RB-
NNN-A6-S****PBM12-11M-RG-
NNN-SN-S****PBM12-11M-RS-
NNN-SN-S**



PBM12-11M-RU-
NNN-B2-S



PBM12-11M-RY-
NNN-B2-S



PBM12-11M-RW-
NNN-B2-S



PBM12-13Z-HS-
NNN-B1-S

 Start Print

Canal Components Inc. Tel:+886-2-29161263 Fax:+886-2-29117574
Copyright ©2009 Canal Components Inc.. All rights reserved.