



Customer Approve By


.....		
A0	1'ST DESIGN	YHZ 2022.03.19
A1	改接口顺序，17脚拉出备用	YHZ 2022.03.25
A2	修改FPC长度	YHZ 2022.06.01
A3	修改视角和VOP	YHZ 2022.06.13

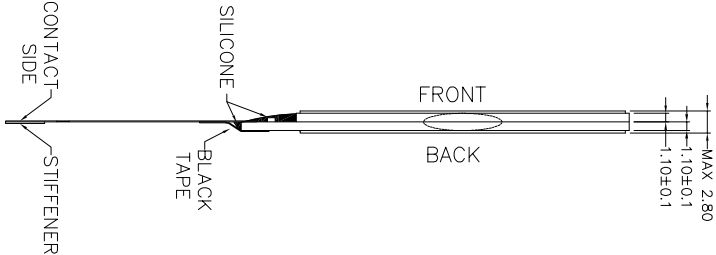

DB7	1
DB6	2
DB5	3
DB4	4
DB3	5
DB2	6
DB1	7
DB0	8
RST	9
WR	10
RD	11
CD	12
CS0	13
VSS	14
VDD	15
NC	16
TST4	17
NC	18

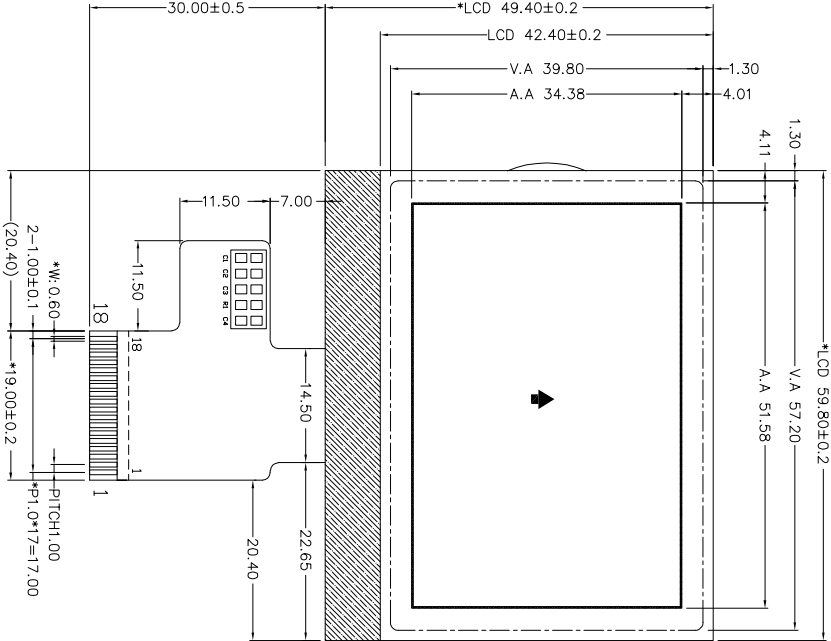

DETAIL
SCALE:10:1

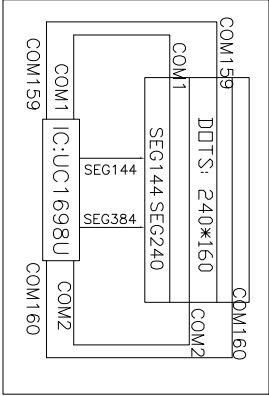

Note:

1.Display Mode:

2.Driving Condition:

3.Viewing Direction:

4.Operating Temp:

Storage Temp:

5.LCD Connector:

6.IC:

7.Backlight:

8.Unspecified tolerance is ±0.20mm

9.RDHS Request

10.CONTROL DIMENSION: *

11.REFERENCE DIMENSION: ()

12.Customer P/N:

FSTN/POSITIVE/TRANSFLECTIVE
1/160DUTY,1/10BIAS,VDD=3.3V,VLCD=13.5V
12:00 o'clock

-20~+70℃
-30~+80℃

F0G

UC1698U



深圳金视界光电科技有限公司
SHENZHEN GOLDEN VISION OPTOELECTRONIC CO., LIMITED

SCALE:1/1	UNIT:mm	DATE	PAGE:1/1	APPROVE	CHECK	DESIGNE
MODEL NO.:	GVH240160104-FLFN					
PART NO.:						