


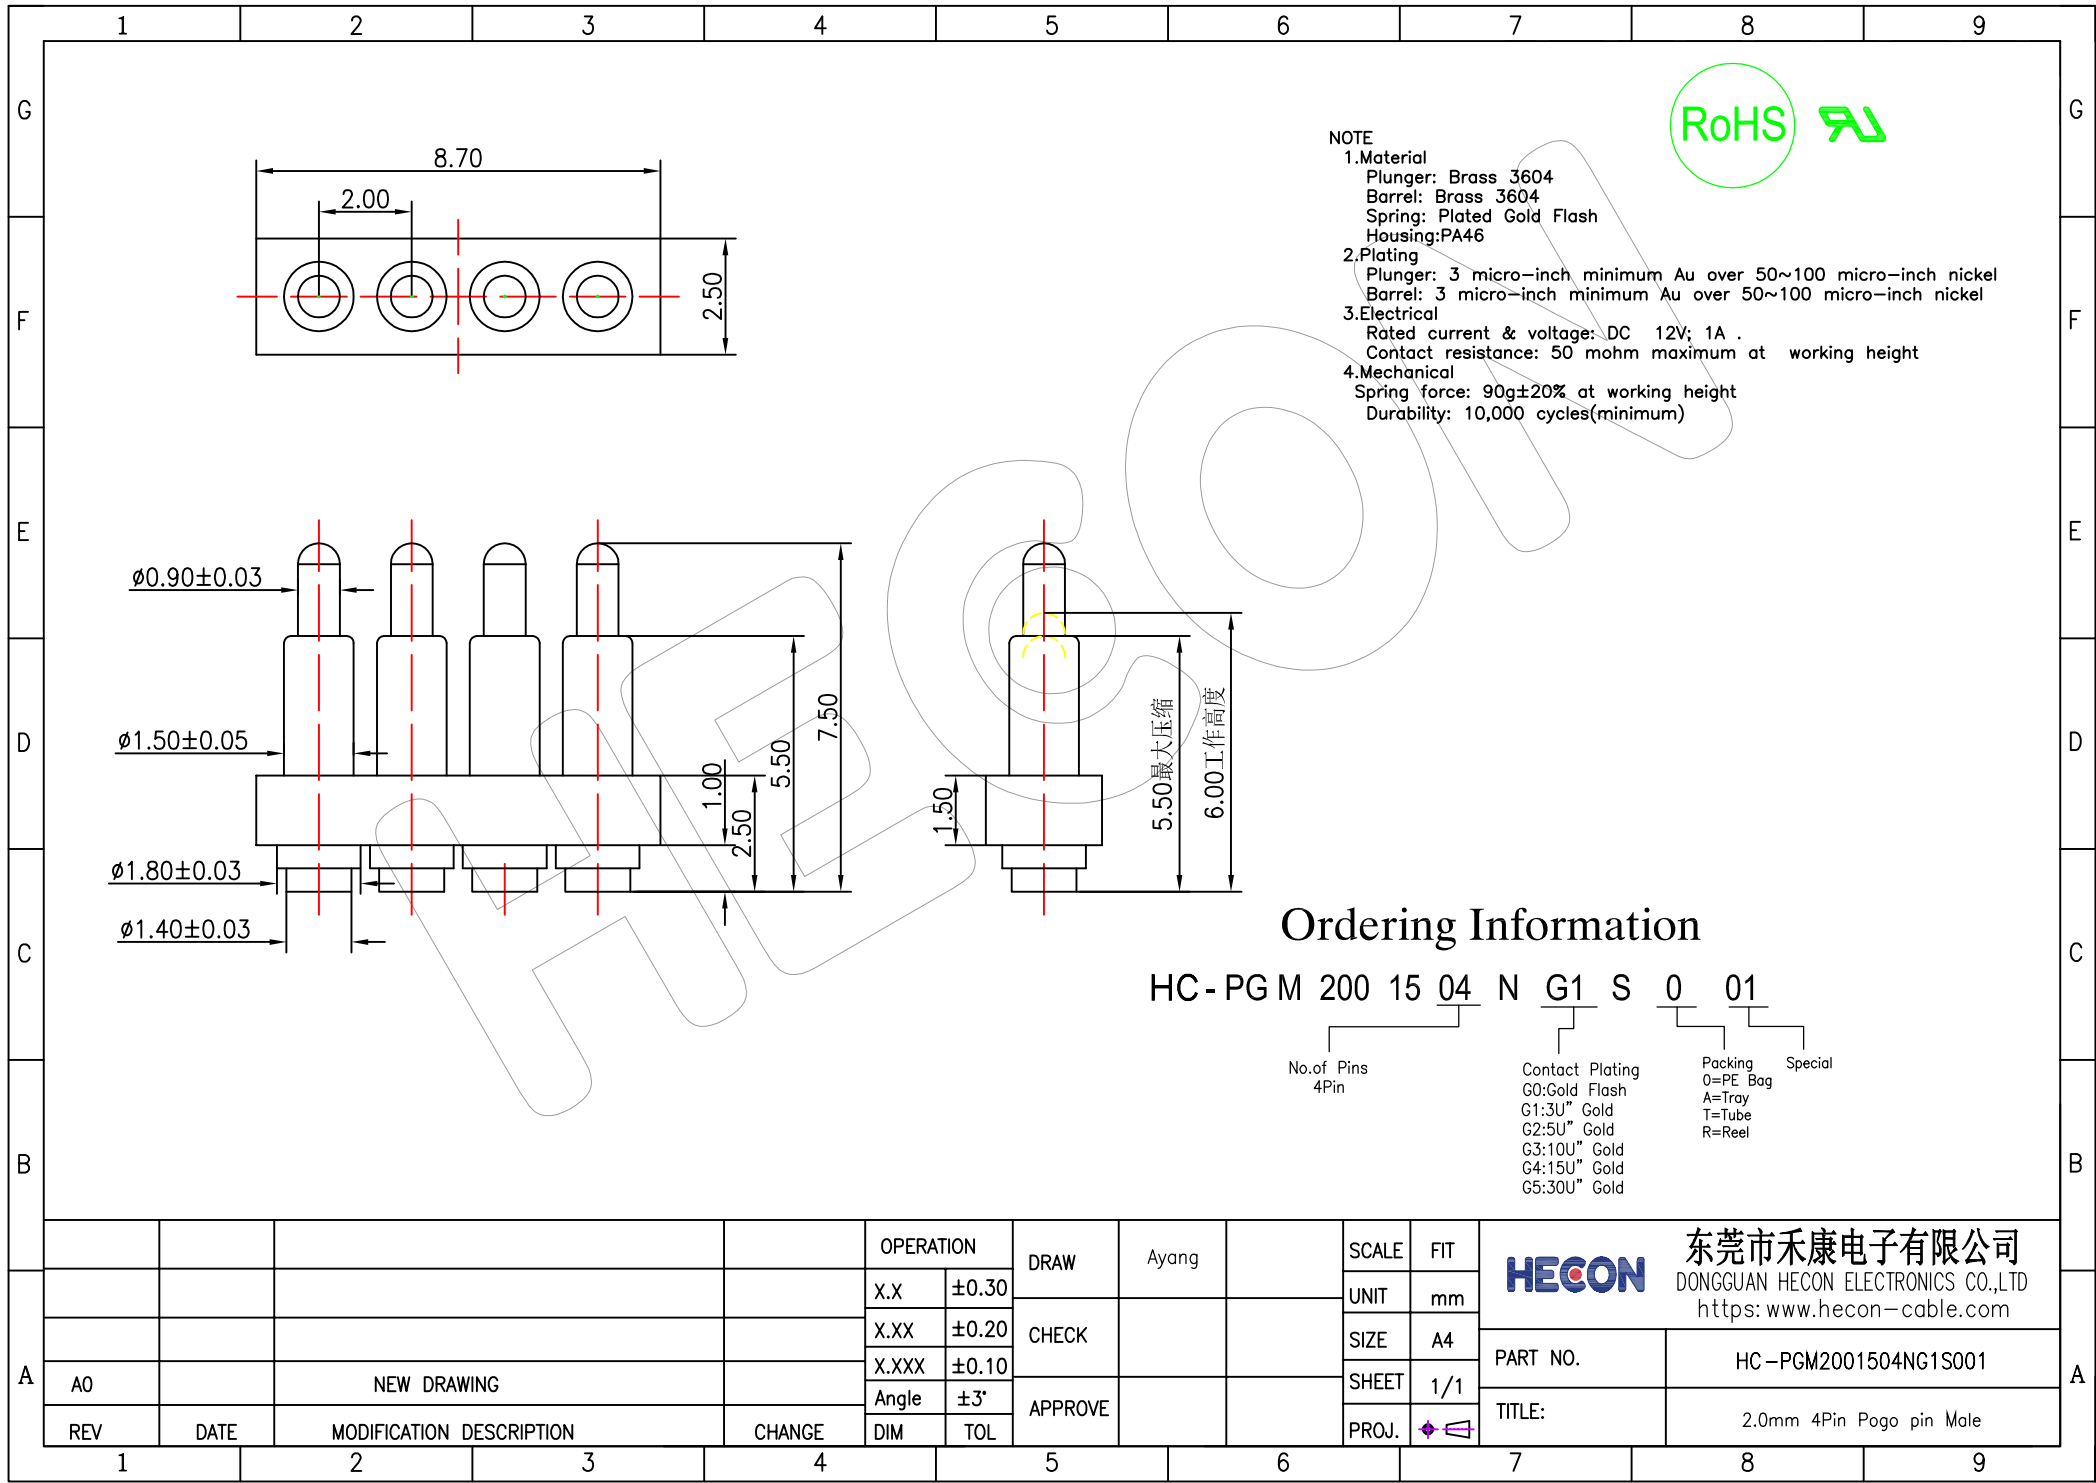

NOTE

1.Material
Plunger: Brass 3604
Barrel: Brass 3604
Spring: Plated Gold Flash
Housing:PA46

2.Plating
Plunger: 3 micro-inch minimum Au over 50~100 micro-inch nickel
Barrel: 3 micro-inch minimum Au over 50~100 micro-inch nickel

3.Electrical
Rated current & voltage: DC 12V; 1A .
Contact resistance: 50 mohm maximum at working height

4.Mechanical
Spring force: 90g±20% at working height
Durability: 10,000 cycles(minimum)

Ordering Information

HC-PG M 200 15 04 N G1 S 0 01

No.of Pins
4Pin

Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold

Packing
0=PE Bag
A=Tray
T=Tube
R=Reel

Special

				OPERATION		DRAW	Ayang	SCALE	FIT	HECON 东莞市禾康电子有限公司 DONGGUAN HECON ELECTRONICS CO.,LTD https://www.hecon-cable.com			
				X.X	±0.30								
				X.XX	±0.20	CHECK		UNIT	mm	PART NO.	HC-PGM2001504NG1S001		
				X.XXX	±0.10								
A0		NEW DRAWING		Angle	±3°	APPROVE		SHEET	1/1	TITLE:	2.0mm 4Pin Pogo pin Male		
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL								
1		2	3	4		5	6	7	8	9			