

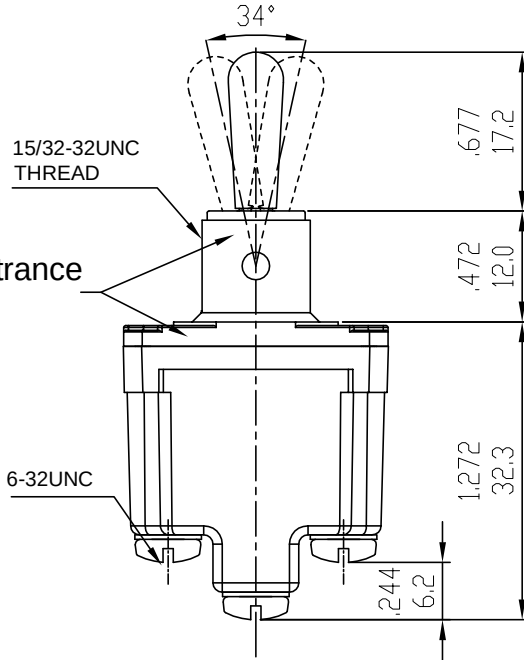


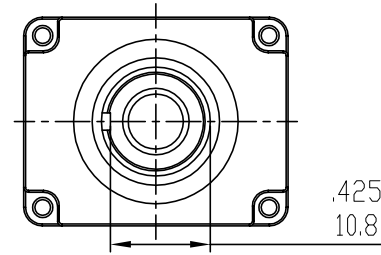

Sealed to prevent entrance of liquids or dust

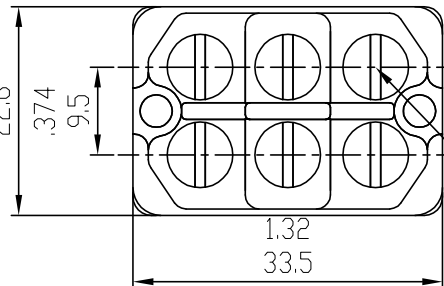

1.Specification

1.1 Electrical:

Contact Resistance:30mΩ MAX

Insulation Resistance:1000MΩ

Dielectric Withstand:No discharge, flashover or breakdown at 2500VAC 1Minute

1.2 Mechanical Characteristic:

Operation Life:10,000 Cycles

2.Material



Body:Nylon(UL94V-0)

Contact & Terminals:Copper alloy

Shell:Stainless Steel

Bushing:Zinc alloy

Actuator:Copper alloy

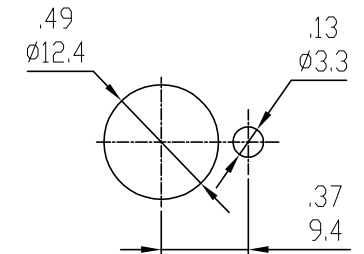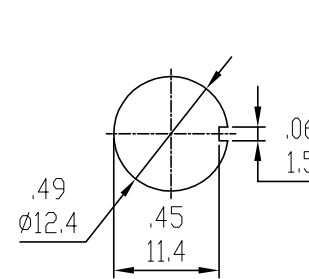

Model No.	Switching Position		
6023	ON	NONE	ON
6023A	ON	NONE	(ON)
6024	ON	OFF	ON
6024A	(ON)	OFF	(ON)
6014B	ON	OFF	(ON)
Term. Comm.	2-1,5-4	OPEN	2-3,5-6
Schematic			

NO.	Edition	Modified Contents	Name	Date	Nominal Tolerance		Part no.	Dwg no.	Part Name.	Scale	Unit m/m (inch)	Check	Drawer	Date	Edition
					Range	Tolerance									
1	A0	NEW	陈代学	20.06.28	0 ~ 1	±0.10	T602X-T1ES-X-H		深圳易凯达科技有限公司 WIN-KARE TECHNOLOGY CO.,LTD.	1:1				2020.06.28	A0
					1 ~ 4	±0.20									
					4 ~ 16	±0.30			T60-T/ 4PDT Sealed Toggle Switches						