


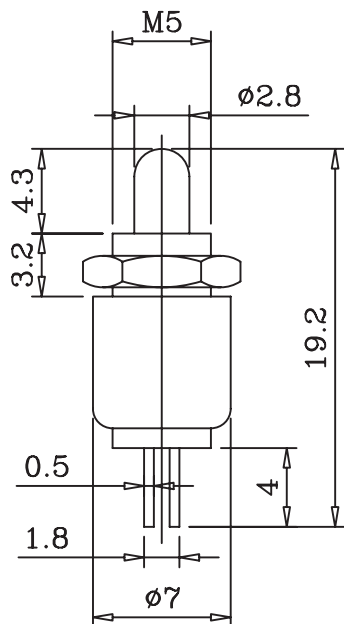

Specifications:

- 1.Circuit: Push A:(ON)–OFF
- 2.Rating: AC 125V 0.5A
- 3.Contact Resistance: DC 5V 1A 30mΩ (max.)
- 4.Insulation Resistance: DC 500V 100MΩ (min.)
- 5.Withstand Voltage: AC 500V 1 Minute
- 6.Operating Force: 100±10g
- 7.Life Cycle: 10,000 Cycles
- 8.OPERATING TEMPERATURE RANGE: -25°C~ +85°C

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0.3(\text{mm})$.

[illegible]