



RJ45 Connector Single Port




Feature:

- . Standard assembly dimension
- . Single ports connector , RJ45 8P8C
- . Contact: Phosphor Bronze, gold flashed plated
- . Metal shielding: 0.25mm thickness, nickel plated
- . Housing: PBT+30%GF UL94V0 rated
- . Voltage rating: 125 VAC
- . Current rating: 1.5 Amp
- . Contact resistance: 30 mΩ Max
- . Insulation resistance@500VDC: 1000 MOhms Max
- . Lead-free process, ROHS compliant

Schematic

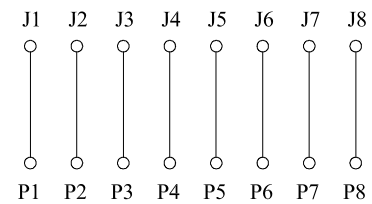

Mechanical

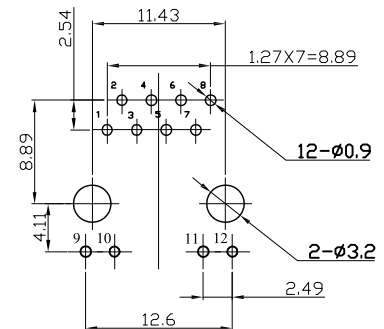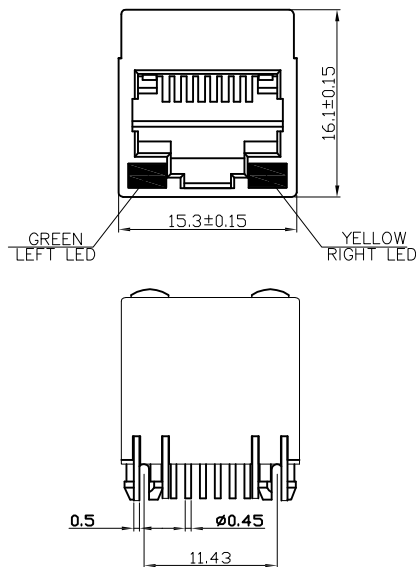

ORDER INFORMATION

A	M	J	01	88	4	G1	Z	0	E	P	—129
Layer A: Single B: Dual	M: Bottom /Reverse W: Top /Positive	J: Jack S: Short O: Open F: Fis N: Normal H: Height M: Multiple	Port No.	44: 4P4C 62: 6P2C 64: 6P4C 66: 6P6C 88: 8P8C 18: 10P8C 10: 10P10C	1: SMT RA 2: SMT VT 3: DIP RA 4: DIP VT 5: DIP 45° 6: DIP Upright	G1: Gold Flash G2: 5u" G3: 10u" G4: 15u" G5: 30u" G6: 50u" G7: 3u" G8: 6u"	P: Plastic E: Metal w/1 EMI D: Metal w/2 EMI Z: Metall w/o EMI	Filter 0: w/o Filter 1: w/Gigabyte 2: w/100/10	LED light A: w/o Led B: 2 x Green C: 2 x Yellow D: 2 x Red E: G n Y	Height: P: 16.1H	