
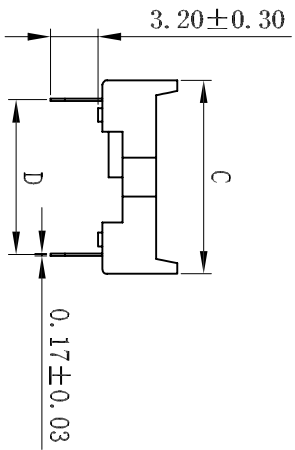
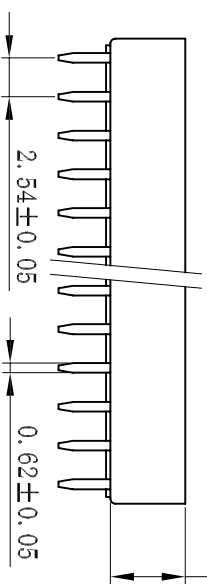


MATERIAL & FINISH

Contact: bronze,Tin plating
Contact Plated:1A/Tin
Withstanding Voltage:AC1000V 1minute
Contact Resistance:20MΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-55°Cto125°C
Insulator material:30% Glass fibre
Filled PBT UL94V-0

Dimensions

Contacts	Dim A	Dim B	Dim C	Dim D
6	7.62	5.08	10.16	7.62
8	10.16	7.62	10.16	7.62
10	12.70	10.16	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
28	35.56	33.02	10.16	7.62
28	35.56	33.02	12.70	10.16
24	30.48	27.94	17.78	15.24
28	35.56	33.02	17.78	15.24
40	50.80	48.25	17.78	15.24
42	53.34	50.80	17.78	15.24
48	60.90	58.42	17.78	15.24
64	81.28	78.74	26.00	22.86

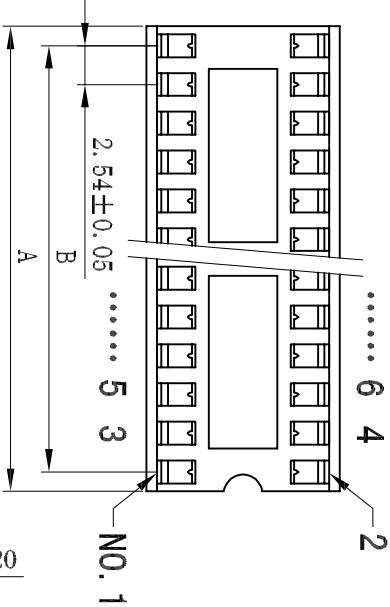

7200-1 XX

PCB LAYOUT



深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO., LTD
Tel: 86-755-2997-5818 Fax: 86-755-2997-5588

No.of
Contacts
06~64

Contact Plating
SNTin
S0Gold Flash/Tin
S25U/Gold/Tin
S310U/Gold/Tin
S415U/Gold/Tin
Standard is N

Width Type
W=Wide
N=Narrow

DIM D
A=7.62
B=10.16
C=15.24
D=22.86

UNLESS OTHERWISE SPECIFIED TOLERANCE		DRAWN NAME:	
X : ±0.3	X° : ±5°	2.54英寸 (方孔) 10座	
X.X : ±0.2	X.X° : ±1°	SIZE	A4
X.XX : ±0.1	X.XX° : ±0.5°	SCALE	N:1
DRAWN:	曾春明	REV	A
DATE:	05/11/11	CHECKED:	
		UNIT	mm
		PROJECT	
		APPROVED:	
		PAGE	1/1