


►50×50 series

M material	S surface	Code
6005-T5	anodized	PCABT

🔴 The cut surface has not undergone anodizing treatment

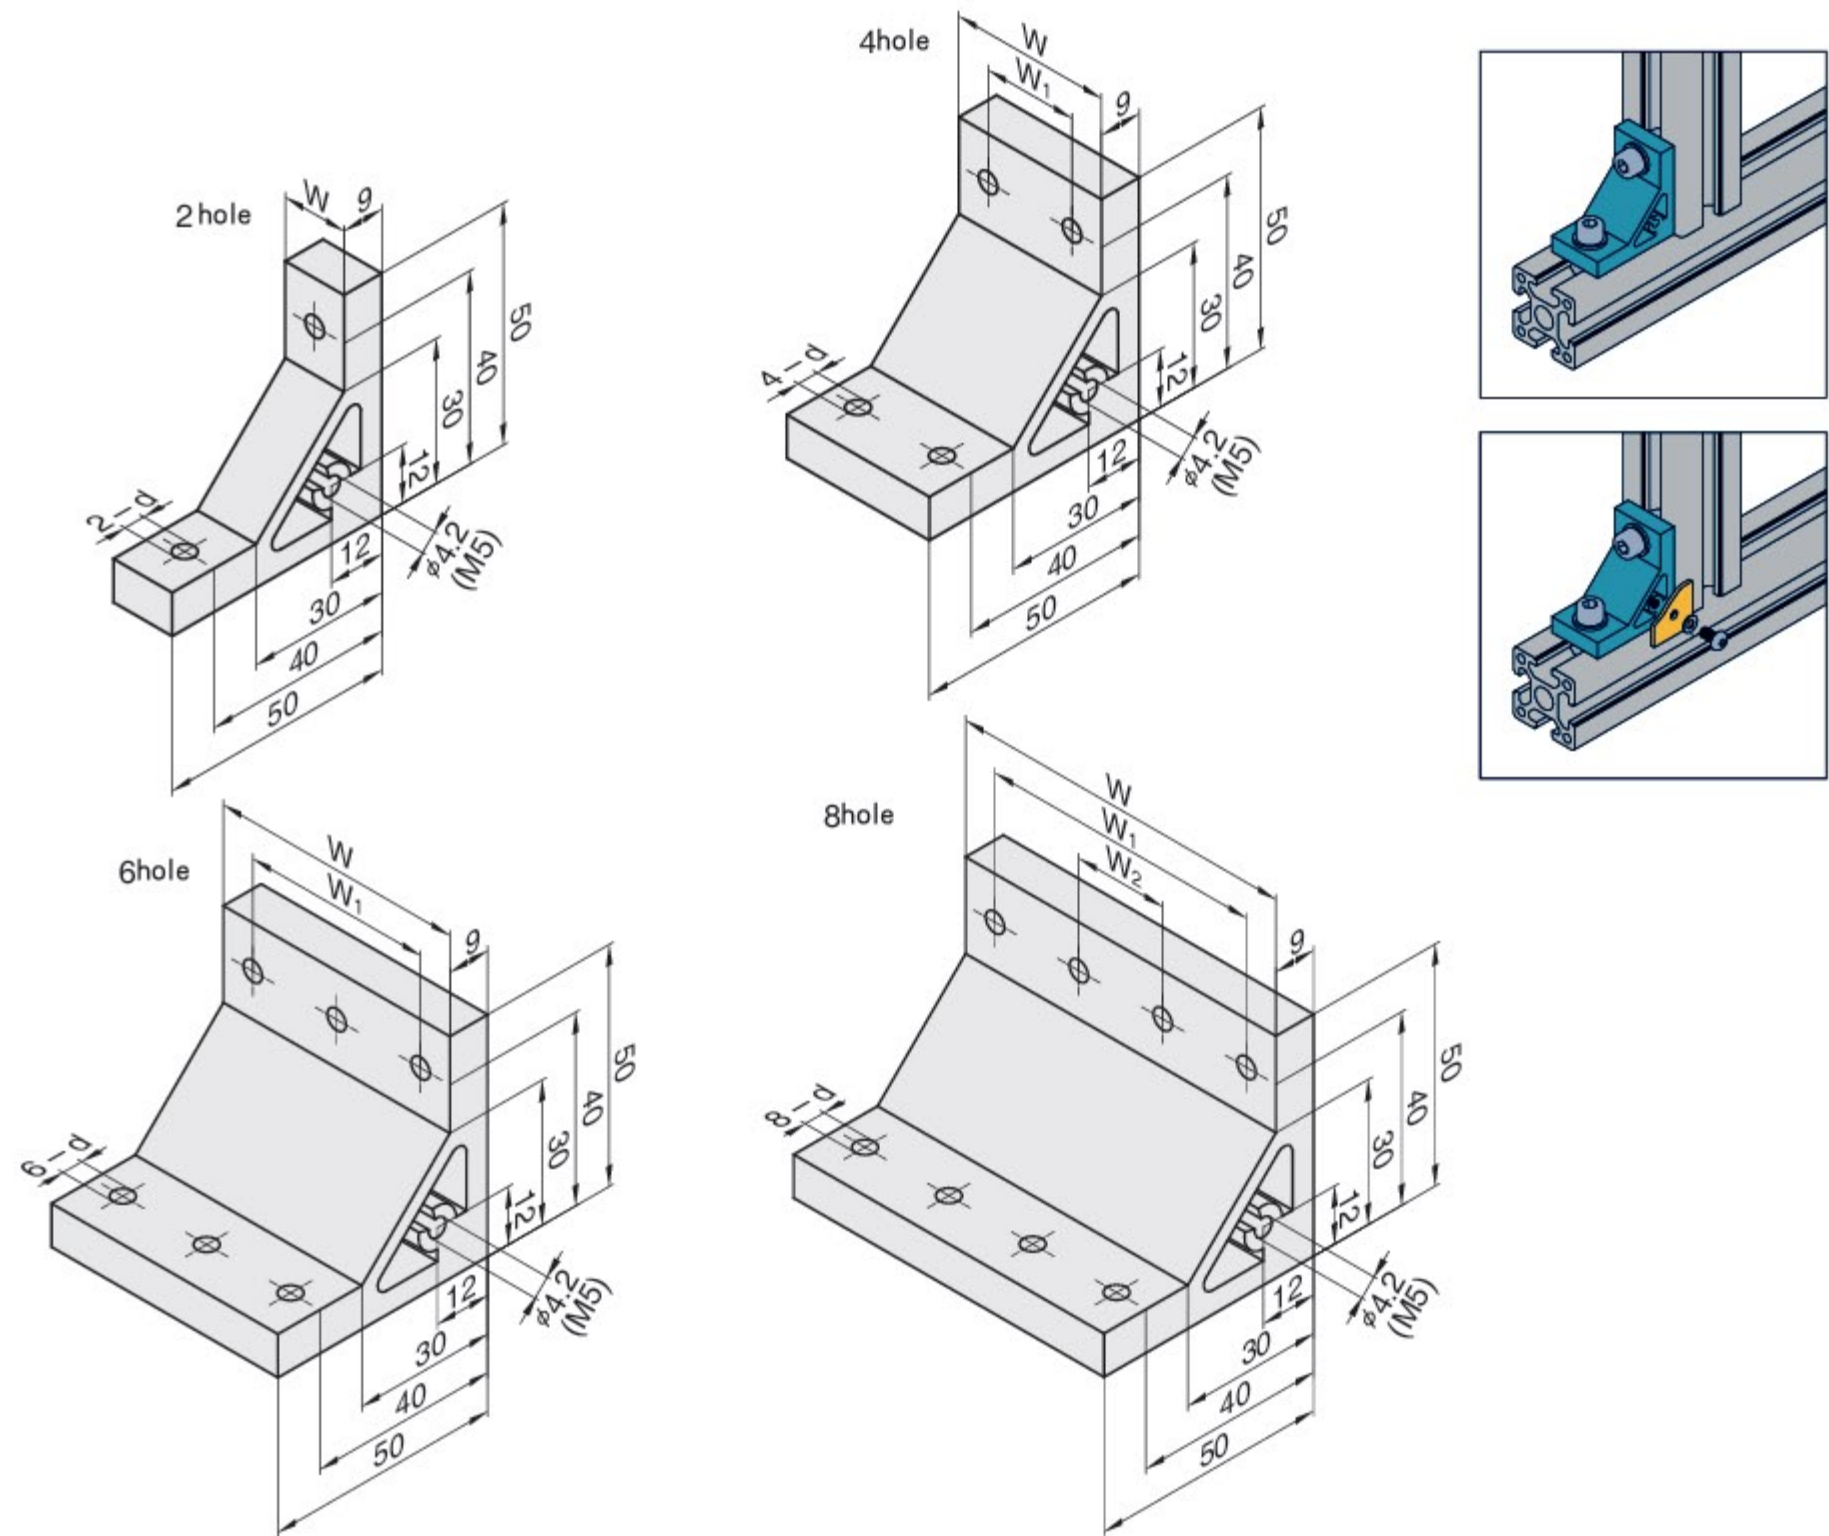

Code No.		mounting hole count	W	W ₁	W ₂	d	weight (g)	additional	
Code	applicable profile							code	component quantity
PCABT	20-2020	2	14	—	—	4.5	31	U,M5	U:2
	20-2040	4	34	20			75		U:4
	20-2060	6	54	40			119		U:6
	20-2080	8	74	60			163		U:8
	30-3030	2	22	—	—	6.5	48	V,M5	V:2
	30-3060	4	52	30			114		V:4
	30-3090	6	82	60			180		V:6
	30-30120	8	112	90			246		V:8
	40-4040	2	30	—	—	8.5	66	D,M5	D:2
	40-4060	2	50	—			110		D:4
	40-4080	4	70	40			154		D:6
	40-40120	6	110	80			242		D:8
	40-40160	8	150	120	40		330		D:2
	45-4545	2	35	—	—	8.5	77		D:2
	45-4560	2	50	—			110		D:2
	45-4590	4	80	45			176		D:4
	45-45180	8	170	135	45		374		D:8
	50-5050	2	40	—	—	8.5	88		D:2
	50-50100	4	90	50			198		D:4
	50-6060	2	50	—			110		D:2

ORDER

Code No.

PCABT40-4080

ADDITION

ORDER


Code No.

(U•V...etc.)

PCABT40-4080

—

D

Code	fasteners Add.	Code	fasteners Add.	Code	M5Tapped Hole Processing
U	 M4×14 bolt galvanized  M4 flat gasket galvanized  PFTN6-M4 nickel-plated T nut	D	 M8×20 bolt galvanized  M8 flat gasket galvanized  PFTN10-M8 nickel-plated T nut	M5	 M5×10  M5×10 bolt galvanized  M5 flat gasket galvanized
V	 M6×16 bolt galvanized  M6 flat gasket galvanized  PFTN8-M6 nickel-plated T nut				