




ABIDE BY WEEE & ROHS


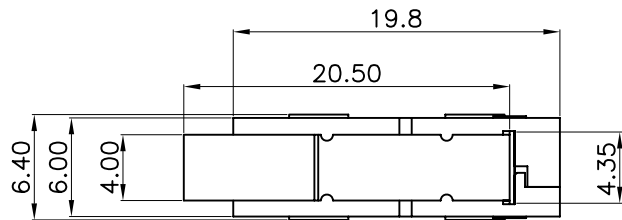


Circuit Diagram

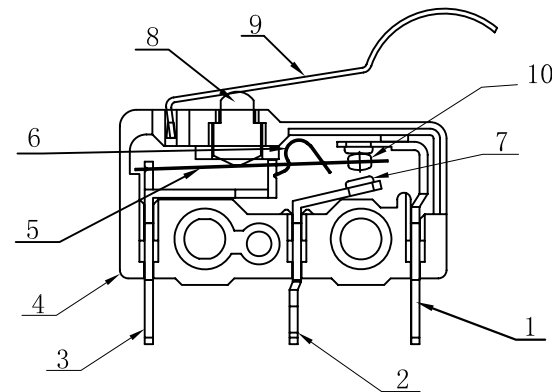

Specification

1. Rating Value: AC125V 5A; AC250 3A
2. Contact Resistance: $100\text{m}\Omega$ max
3. Insulation Resistance: $100\text{M}\Omega$ min
4. Withstand Voltage: AC1000V (50-60Hz) for 1 minute
5. Life Test: 1,000,000 Cycles
6. Press Force: $25 \pm 10\text{gf}$
7. Pre-Travel: $1.7 \pm 0.5\text{mm}$
8. Electrical life: 8,000 cycles

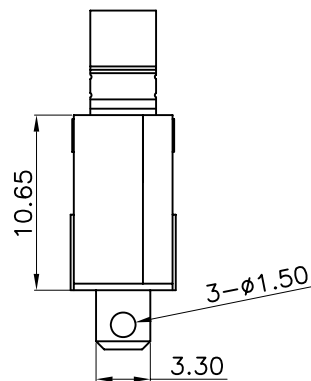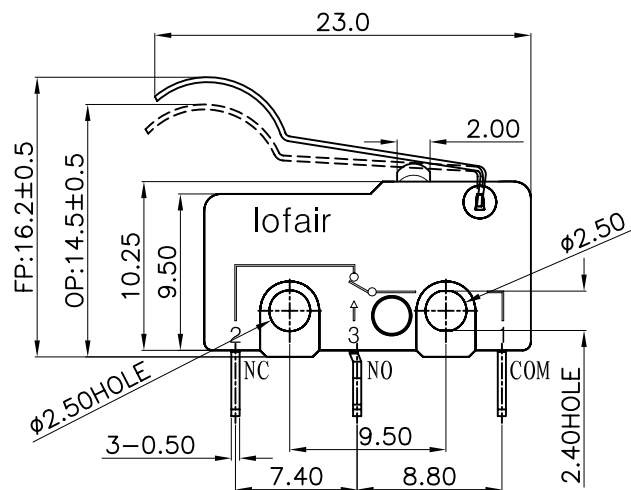

10	Contact thing		1	Ag		
9	LEVER		1	STAINLESS STEEL		
8	ACTUATING SHAFT		1	PBT	BLACK	UL94HB
7	CONTACT		1	NATURE COPPER	Plating Silver	
6	REED		1	BERYLLIUM- BRONZE		
5	SHRAPNEL		1	BERYLLIUM- BRONZE		
4	BASE		1	PBT	BLACK	UL94HB
3	TERMINAL	3	1	BRASS	Plating Silver	
2	TERMINAL	2	1	BRASS	Plating Silver	
1	TERMINAL	1	1	BRASS	Plating Silver	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE	 Kaiih	东莞市凯华电子有限公司 KAIHUA ELECTRONICS CO.,LTD		
DRAWN	Wanwenxue	Jul.01.06					
CHECKED	ChenYinjiang	Jul.01.06	TITLE:	Micro Switch			
APPROVALS	ChenYinjiang	Jul.01.06	PART NO.	MI191003W05			
TOLERANCES ARE	30<L	±0.30	ANGLE	UNIT: mm	SCALE: 2:1	PROJ: 	
	10<L≤30	±0.20					
	5<L≤10	±0.15	±2°	DRAWING NO.		SHEET 1 OF 1	
	L≤5	±0.10					

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			