




KCD1-B8

额定电流、电压
6A 250VAC/10A 125VAC T125
接触电阻: $\leq 50\text{m}\Omega$
绝缘电阻: $\geq 100\text{M}\Omega$
介电强度: $\geq 1500\text{VAC}/5\text{S}$
电气寿命: ≥ 10000 次

Rating:
6A 250VAC/10A 125VAC T125
Contact resistance: $\leq 50\text{m}\Omega$
Insulation resistance: $\geq 100\text{M}\Omega$
Dielectric intensity: $\geq 1500\text{VAC}/5\text{S}$
Life: ≥ 10000 Cycles

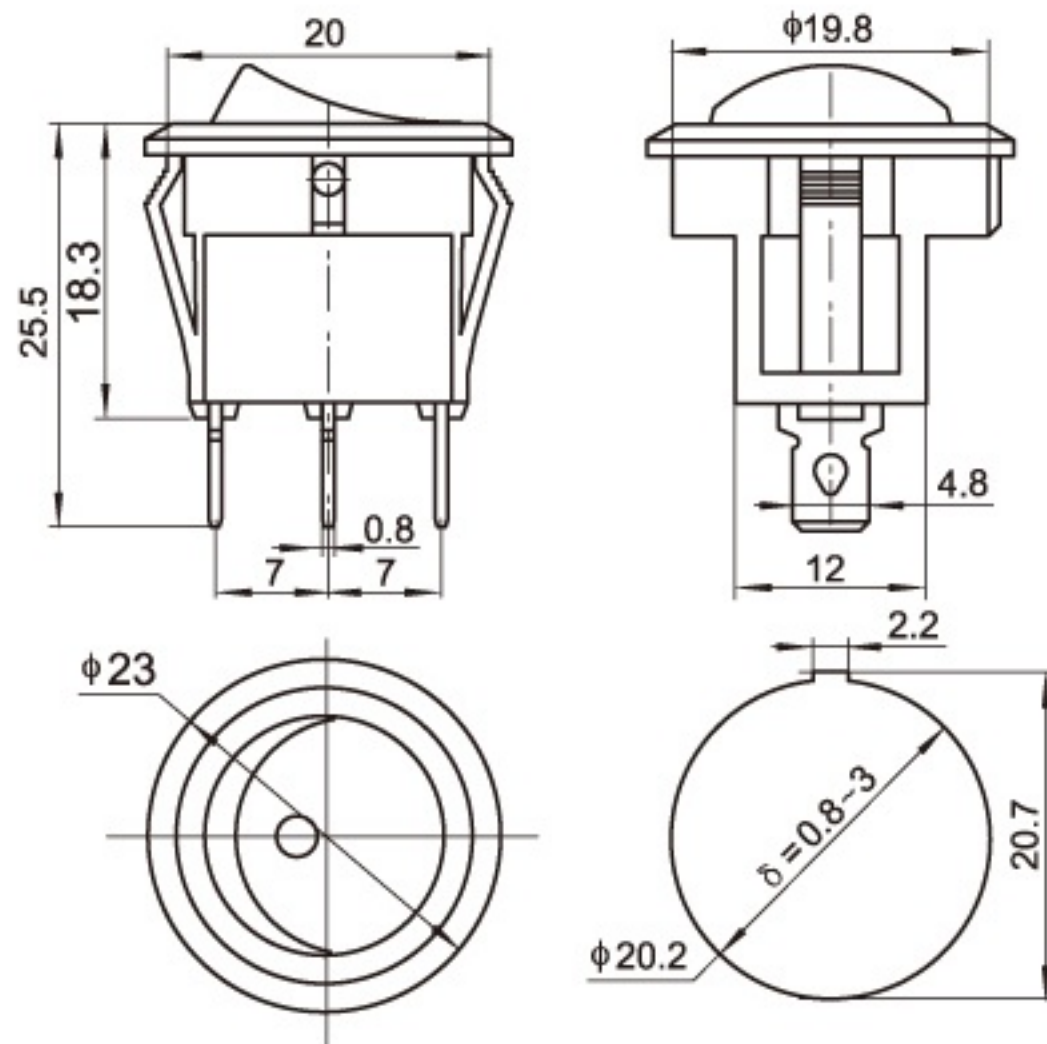


序列号


电路图

端子规格

KCD1-B8-101

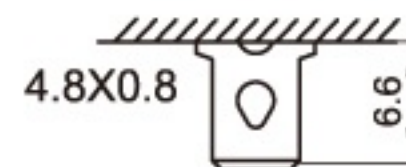

KCD1-B8-102

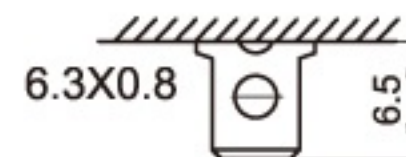

KCD1-B8-103



KCD1-B8-101/N

