
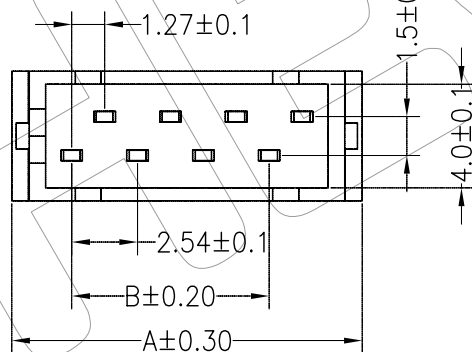
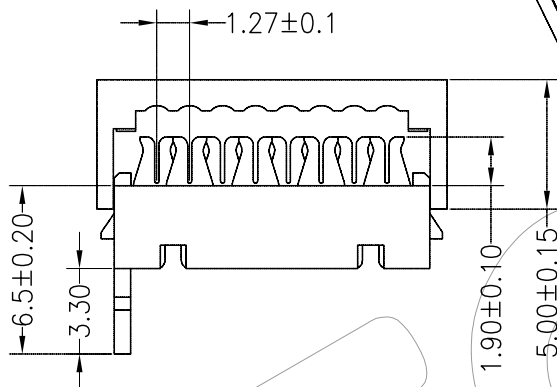
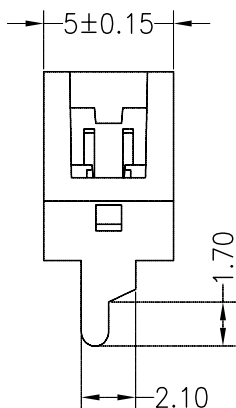


RoHS

SPECIFICATIONS

Rated Current:1.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 5 seconds)

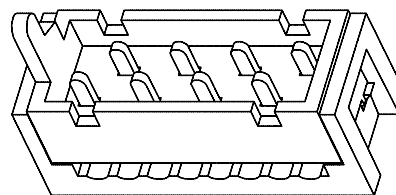

POLES	DIM.A	DIM.B
04	8.45	2.54
06	10.99	5.08
08	13.53	7.62
10	16.07	10.16
12	18.61	12.7
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
24	33.85	27.94
26	36.39	30.48

Ordering Information

HC-MH XX M I SN X N T 01

No.of
Pins
04~26P

Insulator Material
A=PBT
E=PA46

Packing
T=Tube

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
Angle	±3°
DIM	TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-MHXXMISNXNT01

TITLE:

Micro Match Connector IDC Type

A0

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

DIM

TOL

DRAW

Ayang

CHECK

APPROVE

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

HECON 东莞市禾康电子有限公司
DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-MHXXMISNXNT01

TITLE:

Micro Match Connector IDC Type