



威固电子户外全彩系列产品规格书

OUTDOOR FULL COLOR SERIES PRODUCT SPECIFICATION



户外常规 P2.5-160 表贴三合一

OUTDOOR CONVENTIONAL PANEL P2.5- 160 SMD 31N1 PRODUCT SPECIFICATION

产品规格书

户外全彩系列产品规格书


OUTDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

技术参数 TECHNICAL PARAMETERS

模组 Unit Module	项目	Item	参数	Parameter
	产品型号	Model Number	VG-P2.5-32scan	
	模组尺寸	Module Size	160mm*160mm	
	物理点间距	Physical Pitch	2.5mm	
	物理密度	Physical Density	160000 dots/m2	
	发光点颜色	Pixel Configuration	1R1G1B	
	LED 封装	Package Mode	SMD 3IN1 -1415	
	模组分辨率	Module Resolution	64dots (W)*64dots (H)	
	模组最大功耗	Max Power Consumption	28W	
	模组厚度	Module Thickness	15.5mm	
	模组重量	Module Weight	260g	
	驱动方式	Drive Type	恒流驱动 Constant Drive	
	扫描方式	Scan Mode	1/32 扫描 1/32 Scan	
	接口方式	Port Type	HUB75	
	匹配箱体尺寸	Match Cabinet Size	W480mm*H480mm	
	工作电压 (DC)	Working Voltage	DC 5V	
	防护措施	Protective Measures	三防漆 Three Proofing Paint	

户外全彩系列产品规格书

OUTDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

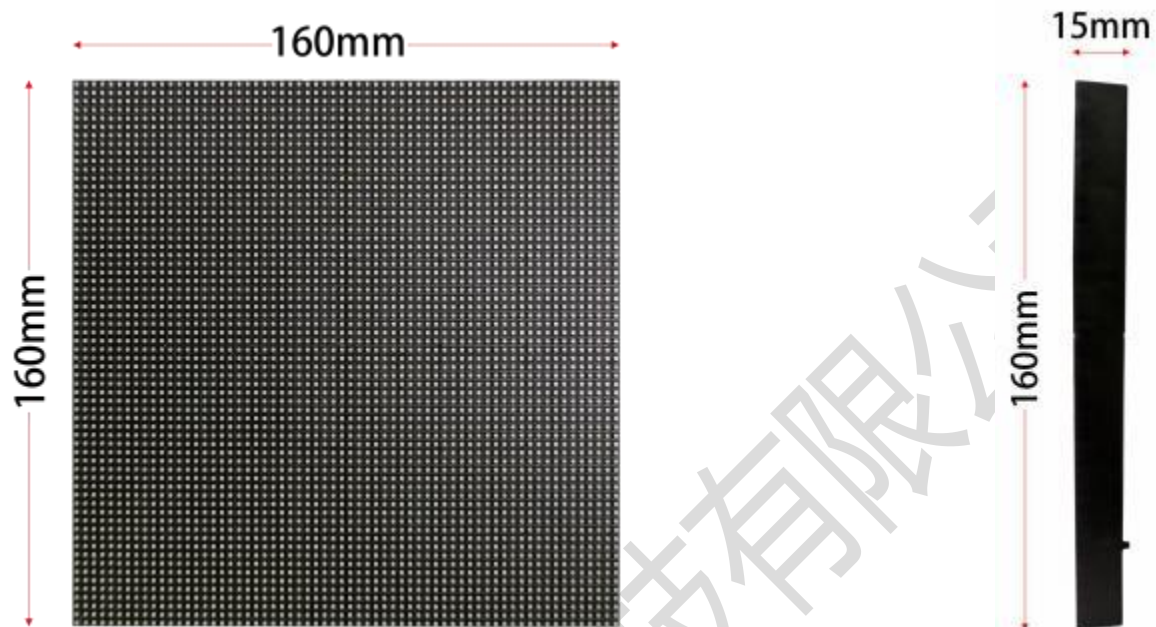

户外全彩系列产品规格书

OUTDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

显示屏参数 Display Parameters	最佳视角	Best Viewing Angle	H:120° ;V:120°
	视距	Recommended Viewing Distance	2.5m-50m
	驱动 IC	Driver IC	北方集创 ICND2163
	画面刷新率	Refresh Rate	3840Hz
	白平衡亮度	Brightness of White Balance	6000cd/m²
	输入电压	Input Voltage	110-220V;AC±10%
	工作温度/湿度	Operating Temperature/Humidity	-20℃~+45℃
	平均功耗	Average Power Consumption	260w/m²
	最大功耗	Max. Power Consumption	900w/m²
	寿命	Life Time	>100000 hours
	坏灯率	Bad Light Rate	<0.0001
	平均无故障时间	MTBF	>5000 hours

户外全彩系列产品规格书

OUTDOOR FULL COLOR SERIES PRODUCT SPECIFICATION

案例分享

CASE SHARING

