






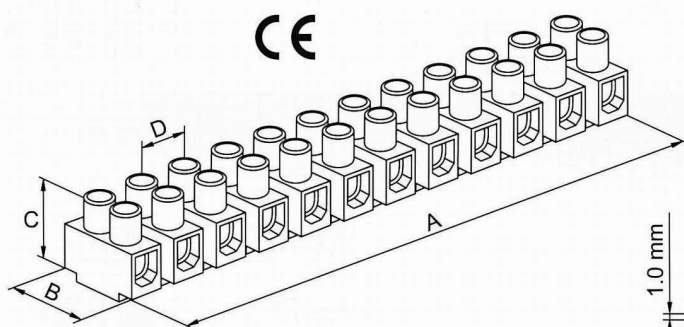

TERMINAL BLOCKS (PA Housing, Steel Insert)

Specification

- Housing: Polyamide 66 (PA 66), white
flame-retardant to UL 94V-2
Working temperature:
T110°C (IEC), 105°C/221°F (UL)
- Terminal Body: Steel, zinc-plated
- Wire Protector: Brass, zinc-plated
- Screw: Steel, zinc-plated
- Strip Length: PA20DS – 5.0 mm/0.20 in.
PA30DS – 6.5 mm/0.26 in.
- 12 poles modular construction, available in pre-cutting
- Can be supplied under private labeling and packing

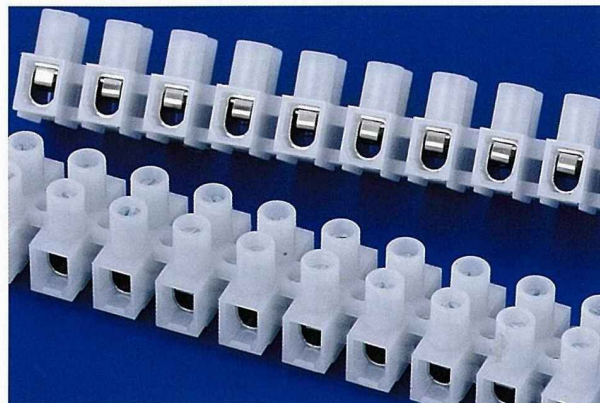

Ratings & Dimensions

Model	Wire Protector	Cross-Section	Wire Range (Cu, AWG)	Screw	Dimensions (mm/inches)							Packing
					Unit	A	B	C	D	E	F	
PA20DS	With	2.5 mm ²	#22-#12 Sol/Str	M2.6x5	mm	96.20	17.00	14.50	8.20	2.90	3.3±0.1	50 Pcs/Bag 500 Pcs/Ctn
					in.	3.787	0.669	0.571	0.323	0.114	0.130	
PA30DS	With	4 mm ²	#22-#12 Sol/Str	M3.0x6	mm	116.8	19.20	16.70	10.00	3.60	3.6±0.1	50 Pcs/Bag 500 Pcs/Ctn
					in.	4.598	0.756	0.657	0.394	0.142	0.142	

Patent : ZL20058417.5

Approvals

Model	Germany 	Finland 	China 	U.S.A.
PA20DS	450 V, 24 A, 2.5 mm ²	450 V, 24 A, 2.5 mm ²	450 V, 24 A, 2.5 mm ²	300 V, 20 A, #22-#12
PA30DS	450 V, 32 A, 4 mm ²	450 V, 32 A, 4 mm ²	450 V, 32 A, 4 mm ²	300 V, 25 A, #22-#10