
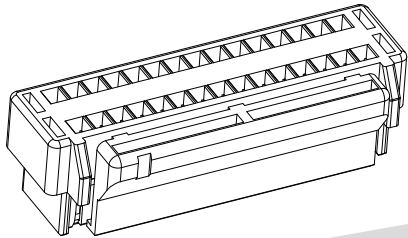


SPECIFICATIONS :
Voltage Rating: 150V AC / DC
Current Rating: 1A AC / DC
Withstanding Voltage: 500V AC/minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 500MΩ Min.
Contact Resistance: 30mΩ Max.

Material: Nylon66, UL94V-0

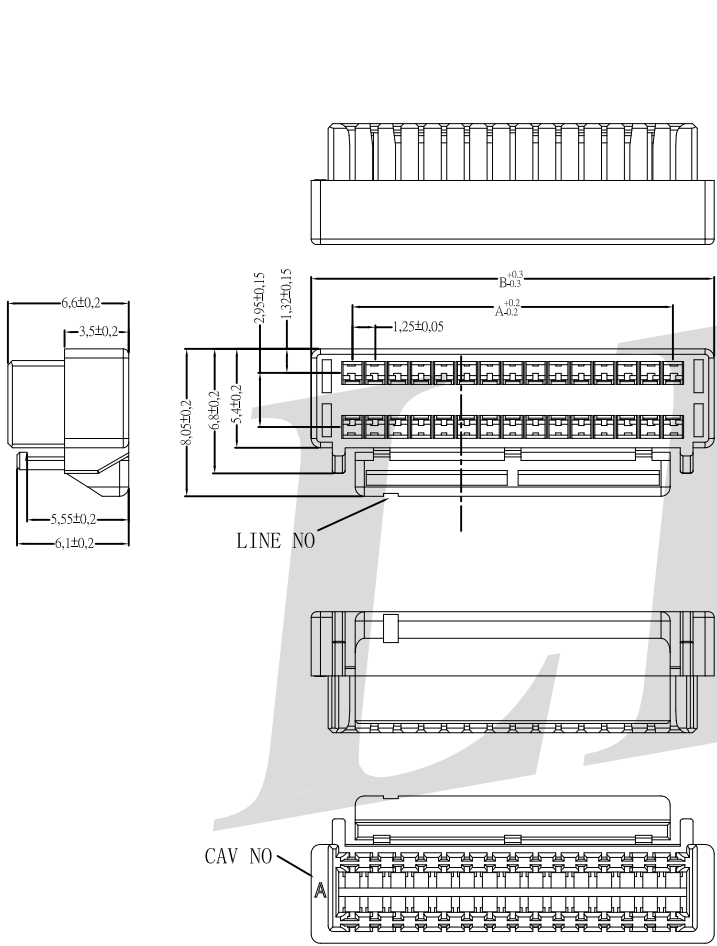


A1258 H - 2NP - N0 NA - A
① ② ③ ④ ⑤ ⑥

- ① Series No.
② Category: H-Male Housing,
③ Pin No.: 202-2*1PIN, ...240-2*20PIN
④ Material: N0-PA66,UL94V-0.
⑤ Color: NA-Natural,
⑥ Other Types:A-LDZY-8713

Ordering Information & Dimensions

Contacts	Dimensions(mm)	
	Dim A	Dim B
2x05	5.00	9.50
2x06	6.25	10.75
2x07	7.50	12.00
2x08	8.75	13.25
2x09	10.00	14.50
2x10	11.25	15.75
2x11	12.50	17.00
2x12	13.75	18.25
2x13	15.00	19.50
2x14	16.25	20.75
2x15	17.50	22.00
2x16	18.75	23.25
2x18	21.25	25.75
2x19	22.50	27.00
2x20	23.75	28.25

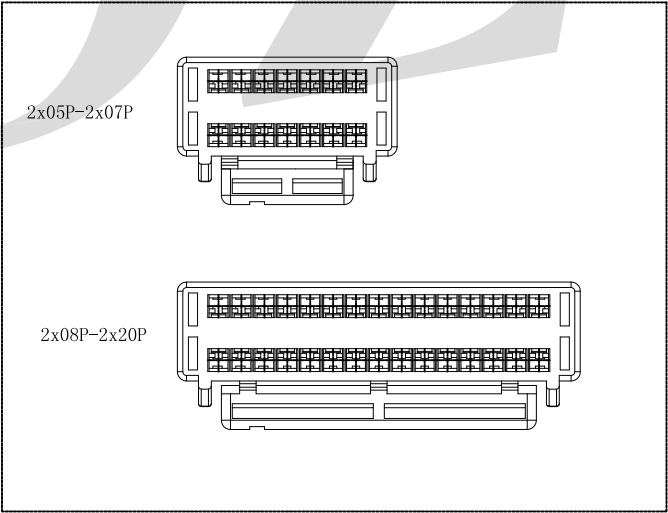

						一般公差 GENERAL TOLERANCE	LDZY[®] Electronics 东莞市蓝雁电子有限公司 DongGuan LDZY Electronics CO.,LTD.				料号 PART NO A1258H-2NP-N0NA-A			
						. X ±0.30					品名 TITLE			
						. XX ±0.20					1.25mm Crimp Style connectors			
						. XXX ±0.05								
						角法 PROJECT	核准 APPD	审核 CHK	绘图 DR	日期 DATA				
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD		周立鸿	兰 雄	潘昌文	2022/08/22	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER LDZY-8713	版次 REV A