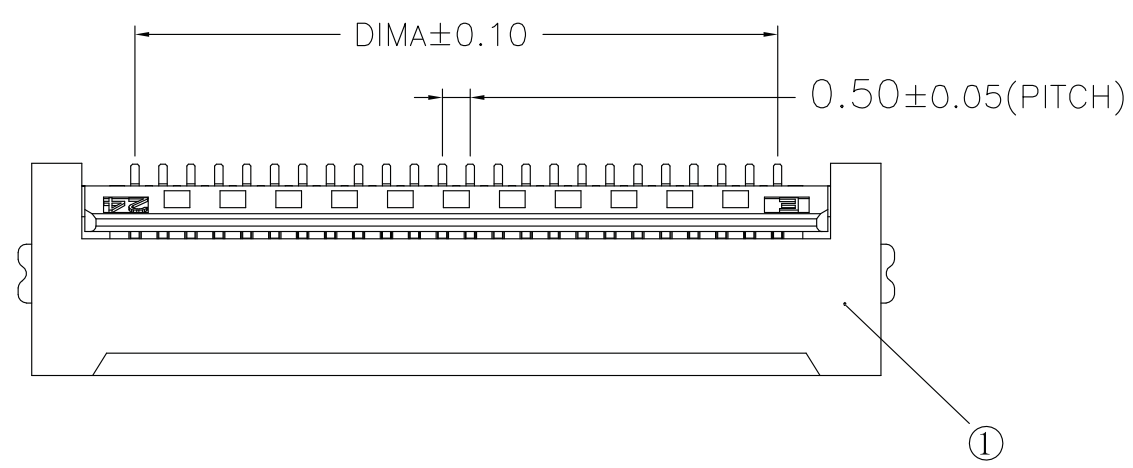

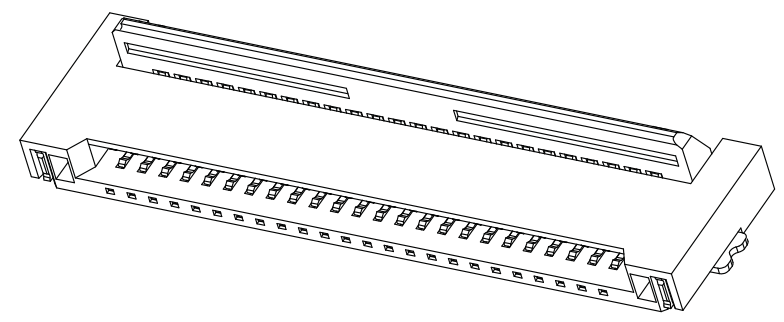

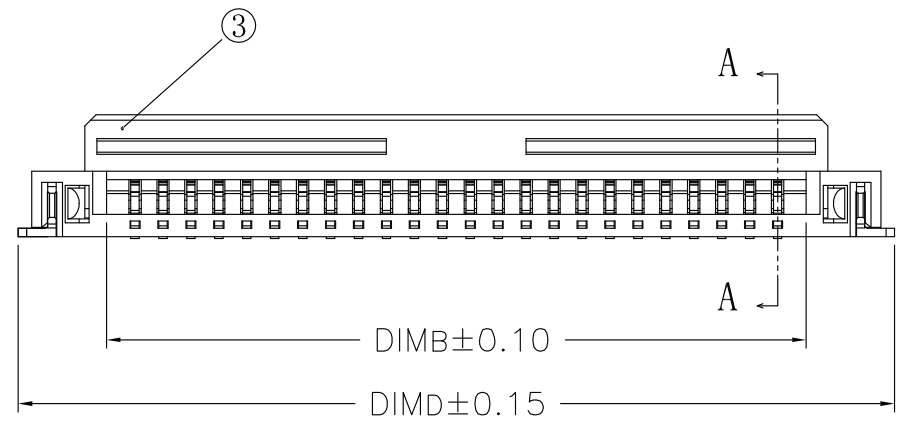





SECTION A-A

SPEC :

1. Housing: Hight-Temp Plastlc,UL94-V
   Color: Natural(Lvory)(LCP)
2. Locker: Hight-Temp Plastlc,UL94-V
   Color: Black(LCP)
3. Contact: Phosphor Bronze(C5191)
4. Solder Tab: BRASS(C2680)
5. Operating Voltage (Max): 50V AC
6. Current Rating (Max): 0.4A DC
7. Operating Temperature Range : -45℃ ~ +85℃

No. of contacts	Dimensions					No. of contacts	Dimensions				
	現有p數	A	B	C	D		現有p數	A	B	C	D
4		1.50	2.52	5.20	5.68	33		16.00	17.02	19.70	20.18
5		2.00	3.02	5.70	6.18	34	●	16.50	17.52	20.20	20.68
6	●	2.50	3.52	6.20	6.68	35		17.00	18.02	20.70	21.18
7		3.00	4.02	6.70	7.18	36		17.50	18.52	21.20	21.68
8	●	3.50	4.52	7.20	7.68	37		18.00	19.02	21.70	22.18
9		4.00	5.02	7.70	8.18	38		18.50	19.52	22.20	22.68
10	●	4.50	5.52	8.20	8.68	39		19.00	20.02	22.70	23.18
11		5.00	6.02	8.70	9.18	40	●	19.50	20.52	23.20	23.68
12	●	5.50	6.52	9.20	9.68	41		20.00	21.02	23.70	24.18
13		6.00	7.02	9.70	10.18	42		20.50	21.52	24.20	24.68
14		6.50	7.52	10.20	10.68	43		21.00	22.02	24.70	25.18
15		7.00	8.02	10.70	11.18	44		21.50	22.52	25.20	25.68
16		7.50	8.52	11.20	11.68	45	●	22.00	23.02	25.70	26.18
17		8.00	9.02	11.70	12.18	46		22.50	23.52	26.20	26.68
18		8.50	9.52	12.20	12.68	47		23.00	24.02	26.70	27.18
19		9.00	10.02	12.70	13.18	48		23.50	24.52	27.20	27.68
20		9.50	10.52	13.20	13.68	49		24.00	25.02	27.70	28.18
21		10.00	11.02	13.70	14.18	50	●	24.50	25.52	28.20	28.68
22		10.50	11.52	14.20	14.68	51		25.00	26.02	28.70	29.18
23		11.00	12.02	14.70	15.18	52		25.50	26.52	29.20	29.68
24	●	11.50	12.52	15.20	15.68	53		26.00	27.02	29.70	30.18
25		12.00	13.02	15.70	16.18	54		26.50	27.52	30.20	30.68
26	●	12.50	13.52	16.20	16.68	55		27.00	28.02	30.70	31.18
27		13.00	14.02	16.70	17.18	56		27.50	28.52	31.20	31.68
28		13.50	14.52	17.20	17.68	57		28.00	29.02	31.70	32.18
29		14.00	15.02	17.70	18.18	58		28.50	29.52	32.20	32.68
30	●	14.50	15.52	18.20	18.68	59		29.00	30.02	32.70	33.18
31		15.00	16.02	18.70	19.18	60		29.50	30.52	33.20	33.68
32	●	15.50	16.52	19.20	19.68						

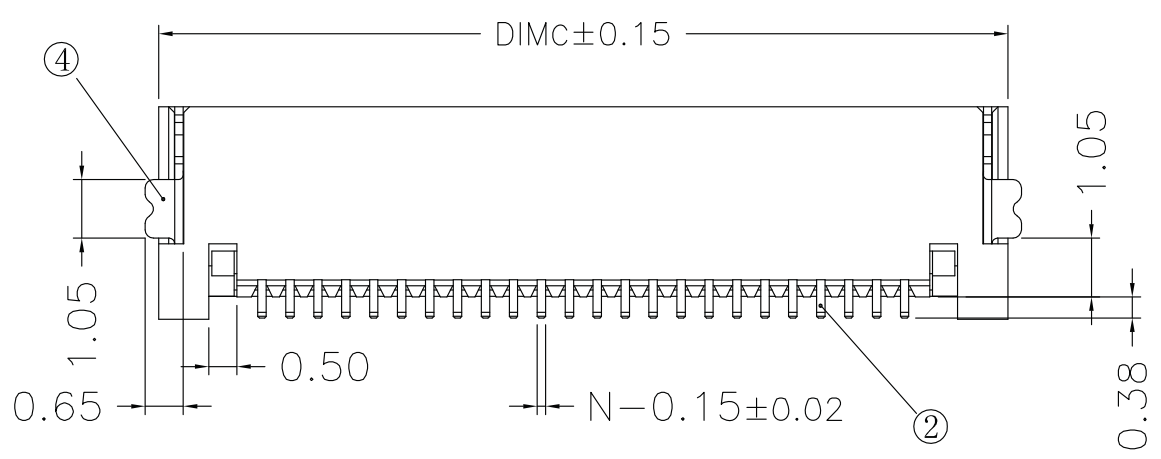

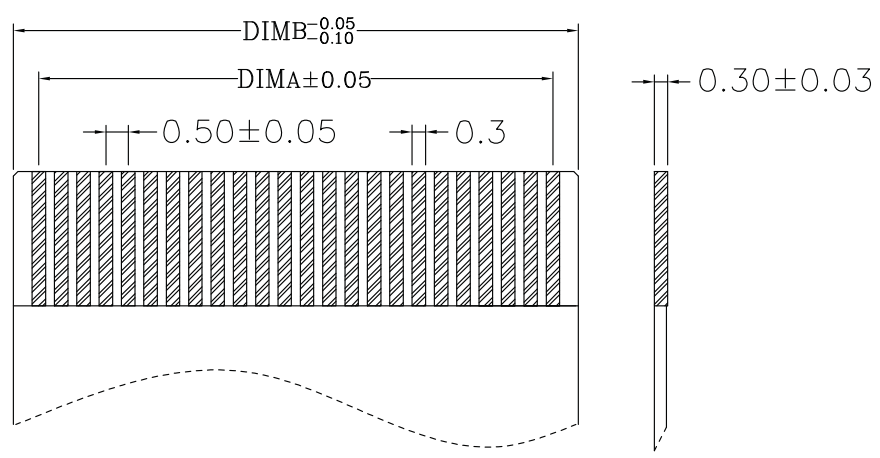

FFC Cable

适用线路板

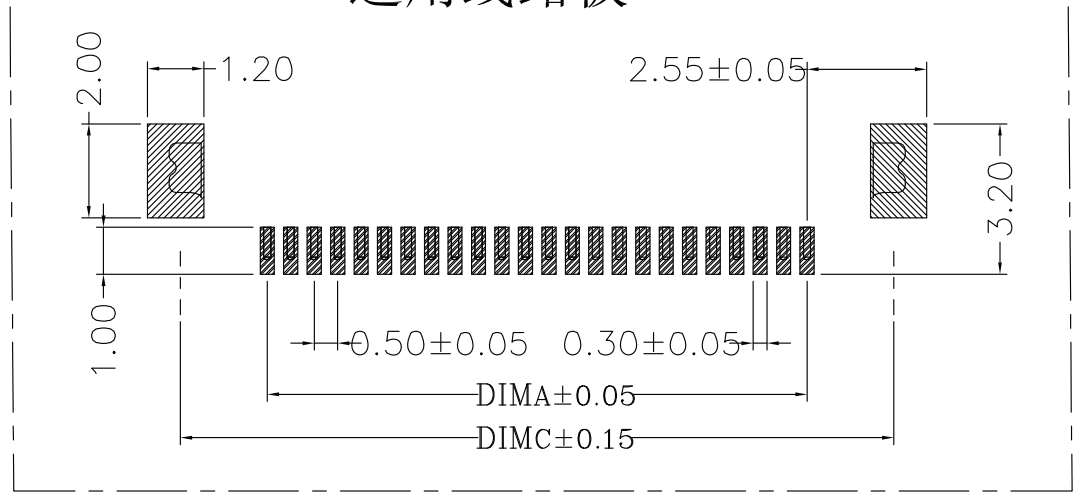

Item	Product name	Material
①	Ontology (H1.2)	LCP UL94V-0 Natural Color
②	Terminal (H1.2)	Phosphor bronze/Tin-plate or Gold
③	Cover (H1.2)	LCP UL94V-0 Black
④	Soldering pad (H1.2)	Brass/Tin-plate

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.30 .XX ± 0.20 .XXX ± 0.10 ANG ±
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION

FPV-WRD12GF3-xx-LF

- SERIES
- 90°SMT ROTARY ZIF
- HIGH 1.2mm
- DUAL CONTACTS
- GOLD
- CABLE t=0.3mm
- 04W~60WAY
- LEADFREE

DESCRIPTION: 0.5PH 1.2H 掀蓋臥貼背插鍍金