
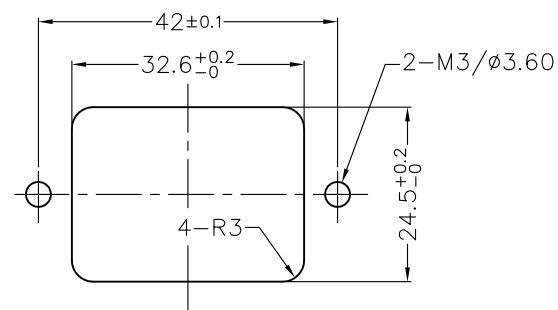
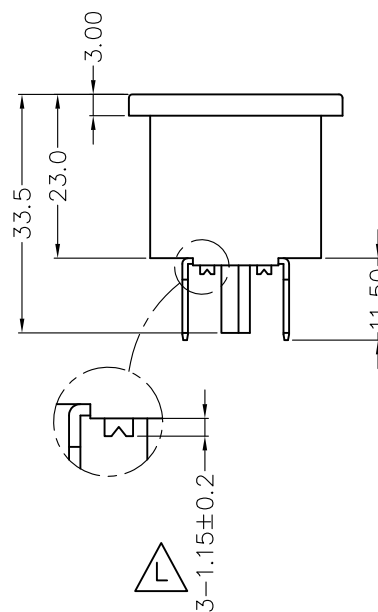
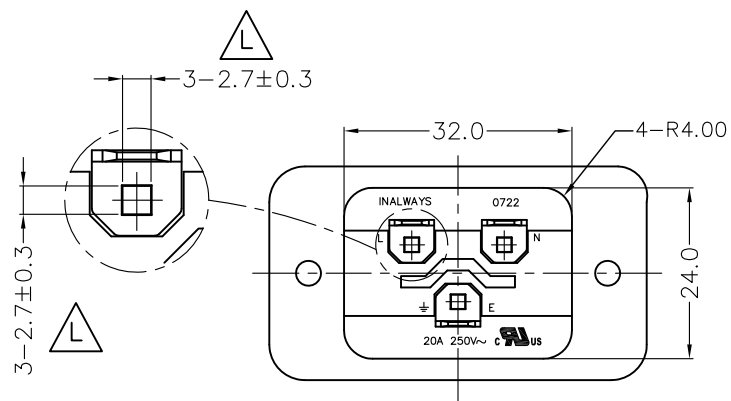
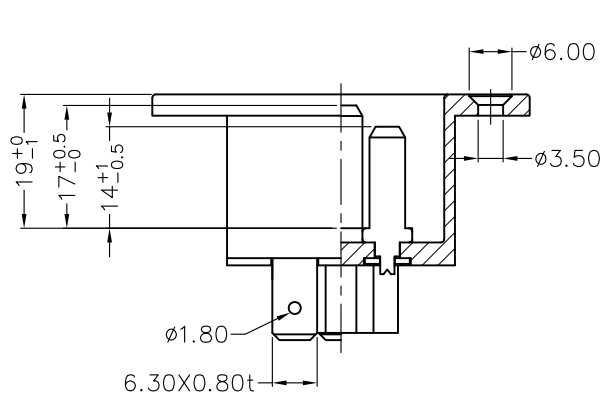


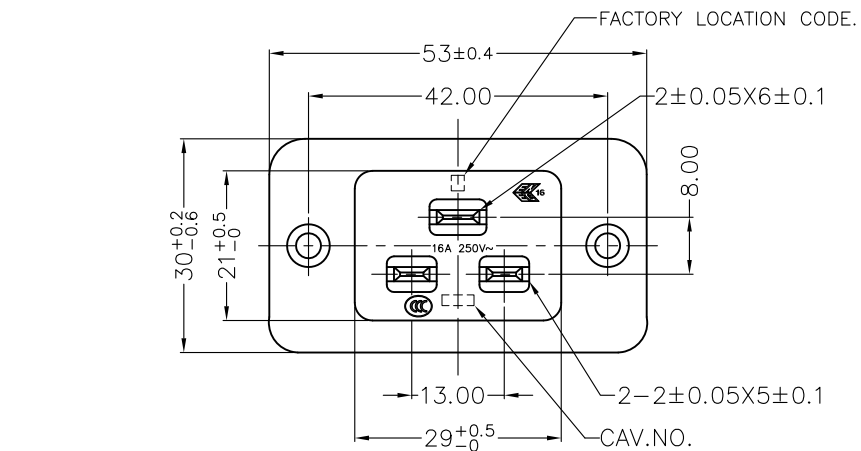

PANEL CUT-OUT

SPECIFICATION

- A: MATERIAL:
 1. HOUSING: PBT WITH GLASS FIBER UL 94V-0
 2. TERMINAL: COPPER ALLOY, TIN PLATED
- B: CHARACTERISTICS:
 1. RATING: 16A 250V ~ EUROPE
 20A 250V ~ NORTH AMERICA
 2. INSULATION RESISTANCE: OVER $100M\Omega$ 500VDC
 3. ELECTRIC STRENGTH: 2000V AC ONE MINUTE
- C: APPROVALS:
 UL, CUL, ENEC & CCC

M	2022.11.03	DGR22007	增加UL标识
L	2021.08.20	DGR21005	更改安规刻字&增加铆花公差
K	2011.12.07	DGR11028	CHANGE SAFETY MARK
J	2009.06.09	DGR09015	CHANGE MARK
I	08-17-06	DGR06066	DIM CHANGED
REV	DATE	DOCUMENT	DESCRIPTION

 深圳易凯达科技有限公司 WIN-KARE TECHNOLOGY CO.,LTD.				PART NO.: 0722-CW		NAME: AC INLET 3P SOCKET (SCREW-ON)	
TOLERANCE UNLESS OTHERWISE MARKED DIMENSION: .000 : ± 0.1 .00 : ± 0.2 .0 : ± 0.3				MATERIAL: SEE ABOVE		SPEC.: IEC 60320-1 C20	
 UNIT mm				APPROVED	CHECKED	DESIGNER	NOTE:
SCALE 1 : 1				DOC.#: S722-0001			
SHEET 1 of 1							