


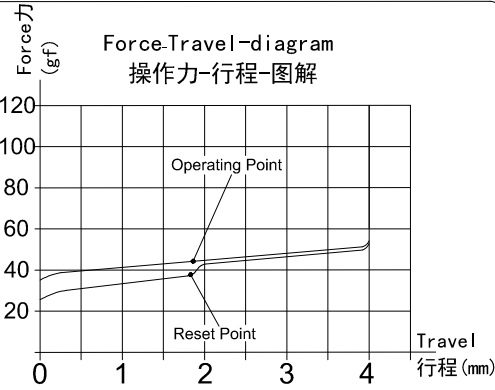







ABIDE BY WEEE & ROHS




■ Specification :

- 1. Rating: 12 VAC/DC max. 2 VDC min.
10mA AC/DC max. 10 μ A DC min.
 - 2. Contact Resistance: 200m Ω Max
 - 3. Insulation Resistance: 100M Ω Min. (DC100V)
 - 4. Withstand Voltage: AC100V(50-60Hz) for 1 minute
 - 5. Operation Force: 45 $\pm$ 10gf
 - 6. Conduction travel: 1.7 $\pm$ 0.4mm
 - 7. Total travel: 4.0 $\pm$ 0.3mm
 - 8. Electrical Life: 50,000,000 Cycles(min).
 - 9. Degree of protection: IP54(excluding the terminals)
- <Feel is allowed to have difference before and after life test>

■ 电路图

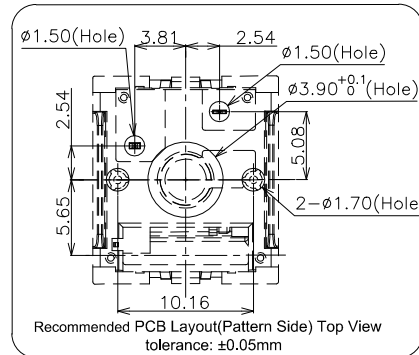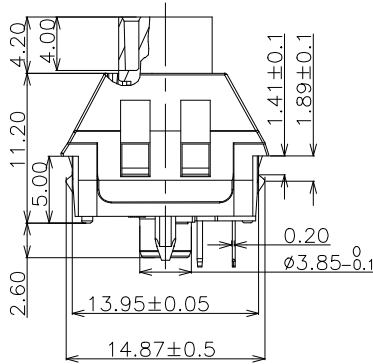

■ 轴倾斜角度



⑨	Base	—	1	POM	Yellow	—
⑧	Slider	—	1	POM	Green	—
⑦	Protecting Cover	—	1	Nylon	Nature	—
⑥	Spring	—	1	Stainless Steel	Nature	—
⑤	Contact	—	2	Composite gold	—	—
④	Cover	—	1	POM	Yellow	—
③	Keystroke	—	1	POM	Yellow	—
②	Static Plate	—	1	Copper Alloy	Nature	—
①	Movable Plate	—	1	Copper Alloy	Nature	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		 东莞市凯华电子有限公司 KAIHUA ELECTRONICS CO., LTD	
DRAWN		HuHaixin	2022. 06. 25			
CHECKED					TITLE:	PG1511F Keystroke Switch
APPROVALS					PART NO:	CPG1511F01S138
TOLERANCES ARE			30<L	±0.30	ANGLE	UNIT: mm
			10<L≤30	±0.20		
			5<L≤10	±0.15		
			L≤5	±0.10		
			±2°	DRAWING NO.	KHA-PG1511F-167EN	SHEET: 10F1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			