


APPROVED BY:

Ver	Date	Modify Contents
V02	2018-7-3	更改背面喷码
V03	2018-8-11	增加背面双面胶
V04	2018-11-28	增加易撕贴
V05	2018-12-24	去掉背光背面双面胶
V06	2022-6-18	更改挡墙, 更改易撕贴位置

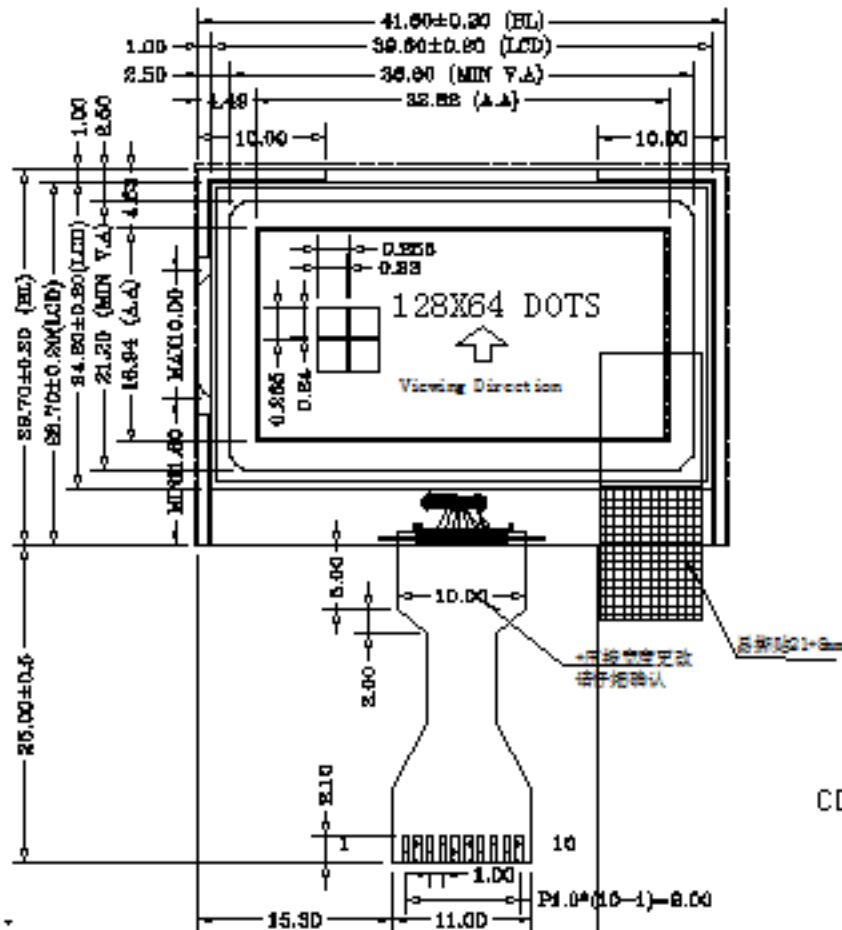


NOTE:

1. GENERAL TOLERANCE: $\pm 0.2\text{mm}$
2. THE PART OF *ARE THE KEY DIMENSION TO CONTROL

LCD TYPE	FSTN	BACKLIGHT COLOR	WHITE
POLARIZER TYPE	TRANSMISSIVE	FRAME TYPE	-----
DISPLAY TYPE	POSITIVE	DATA TRANSFER	4SPI
LCD COLOR	-----	CONNECTOR TYPE	FPC
VIEWING ANGLE	6:00	TECHNOLOGY	COG
OPERATING TEMP	-30°C ~ +80°C	DC-DC IC	-----
STORAGE TEMP	-30°C ~ +80°C	LCD DUTY	1/65
BACKLIGHT TYPE	-----	LCD BIAS	1/9
CONTROLLER IC	ST7567-G4D-1		ROHS
REMARKS	VDD=3.3V, V _{CO} =9.0V; V _{LED} =3.3V@IF=45mA		

发至: ■开发 ■COG质量 ■COB质量 ■生管 ■销售 ■FAE ■LCD贴片 ■IQC

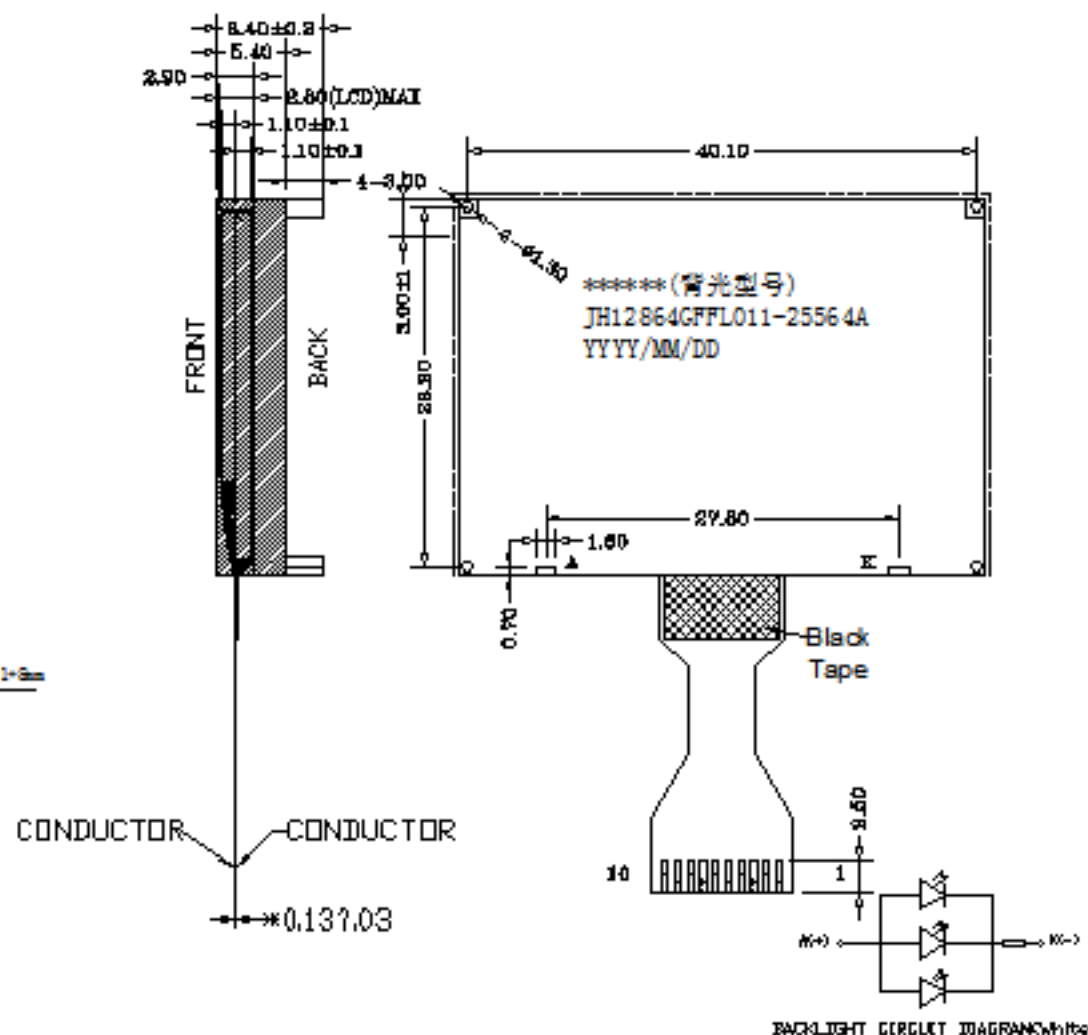

PIN ASSIGNMENT

No	Symbol
1	VC
2	I/O
3	VO
4	VSS
5	VDD
6	EDA
7	SRK
8	AO
9	RST
10	CS



安徽鑫视界光电科技有限公司

GOLDEN-VISION CORPORATION SPECIFICATION.

TEL: (0559) 2629135

FAX: (950) 752-2666

PRODUCT NO.	GVH12864GFFL011-25564A(LCM)				
CUSTOMER NO.					
DRAWN BY	CQ 2022.6.18	SCALE	1:1	REV.	V06
CHECKED BY		PAGE	1/1		
APPROVED BY		UNIT	mm		