
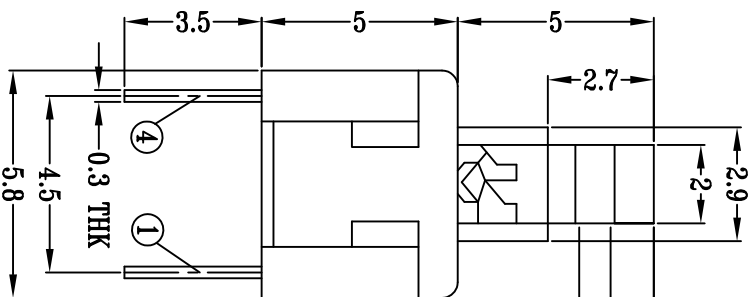


SCHEMATIC (NON SHORTING)

P.C.B. LAYOUT

TOP VIEW

SPECIFICATIONS (FOR REFERENCE ONLY)			
RATING	: DC 30V 0.5A		
CONTACT RESISTANCE	: 70m ohm		
INSULATION RESISTANCE	: 100M ohm at 500V DC		
WITHSTAND VOLTAGE	: AC 500V for 1min		
LIFE	: 10,000 cycles		
OPERATING FORCE	150±50gf	250±100gf	350±100gf

8					TOLERANCE					
7					UNLESS SPECIFIED					
6					WITHIN 1.5mm : ±0.1mm			22-May-2013		Tony
5	CAM STICK	STEEL WIRE	1	NATURAL	OVER 1.5mm : ±0.2mm	ISSUE	DATE		DESCRIPTIONS OF REVISION	APPD.
4	SPRING	STEEL WIRE	1	NATURAL	TITLE : PUSH SWITCH		UNIT : mm	DRWG NO.: SR-DR-PB22E60-7002		
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED OVER Ni PLATED	MODEL: PB-22E60		SCALE: 5:1	DWN.	Dragon	22-May-2013
2	COVER	POM	1	BLACK				CHK'D	Fayen	22-May-2013
1	KNOB	POM/PBS C5210R-EH	1	WHITE/Ag CLAD				APPD.	Tony	22-May-2013
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONGGUAN SOAR ELECTRONIC CO.,LTD					