






PB32

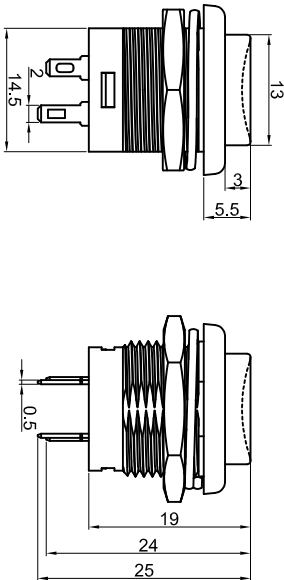

Switch Specifications
Rating: 3A 250VAC/125VAC ;
3A 30VDC
Contact Resistance: 50mΩ Max. ;
Dielectric Strength:2000VAC For 1 minute ;
Total Travel: 3± 0.5mm ;
Operating Force:450± 150gf ;
Mechanical Life:50,000 cycles ;
Load Life:10,000 cycles ;
Operating Temperature:-20° C~70° C ;
Function: OFF-(ON)

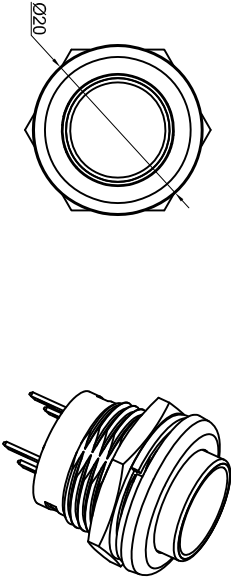

Panel Thickness: 5mm MAX.



LED Specifications

RF

(ON)

R

4

LED Specifications

LED 类型	双向LED灯珠（交直流通用）									
寿命	40000小时（参考值）									
额定电压	DC3V	DC6V	DC24V	DC36V	AC110V					
额定电流	DC12V				AC220V					
降压方式	LED内集成电阻					LED内集成电阻				

W1	白色	6.0	7.5	9.5	15
U1	蓝色	6.0	7.5	9.5	15
G1	纯绿色	6.0	7.0	8.5	15
Y1	黄色	6.0	7.0	8.5	15
R1	红色	6.0	7.0	8.5	15
W	白色	3.0	3.2	3.4	15
U	蓝色	3.0	3.2	3.4	15
G	纯绿色	3.0	3.2	3.4	15
Y	黄色	1.8	2.0	2.4	15
R	红色	1.8	2.0	2.4	15
X	最小	一般	最大	额定	
Emitted color	顺向电压(V)				电流(mA)