
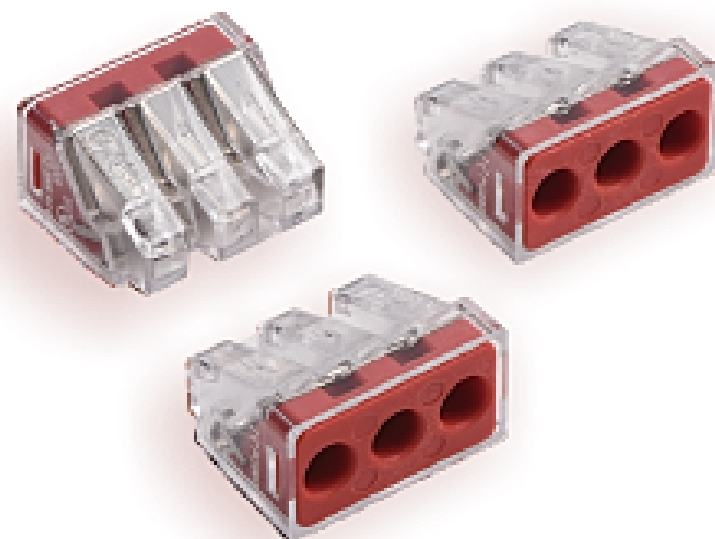


Push-In Wire Connector, 6 mm²

- Polycarbonate and polyamide 66, UL 94V-0 flame-retardant shell rated at T85 (IEC).
- Spring force connector constructed from copper plate and stainless spring steel.
- Accept solid and stranded wires up to 6 mm².
- Compact size design is perfect for tight spaces.
- Clear shell offers visual verification of connection.
- Recommend reusing with a wire at least one size larger than the wire previously removed.
- Certified to IEC/EN 60998.



Dimensions (mm)	Cat. No.	Color	Poles	Electrical Ratings & Wire Range	Approvals	Packing
	PC863	Red	3	41A, 450V, T85°C 2,5-6 mm ² , Rigid/Flexible	   	Box of 50 Carton of 2,500 (10 bags, 250 ea.)