

TSP-3 Touchscreen Keypad

Easy and Secure Access at Your Fingertips



7" Touchscreen




2 Megapixel Camera




Climax's TSP-3 is a Touchscreen keypad. Featuring a 7" full-colour, high-resolution touchscreen, TSP-3 provides quick and secure access to arm/disarm/home arm the system and an intuitive way to operate the security system. Connected to the control panel via Wi-Fi network, TSP-3 displays an overview of the system with its intuitive graphic user interface.

By gaining control over security and home automation sensors in the system, TSP-3 enhances convenience and comfort level of living. Built-in 2 megapixel front camera is able to take photos, providing with the basis for algorithm analysis to detect and prevent potential harms. With adjustable privacy shutter in front of the camera, TSP-3 offers another layer of peace of mind for users.


In addition, TSP-3 can be wall-mounted or placed on the table with its stand. With its flexibility of installation and the capabilities of security and home automation control, TSP-3 provides an effortless way for users to gain access control, as well as an easier, smarter way of living.

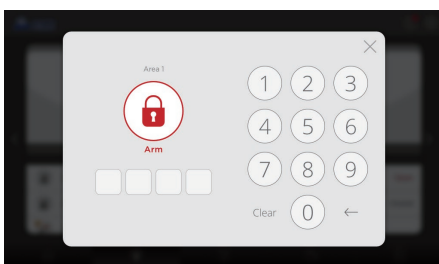

Access control

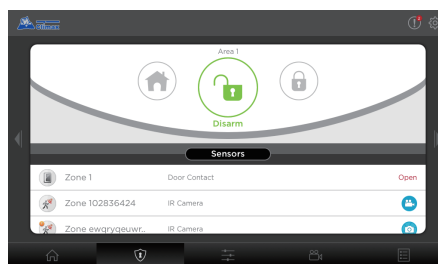

Intuitive user interface

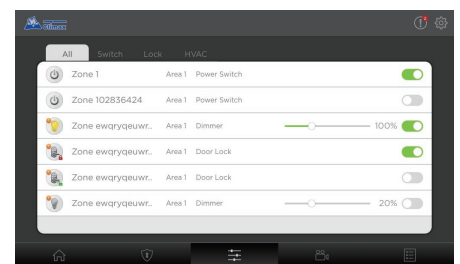

Home automation control

TSP-3 Touchscreen Keypad

Features

- 7" high resolution color graphic touchscreen to control devices in the system
- User-friendly and intuitive interface
- Built-in 2 megapixel camera
- Adjustable privacy shutter
- Home automation capabilities
- Suitable for residential and commercial premises
- Flexible installation options of wall mounting or desktop deployment
- Half-duplex communication
- Take photos for algorithm analysis to detect and prevent potential harms
- Compatibility with Climax's video doorphone for live video verification (available soon)

Specifications

Display	7" LCD
Wi-Fi	802.11 b/g/n 2.4GHz
Power Source	5V/1.5A, USB adapter
Backup Battery	3.7V 2500mAh Lithium-ion polymer battery
Backup Battery Life	4 hours*
Camera	2 megapixel camera
Audio	Built-in microphone and speaker
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	195 mm x 114 mm x 17 mm

**Note: Actual battery life may vary with product settings, operating environment and usage.*