



# Video conference Controller Keyboard CKB-S1IP



## Application

CKB-S1 The video conferencing keyboard can be used in various important conference venues, such as government and telecommunications departments, public security, procuratorates, courts, banks, securities, insurance, education, taxation, etc. Easy use to control video conference ptz camera


## Product Overview

The CKB-S1 keyboard adopts the new design of CNC aluminum panel fine sand oxidation upper shell and PC+ABS bottom shell, which has strong maneuverability and effectively solves the problem that the current web operation video conference camera is inconvenient. The high-end atmosphere, unique surface oxidation treatment, the appearance is simple and beautiful; the industrial-grade LCD screen module has excellent display effect and the characters are delicate and clear. It supports VISCA and ONVIF protocols, and the VISCA is fully compatible and extensible. The built-in web server makes the configuration interface simple and clear, and it is easy to operate. A few steps to achieve perfect control of the video conference camera.

## Features

- ※ Support IP version and Analog version at same time.
- ※ Support full VISCA, ONVIF, PELCO-P, PELCO-D protocol.
- ※ Support control the software function of the conference camera.
- ※ Support 4D joystick control ptz function.
- ※ Seesaw switch control zoom speed.
- ※ Support IE web setting and POE.
- ※ Support 7 buttons for CAM1 to CAM7 ,fast switch easily.

## Product Dimension(mm)

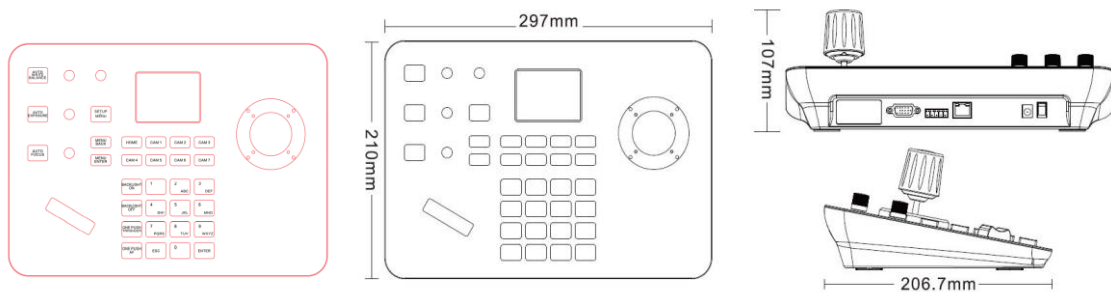

## Technical Specification

<b>Model No.</b>	<b>CKB-U2IP</b>
<b>chip</b>	His3536DV100
<b>system</b>	Linux
<b>protocol</b>	Full VISCA、PELCO-D/P、ONVIF
<b>Output</b>	RS422, RS232, RJ45
<b>accessories</b>	Seesaw switch, knob , mechanical button, 4D joystick
<b>Beep</b>	On/off
<b>screen</b>	TFT LCD 320*240
<b>Power consumption</b>	≤5W
<b>power</b>	DC12V-2A
<b>Work temperature</b>	-10℃~55℃ / 14°F~131°F
<b>Work humidity</b>	20%~80% frostless
<b>Storage temperature</b>	-10℃~60℃ / 14°F~140°F
<b>Storage humidity</b>	0~90% frostless
<b>Packing size</b>	340*268*140mm
<b>Outer box size and specifications</b>	553*460*350mm / 6 sets
<b>weight</b>	1.9KG

※※※ Product specification are subject to change without notice ※※※