

SWITCH / SLIDE SW


SS-1, SS-2 Series Mini-slide Switches with Hundreds of Options for Low-cost Solutions, Single or Double Poles

Wide variety of slide switch selections for various industry applications

Low cost and compact sized

Different knobs, pitches and housing, consult us for detailed specification

Non-shorting of shorting circuitry

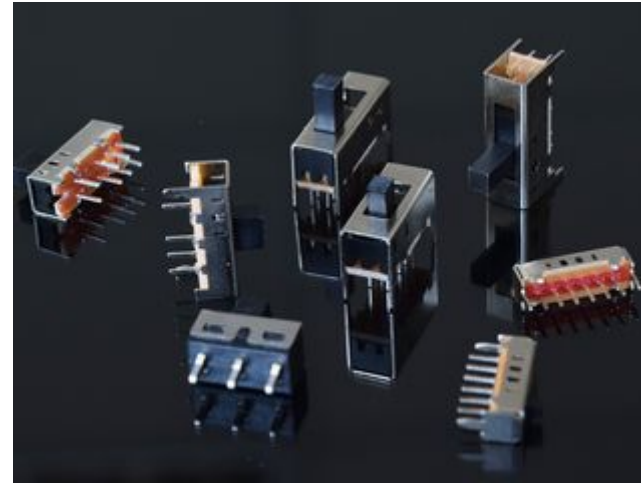[PDF Download](#)[Get Information](#) ZOOM IN

Feature

- Rating: 0.3A/0.5A, 50VDC
- Contact resistance: 100mΩ(max.) initial
- Insulation resistance: 100MΩ (min) at 500VDC
- Dielectric strength : 500VAC for 1 minute
- Electrical life: 10,000 cycles
- Function: 1 ~ 2 pole, 2~5 throw multi-circuitry
- Cover : Nickel plated steel
- Knob: PA66
- Base : Phenolic Laminate
- PCB terminal: Silver plated brass
- Contact: PBS strip

Specification


[How to order](#)




<u>SS</u> -	<u>2</u> I	<u>3</u> I	<u>E</u> I	<u>XX</u> I	<u>G</u> I	<u>3</u> I
Pole	Function	Travel (mm)	Body or Knob	Knob	Knob height	
1- 1 Pole	2 ON-ON	D 2.0	Consult us for various options including shorting, nonshorting, pitch..etc	G	2 2mm	
2- 2 Poles	3 ON-ON-ON	E 2.5			3 3mm	
	4 ON-ON-ON-ON	F 3.0			4 4mm	
	5 ON-ON-ON-ON-ON	G 3.5			5 5mm	
		H 4.0		VG	6 6mm	
		J 5.0			7 7mm	
					8 8mm	
					9 9mm	
					10 10mm	


Item





SS-12D101G5

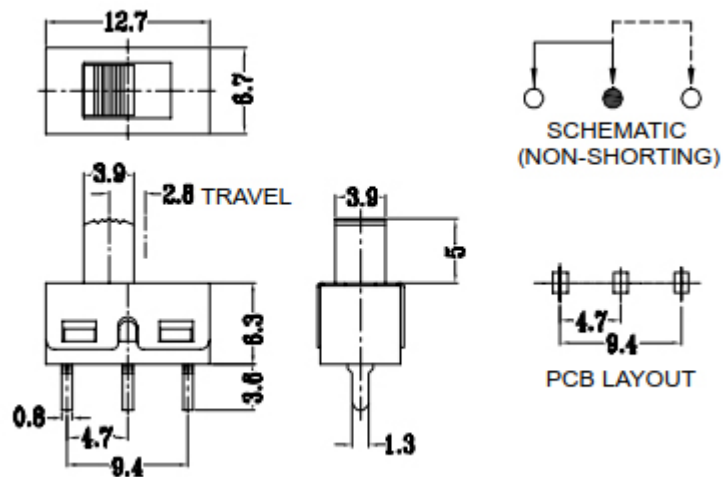

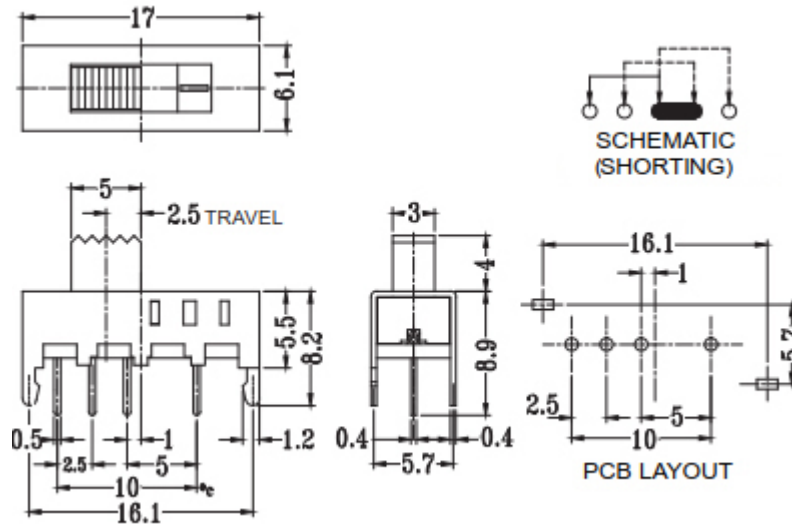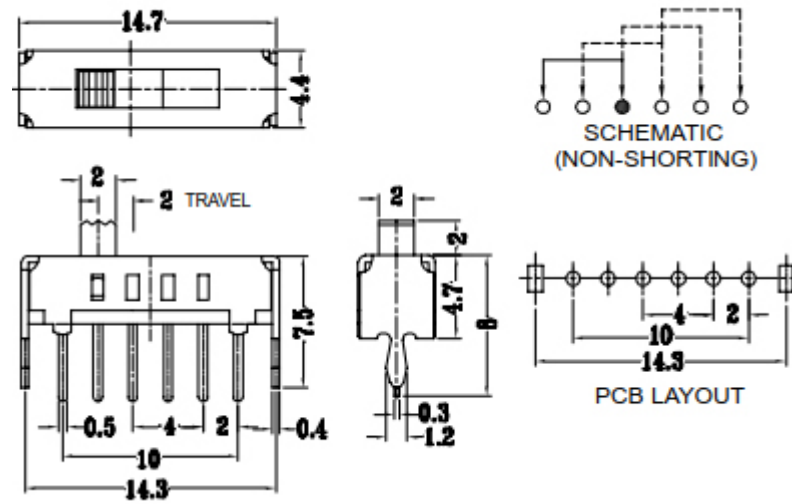
SS-13E05G4SS-14D01G2



SS-23D03G4

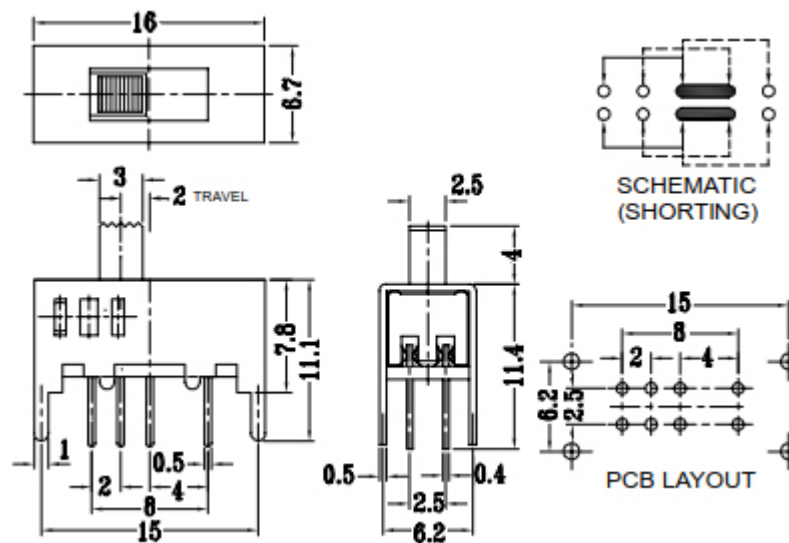


SS-23E06G5

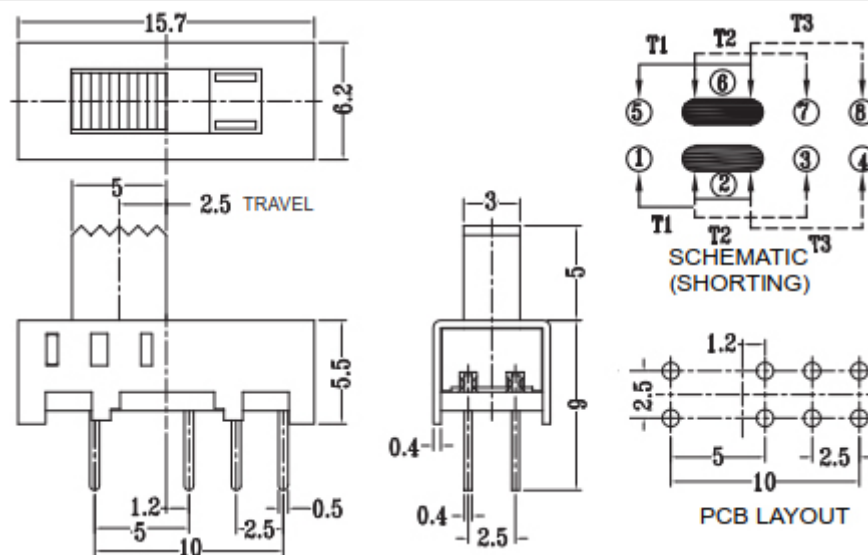



SS-25D01G7

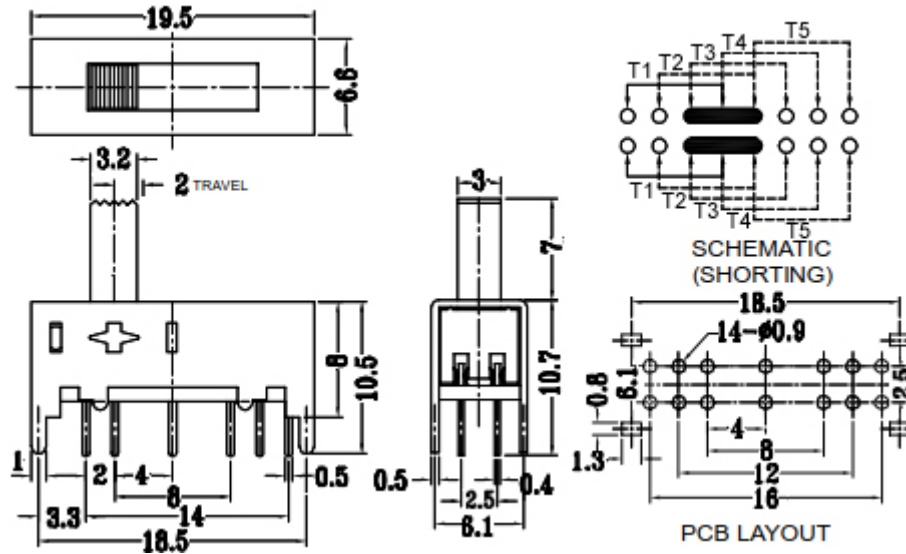

 Start Print

Canal Components Inc. Tel:+886-2-29161263 Fax:+886-2-29117574
Copyright ©2009 Canal Components Inc.. All rights reserved.