


CY 2(DM) Series Dipped Silver Mica Capacitor

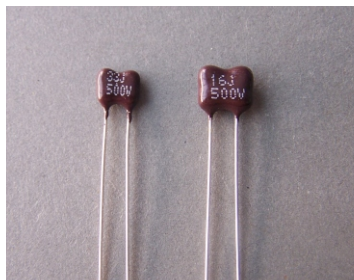

Features

- Small Size
- Low loss and high stability
- Wide range of operating Tem.
- Meet MIL-C-5

CY2 Series Dipped Mica Capacitors have been designed to meet the exacting physical, electrical and environmental requirements of MIL-C-5. New levels of reliability, ruggedness, and electrical excellence have resulted in their wholesale adoption and used by the electronics industry for both military and commercial applications

Key Performance Characteristics

Standard Capacitance Range : 1 to 10,000 pF
 Capacitance Tolerance: +/-1%; +/-2%; +/-5%
 Voltage Rating : 100V to 1000V
 Operating Temperature: -55 to +85 degree C
 Insulation Resistance (Min.): 1×10^9

** High Frequency Type is available if requested*


How to Order

CY2 - 100V - D - 470PF - I

① ② ③ ④ ⑤

- ① Model
- ② Working Voltage
- ③ Temperature Coefficient Group
- ④ Nominal Capacitance
- ⑤ Capacitance Tolerance:

Dimension



Model	Work Voltage (V)	Capacitance Range (PF)	Size(mm)						
			Lmax	Bmax	Cmax	Rmax	A 1	d 0.1	LLmin
CY2-0	100	10~220	6.9	6.4	4.4	2	3.1	0.45	31.75
	250	1~68							
CY2-1A	100	10~750	10	9.7	5.6	2	3.6	0.45	31.75
	250	10~330							
	500	1~200							
CY2-2A	100	10~2000	12.5	10.7	6.1	2	6.0	0.6	31.75
	250	10~1500							
	500	1~1000							
CY2-3A	100	100~8200	18.1	15.0	9.4	3.2	8.8	0.8	31.75
	250	100~6800							
	500	100~5100							
	1000	100~2500							
CY2-1	100	10~1000	9.0	8.0	5.0	2	6.0	0.6	20.0
CY2-2	100	1100~2400	12.0	8.5	6.0	2	8.0	0.6	20.0
CY2-3	100	2700~10000	17.0	12.5	7.0	3	12.5	0.8	20.0