
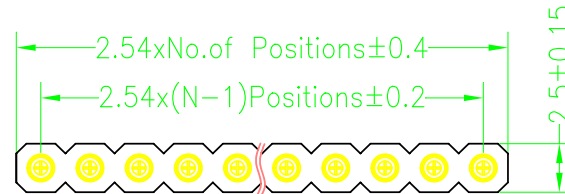


Technical Data

Insulator:Black glass filled polyester PPS or PBT
Flammability:UL 94V-0
Sleeve:Brass
Contact clip(4 finger):Beryllium copper
Mating pin:Ø0.40 to Ø0.56mm
Forces:(polished steel gauge Ø0.43)
Mechanical life:min 500 cycles
Current rating:3Amps/Contact max
Contact resistance:max 10mΩ
Dielectric strength:min 1000VRMS
Operating temperature:-55℃to+105℃
Soldering temperature:+245℃±5℃, 5s max

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

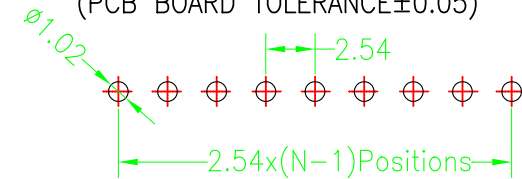

Ordering Information

3620-19 X XX XX S 048 X 1



Insulator Type
Code
1:Single row
2:Double row

No.of Pins
1x40Pins
2x40Pins

Connector Type
G0=Gold Flash
S0=Gold Flash/Tin
S3=10u" Gold/Tin
S4=15u" Gold/Tin
S5=30u" Gold/Tin

Pin Length
048=4.82

Packing
A=Tray
T=Tube

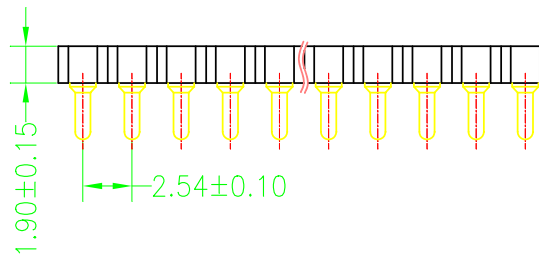

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

YiYuSheng

12.03.28

CHECK

APPROVE

SCALE

FIT

UNIT

SIZE

SHEET

PROJ.

12.03.28

YiYuSheng

12.03.28

CHECK

APPROVE

SCALE

FIT

UNIT

SIZE

SHEET

PROJ.

JiLN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 3620-19XXXXXS048X1

TITLE: 2.54x1.9圆孔排母 SIP L=4.82