

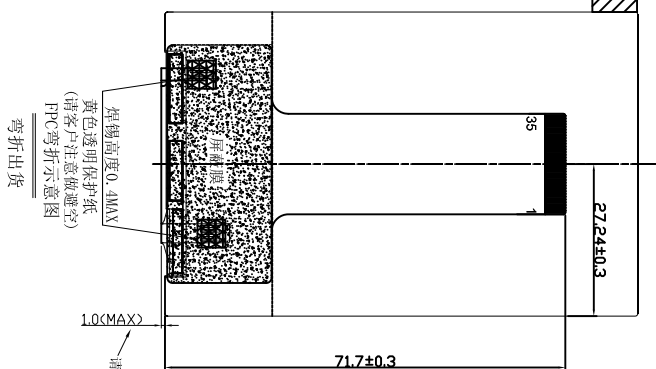


注：标注 请重点确认

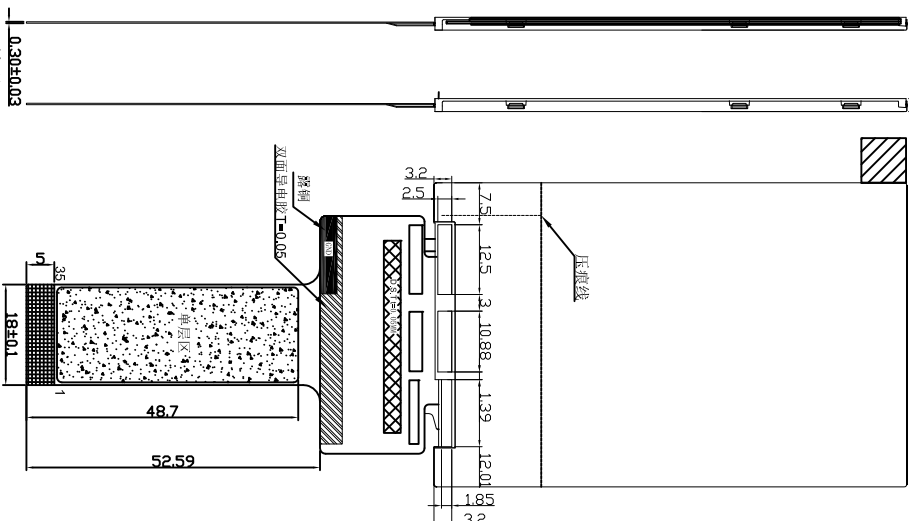


(不含FPC厚度及FPC焊接高度)

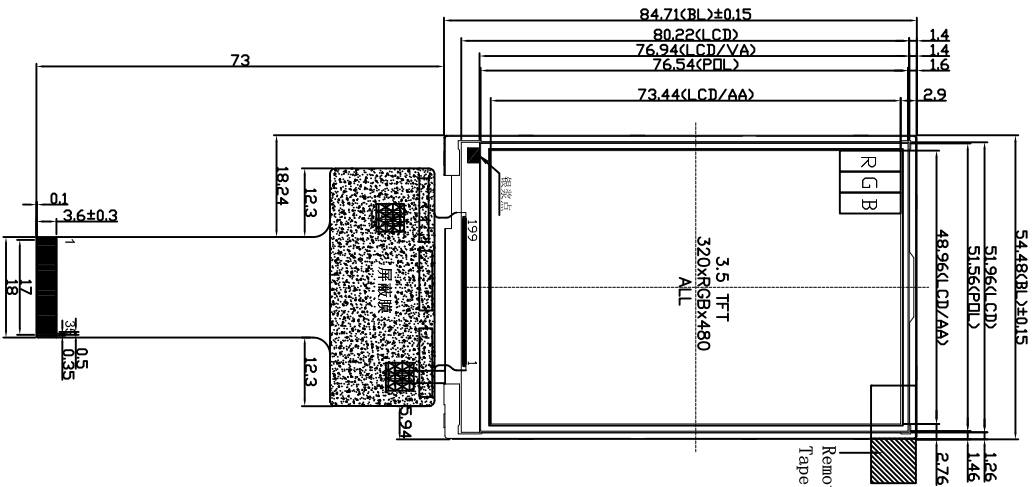

No.	Signal
1	GND
2	LED+
3	LED-
4	GND
5	VCC
6	IOVCC
7	RESET
8	GND
9	GND
10	DB15
11	DB14
12	DB13
13	DB12
14	DB11
15	DB10
16	DB9
17	DB8
18	DB7
19	DB6
20	DB5
21	DB4
22	DB3
23	DB2
24	DB1
25	DB0
26	GND
27	RDX
28	WRX
29	RS
30	CS
31	GND
32	XR
33	Y0
34	XL
35	YU

FPC+P1补强
T=0.3±0.03

型号：RH12-35S-0.5SH



BACKLIGHT CIRCUIT

- NOTES:
1. POL: E.0. 17/F.0. 17
 2. DISPLAY TYPE: 群创 3.5" TFT
 3. MAIN LCD DRIVER IC: ST7796S
 4. OPTIMUM VIEWING ANGLE: ALL
 5. LUMINANCE: 250MIN CD/M2 300TYP CD/M2
 6. OPERATING TEMP: -20° C~70° C; STORAGE TEMP: -30° C~80° C
 7. GENERAL TOLERANCE: ±0.2MM
 8. MARK "*" IS THE IMPORTANT DIMENSION
 9. 建议客户以LCD的AA区尺寸外扩0.3mm开镜片窗

Newvision Technology				
产品型号	H35J3501	公差	±0.1	2019. 7. 16
客户项目				