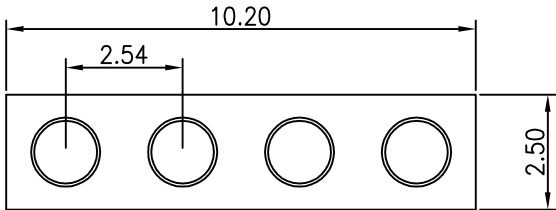
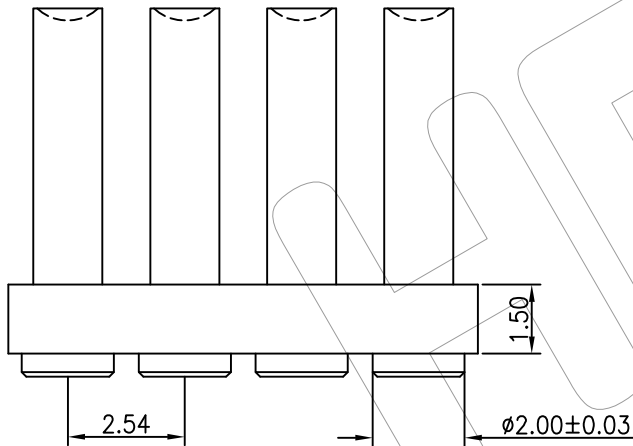
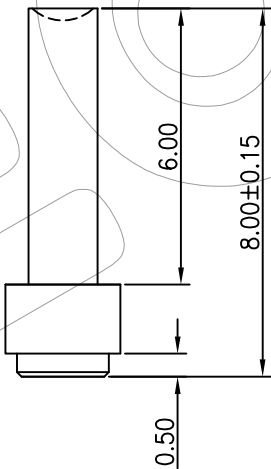


	1	2	3	4	5	6	7	8	9																																																																												
G																																																																																					
F					NOTE 1.Material Plunger: Brass 3604 Barrel: Brass 3604 Spring: SUS304 Housing:PA46 2.Plating Plunger: 3 micro-inch minimum Au over 50~100 micro-inch nickel 3.Electrical Rated current & voltage: DC 12V; 1.0A Max. Contact resistance: 50 mohm maximum at normal working height(quiessence 4..To avoid arcing issue, The adaptor start to power supply after connector mated fully.																																																																																
E																																																																																					
D																																																																																					
C					Ordering Information HC - PG F 254 15 04 N XX S X 01 No.of Pins 4Pin Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold Packing O=PE Bag A=Tray T=Tube R=Reel Special																																																																																
B																																																																																					
A	<table><tr><td></td><td></td><td></td><td></td><td colspan="2">OPERATION</td><td rowspan="2">DRAW</td><td rowspan="2">Ayang</td><td rowspan="2">SCALE</td><td rowspan="2">FIT</td><td rowspan="2"></td><td rowspan="2">东莞市禾康电子有限公司</td></tr><tr><td></td><td></td><td></td><td></td><td>X.X</td><td>±0.30</td><td></td><td></td><td>UNIT</td><td>mm</td><td rowspan="2">DONGGUAN HECON ELECTRONICS CO.,LTD</td><td rowspan="2">https://www.hecon-cable.com</td></tr><tr><td></td><td></td><td></td><td></td><td>X.XX</td><td>±0.20</td><td rowspan="2">CHECK</td><td></td><td></td><td>SIZE</td><td>A4</td><td rowspan="2">PART NO.</td><td rowspan="2">HC - PGF2541504NXXSX01</td></tr><tr><td></td><td>A0</td><td></td><td>NEW DRAWING</td><td>X.XXX</td><td>±0.10</td><td></td><td></td><td></td><td>SHEET</td><td>1/1</td><td rowspan="2">TITLE:</td><td rowspan="2">2.54mm 4Pins Female Pogo Pin L=8.0</td></tr><tr><td></td><td>REV</td><td>DATE</td><td>MODIFICATION DESCRIPTION</td><td>CHANGE</td><td>Angle</td><td>±3°</td><td rowspan="2">APPROVE</td><td></td><td></td><td>PROJ.</td><td></td><td></td></tr><tr><td></td><td>1</td><td></td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td><td>9</td><td></td><td></td></tr></table>													OPERATION		DRAW	Ayang	SCALE	FIT		东莞市禾康电子有限公司					X.X	±0.30			UNIT	mm	DONGGUAN HECON ELECTRONICS CO.,LTD	https://www.hecon-cable.com					X.XX	±0.20	CHECK			SIZE	A4	PART NO.	HC - PGF2541504NXXSX01		A0		NEW DRAWING	X.XXX	±0.10				SHEET	1/1	TITLE:	2.54mm 4Pins Female Pogo Pin L=8.0		REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE			PROJ.				1		2	3	4	5	6	7	8	9		
				OPERATION		DRAW	Ayang	SCALE	FIT		东莞市禾康电子有限公司																																																																										
				X.X	±0.30									UNIT	mm	DONGGUAN HECON ELECTRONICS CO.,LTD	https://www.hecon-cable.com																																																																				
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	HC - PGF2541504NXXSX01																																																																									
	A0		NEW DRAWING	X.XXX	±0.10					SHEET			1/1	TITLE:	2.54mm 4Pins Female Pogo Pin L=8.0																																																																						
	REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE			PROJ.																																																																											
	1		2	3	4	5		6	7	8	9																																																																										