

APPROVAL SPECIFICATIONS

Title. TACT SWITCH

Product Model. PB22M06371-04

Customer's Part NO.

Customer's Model:

Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: Date:

Approved by: Date:

APPROVE	REVIEW	PREPARE
	杨光华	王焱盛



APPROVAL SPECIFICATIONS

Product name	P/N	Version	Document No.	Page
Tact switch	PB22M06371-04	A/00		2/11

变更履历表:

[illegible]



Product name	P/N	Version	Document No.	Page
Tact switch	PB22M06371-04	A/00		3/11

1、概述

GENERAL

1.2 适用范围

APPLICATION

此规格书适用于机械式按键开关的相关要求

This specification is applied to the requirements for PUSH SWITCH (MECHANICAL CONTACT).

1.3 工作温度范围

Operating Temperature Range

-40℃~85℃(在标准大气压、标准湿度条件下)

-40℃~85℃ (Normal humidity, normal air pressure)

1.4 贮藏温度范围

Storage Temperature Range

-30℃~80℃(在标准大气压、标准湿度条件下)

-30℃~80℃ (Normal humidity, normal air pressure)

1.5 测试条件

Test Conditions

在没有其它特定的条件下，应该在以下的条件下进行测试和测量：

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温.....5℃~35℃

Normal temperature.....5℃~35℃

标准湿度.....相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压.....86KPa~106Kpa

Normal air pressure.....86Kpa~106Kpa

在制造过程中，测试和测量应该在以下的条件下进行：

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度.....20℃±2℃

Temperature.....20℃±2℃

相对湿度.....65%±5%

Relative humidity.....65%±5%

环境气压.....86KPa~106Kpa

Air pressure.....86KPa~106Kpa



Product name	P/N	Version	Document No.	Page
Tact switch	PB22M06371-04	A/00		4/11

2、 详细说明

Detailed specification

2.1 外观：应无影响、降低产品性能的缺陷；

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸：应符合装配图要求；

Style and dimension: shall conform to the assemble drawings.

2.3 接触形式：2P2T

FUNCTION : 2P2T

2.4 时间特性：NON-SHORTING

TIMING : NON-SHORTING

2.5 负载：DC 30V, 0.1A

Ratings: DC 30V, 0.1A

3. 电气性能：

ELECTRICAL SPECIFICATION

项 目 ITEM		试 验 条 件 TEST CONDITIONS	要求 REQUIREMENTS
3.1	接触电阻 Contact Resistance	在微小电流（100 mA）以下测试 Measured at small current (100 mA or less) 1000Hz	$\leq 100\text{m}\Omega$
3.2	绝缘电阻 Insulation Resistance	在端子之间施加 DC 500V /min 的条件下,测量端子之间底座、盖板的电阻值 Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute.	$\geq 100\text{M}\Omega$
3.3	耐 压 Dielectric voltage proof	输入 AC 500V (50-60HZ) 电压,1 分钟,感应电流为 0.5mA, 按以下接触方法测试: AC 500V rms (50-60Hz) For 1 MIN , trip current:0.5mA (1) 不接触的插脚之间 Between conductors not to be contact (2) 插脚与外壳之间 Between individual terminals and frame	无击穿、无飞弧 There should be no breakdown and flashover



GANGYUAN


APPROVAL SPECIFICATIONS

Product name		P/N	Version	Document No.	Page
Tact switch		PB22M06371-04	A/00		5/11
项目 ITEM		试 验 条 件 TEST CONDITIONS			要求 REQUIREMENTS
4. 机械性能： MECHANICAL SPECIFICATION					
4.1	按力 Operating Force	开关垂直于操作方向放置，在开关驱动件顶端中心逐渐施力，测量开关导通所需的最大力度。 Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the switch to come to a stop shall be measured.			200±80 gf
4.2	端子强度 Terminal Strength	在插脚前端任意一个方向加 500gf 力度测试, 时间为 60 秒 A static load of 500gf shall be applied to the Terminal for 60 Sec.in any direction.			产品无裂开、松动异常, 满足于机械, 电器性能 Electrical characteristics shall be satisfied without damage or excessive looseness of terminals



GANGYUAN

APPROVAL SPECIFICATIONS

Product name		P/N	Version	Document No.	Page
Tact switch		PB22M06371-04	A/00		6/11
项目 ITEM		试 验 条 件 TEST CONDITIONS			要求 REQUIREMENTS
4.3	停止强度 Stop Strength	开关垂直于操作方向放置，从操作方向向驱动件施加 10N 的静负荷持续 1min。 Placing the switch such that the direction of switch operation is vertical, and then a static load of 30N shall be applied in the direction of stem operation for a period of 1 min.			无机械和电气损坏 There shall be no sign of damage mechanically and electrically.
4.4	手柄拔出强度 Stem Strength	开关垂直于操作方向放置，反方向实施最大操作力，并测量手柄的行程范围。 Placing the switch such that the direction of switch operation is vertical, and then the maximum force to withstand a pull applied opposite to the direction of stem operation shall be measured.			5N min.
4.5	振动 Vibration	根据以下给定条件进行测试： Measurement shall be made following the test set forth below: (1) 振动频率范围：10~55~10Hz Vibration frequency range: 10 to 55 to 10Hz (2) 振幅（峰—峰）：1.5mm Amplitude: 1.5mm (3) 振动方向：包括手柄行程方向在内的三个相互垂直的方向 Direction of vibration: Three mutually perpendicular direction including the direction of stem travel (4) 测试时间：每次 2 小时 Duration: Each 2 hours.			Item 3 Item4.1 Item4.2 Item4.3
4.6	冲击 Shock	根据下列条件进行冲击试验 Test by following conditions (1) 安装方法：正常安装 (1) installation method: normal (2) 加速度：490m/s ² (2) Acceleration: 490m/s ² (3) 作用时间：11ms (3) Acting time: 11ms (4) 测试方向：6 个方向 (4) Test direction: 6 directions 冲击次数：每个方向 3 次，共计 18 次 Times: 3 times/direction ,total 18 times			 Item3 Item4.1 Item4.2 Item4.3



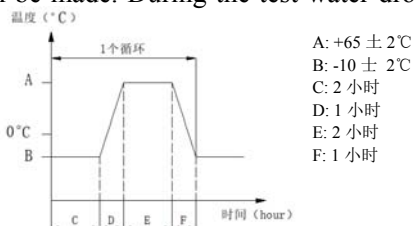
GANGYUAN

APPROVAL SPECIFICATIONS

Product name	P/N	Version	Document No.	Page
Tact switch	PB22M06371-04	A/00		7/11

5、环境耐久性：

ENVIRONMENTAL SPECIFICATION

项目 ITEM		试验条件 TEST CONDITIONS	要求 REQUIREMENTS
5.1	低温测试 Resistance to low temperature	样品应按照以下实验条件进行测试，实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试： Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made: (1) 温度：-30±2℃ Temperature：-30±2℃ (2) 时间：96h Time: 96h	Item3 Item4.1
5.2	高温测试 Heat resistance	样品应按照以下实验条件进行测试，实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试： Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made: (1) 温度：85±2℃ temperature:85±2℃ (2) 时间：96h time: 96h	Item3 Item4.1
5.3	温度变化测试 Change of temperature	根据下面的测试要求进行 5 次循环的温度周期性测试，实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试。测试期间样品应保持干燥。 After 5 cycles of following conditions, the sample shall be allowed to stand under normal temperature and humidity conditions for 1 h. and measurements shall be made. During the test water drops shall be removed. 	Item3 Item4.1
5.4	恒定湿热测试 Moisture resistance	样品应按照以下实验条件进行测试，实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试： Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made: (1) 温度：60±2℃ temperature: 60±2℃ (2) 相对湿度：90%~95% relative humidity:90% to 95% (3) 时间：96h time: 96h	接触电阻：≤200mΩ Contact resistance≤200mΩ 绝缘电阻：≥10MΩ Insulation Resistance≥10MΩ Item3.3 Item3.4 Item4.1

**GANGYUAN**

APPROVAL SPECIFICATIONS

Product name		P/N	Version	Document No.	Page
Tact switch		PB22M06371-04	A/00		8/11
项目 ITEM		试 验 条 件 TEST CONDITIONS			要求 REQUIREMENTS
5.5	硫化试验 Sulfuration resistance	样品应按照以下实验条件进行测试，实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试： Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurements are made: (1) H₂S 气体浓度: 3ppm±1ppm H₂S gas concentration: 3ppm±1ppm (2) 时间: 72h Time: 72h (3) 温度: 40±2℃ (90~95%RH) temperature: 40±2℃ (90~95%RH)			接触电阻: ≤200mΩ Contact resistance≤200mΩ Item3.3 Item3.4 Item4.1
5.6	盐雾试验 Salt Mist	在以下设定条件下进行测量: The switch shall be checked after following test: (1) 温度: 35℃±2℃ temperature: 35℃±2℃ (2) 盐溶液浓度: 5±1% (质量百分比) salt solution : 5±1%(solids by mass) (3) 时间: 8±1h Time: 8±1h 实验后的盐沉积物后水冲掉 After test, salt deposit shall be removed by running water.			金属件上没有腐蚀斑点 No remarkable corrosion shall be recognized in metal part.
5.7	工作寿命 Operation life	根据下面的测试要求进行测试: Measurement shall be made following the test set forth below: (1) DC 30V, 0.1A 带负载 DC 30V, 0.1A resistive load (2) 按动速率: 15~20 次/分 Rate of operation: 15~20 times/min (3) 按力: 按力的 1.5 倍 Operating Force: 1.5 times as much as Operating Force (4) 无故障寿命: 10000 次 fault-free life: 10000 cycles			接触电阻≤1Ω Contact resistance≤1Ω 绝缘电阻≥10MΩ Insulation Resistance≥10MΩ 按力: 初值的±30% Operating Force: initial value±30% Item3.3



GANGYUAN

APPROVAL SPECIFICATIONS

Product name		P/N	Version	Document No.	Page
Tact switch		PB22M06371-04	A/00		9/11
项目 ITEM		试 验 条 件 TEST CONDITIONS			要求 REQUIREMENTS
5.8	可焊性 Solderability	在以下设定条件下进行测量: Measurements shall be made following the test set forth below: （1）焊接温度:245±5℃ Solder temperature : 245±5℃ （2）浸入时间:3s±0.5s Immersion time: 3s±0.5s			除边缘外涂层应均匀覆盖90%以上 Except for the edge, the coating should cover a minimum 90%
6. 耐焊接热: SOLDERING CONDITIONS:					
6.1	手工焊接 Hand soldering	请按以下条件进行焊接: Please practice according to below conditions: （1）焊锡温度: ≤350℃ Soldering temperature: ≤350℃ （2）连续焊接时间: ≤3 s Continuous soldering time: ≤3 s （3）电烙铁金属头不得碰触产品本体，电烙铁不得对产品、端子施加压力 The soldering iron cannot touch , exert pressure on the product or the terminal.			

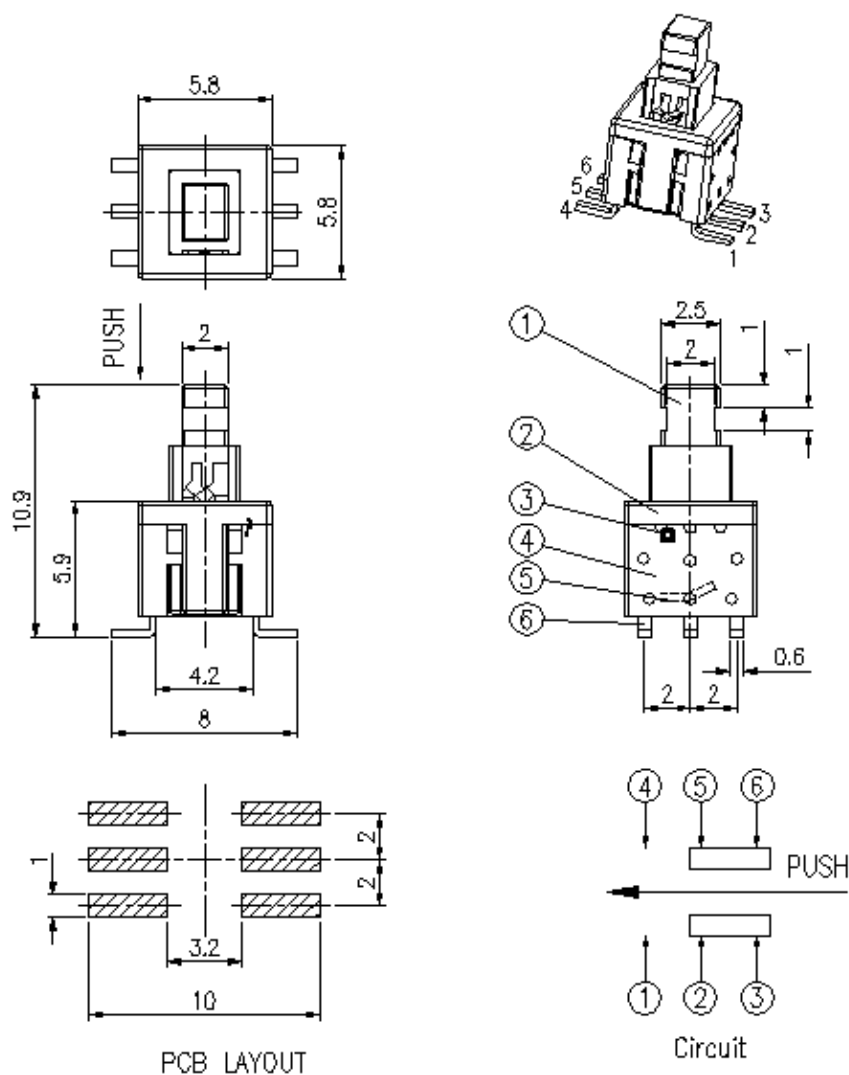


Product name		P/N	Version	Document No.	Page
Tact switch		PB22M06371-04	A/00		10/11
项目 ITEM		推 荐 条 件 Recommended conditions			
6.2	回流焊 Conditions for reflow	对于 SMT 产品, 请按以下条件进行焊接: For SMT products, Pls soldering by follow conditions: surface of product temperature 部品表面温度 (°C) 230°C 180°C 150°C 室温 260°C max. 3sec max. peak temperature time 时间 (秒) 120sec max. pre-heating(预热) 40s max. 3 ~ 4min. max. time inside soldering equipment 炉内通过时间 注意: 以上提及的条件是零部件上 PWB 表面的温度, 由于 PWB 的材料、尺寸、厚度等不同, PWB 从开关表面获得的温度也会有很大产不同, 因此, 千万小心不要让开关表面温度超过 260°C Attention:the condition above is the temperature of the PWB surface on the parts,and PWB will get different temperature because of the differences of materials,sizes,thickness and so on.Should control it below 260°C			
注意事项(Notes): a、印刷基板的焊盘尺寸参见产品图。 The pad size of the printed substrate is shown in the product diagram. b、在使用烙铁的情况下, 焊锡温度应在 350°C 以下、3 秒以内。 In the case of using soldering iron, soldering conditions shall be 350°C max and 3 sec.max. c、防止助焊剂从开关的顶端渗入 Prevent flux penetration from the top of the switch d、开关浸焊后, 注意不要用溶剂或类似品清洗开关。 After switches were soldered,please be careful not to clean switches with solvent or other similar products. e、浸焊后, 注意不要在顶部施加负荷。 Right after switches were soldered;please be careful not to load to on the knobs of switches. f、注意不要施加超负荷的压力或晃动开关。 Please be cautions not to give excessive static load or shock to switches. g、开关浸焊后, 印刷基板注意不要叠放。 Please be careful not to pile up P.W.B.after switches were soldered					

**GANGYUAN**

APPROVAL SPECIFICATIONS

Product name	P/N	Version	Document No.	Page
Tact switch	PB22M06371-04	A/00		11/11

General tolerance: $\pm 0.2\text{mm}$

NO.	NAME	MATERIAL	QTY.	FINISHING
1	KNOB	PPA	1	White
2	COVER	PPA	1	Grey
3	CONTACT	Phosphor copper	2	Ag Plated
4	CASE	PA	1	Grey
5	LOCK NEEDLE	SUS	1	Natural
6	TERMINAL	BRASS	6	Ag Plated
7	SPRING	SWC	1	Natural