

Fiber Optic Rack Mounted Patch Panels

1U



P/N: GL-DPP01-xxxxxx

2U



Back



Application

- Optic Access Network
- Local Area Network
- FTTH
- Telecommunication


Features

- 1U & 2U 19" Rack-mounted drawer type
- Material: Cold rolled steel sheet
- Supplied with cable management & splice tray
- Front panel can be changeable as per the requirements
- Suitable for LC, SC, ST, FC ect adapters
- Max. Capacity: 1U 48 core & 2U can be upto 96 core
- Dimension: 483mm(W)*230mm(D)*1U(H)
483mm(W)*230mm(D)*2U(H)
- Color: Black
- Operating Temperature: - 25° C ~80° C
- Relative Humidity: - 25° C ~80° C
- Air pressure: 70Kpa ~ 106Kpa

Accessories

- Splice Trays
- 48pcs Heat Sleeves
- Cable Gland
- Cable Tie
- Number Labels
- Installation Screws

Replaceable Front Panels

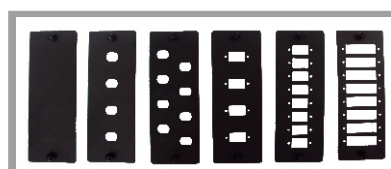

Blank Panel ST SC Simplex(LC Duplex) SC Duplex

Ordering Information

P/N Code : GL-DPP01-12FCS01 For 1U Patch panel, 12 port FC SM Simplex

P/N	Product		Loaded Adapter		Adapter Type			Dimension(mm)
GL-	DPP01	Drawer Patch Panel	3	3 Empty Hole	Unloaded			483*230*1U
			6	6 Empty Hole	Unloaded			483*230*1U
			3W	3 Adapter plates	Unloaded			483*230*1U
			6W	6 Adapter plates	S	SM	01 Simplex	483*230*1U
			12	12 Port	FC	FC/PC	M MM 02 Duplex	483*230*1U
			24	24 Port	FCA	FC/APC	53 OM3	483*230*1U
			48	48 Port	SC	SC/PC		483*230*2U
			72	72 Port	SCA	SC/APC		483*230*2U
			96	96 Port	LC	LC/PC		483*230*2U
					LCA	LC/APC		
					ST	ST/PC		