


3329H Potentiometer

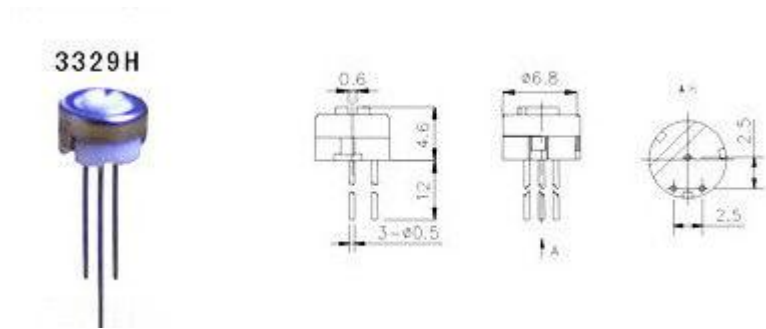

Electrical Characteristics	Range of nominal resistance	10Ω~5MΩ
	Resistance tolerance	±10%
	Terminal resistance	≤±1%R or 2Ω
	Contact resistance variation (CRV)	≤±1%R or 3Ω
	Insulation resistance	≥ 1GΩ (100V AC)
	Withstand voltage	250V (DC or AC peak value)
	Effective electrical travel	≥200°
Environment Characteristics	Rated power	0.5W (300V max)
	Temperature range	-55 ℃~+125 ℃
	TCR	±250×10-6/ ℃
	Collision (390m/S2, 4000 times)	ΔR≤±1%R
	Vibration (10-500HZ, 0.75mm, 6h)	ΔR≤±1%R, ΔUab/Uac≤±2%R, Electrical break≤100μS
	Temperature variation (-55 ℃/30min, +125 ℃/30min, 5 cycles)	ΔR≤±2%R, ΔUab/Uac≤±2%R
	Climate category (IEC68-2-2)	ΔR≤± (5%R+0.1Ω), Insulation Resistance ≥100MΩ
	Electrical endurance (0.5W, 1000h)	ΔR≤± (5%R+0.1Ω), CRV≤±3%R or 5Ω
	Mechanical endurance (200 cycles)	ΔR≤± (10%R+0.5Ω), CRV≤±3%R or 5Ω
	Steady damp heat (IEC68-2-3, Ca, 96h)	ΔR≤± (5%R+0.1Ω), Insulation Resistance≥100MΩ
Physical Characteristics	Total mechanical travel	280 °±10 °
	Starting torque	≤20mN.m
	Stopper torque	≤50mN.m
	Standard package	50 pcs /tube