

L_小型接线盒

L_Mini Junction Box

产品规格




Product Specifications

接线盒本体材料 BOX Material	PPE/PA	阻燃等级 Flame class	UL94-V0
额定电流 Rated current	20A	环境温度范围 Ambient temperature range	-40℃...+85℃(IEC)
额定电压 Rated voltage	1000V (IEC)	适配电线规格 Suitable cable cross sections	2.5/4.0mm ²
测试电压 Test voltage	6kV(50Hz,1min)	二极管数量 Diode Number	Non
连接器接触电阻 Typical contact resistance	≤ 0.25 mΩ	温度上限 Upper limiting temperature	110℃(IEC)
金属导体材料 Contact material	铜,镀锡 Copper,Tin plated	电缆外径(mm) Range of cable gland(mm)	O.D.:5.5
保护等级 Degree of protection	IP67(In potting)	汇流条尺寸 Ribbons size(mm)	6.5(W)*0.2-0.8(T)
安全等级 Safety degree	II	汇流条连接 Connection of bus ribbons	焊接 Solder

图示:



Drawing:

MLJ-01

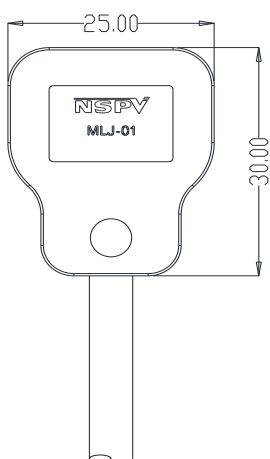


Solder Area


Silicone Area

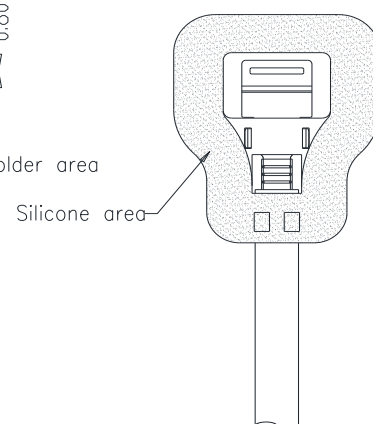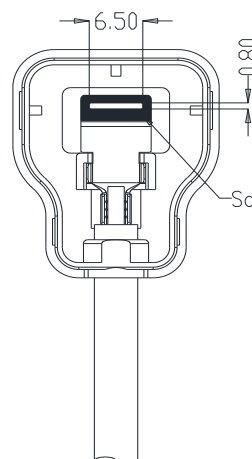

Contact mini connector:

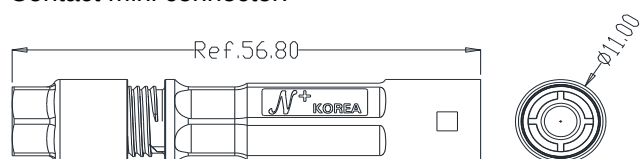

Mini male connector

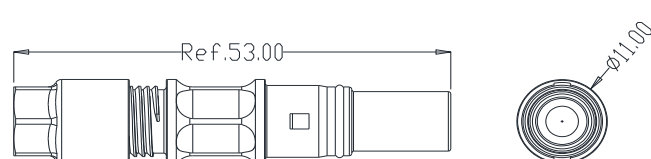

Mini female connector

L_小型接线盒 L_Mini Junction Box

使用参考图示:

Reference drawing:

