

HS-2105/2205 Series Meagapixels Speed Dome Camera

Key Feature

- * With Blacklight Chip, Full Color Night Vision;
- * All standard on Dahua P2P cloud monitoring department;
- * Support 5X/3X optical variable times, support the entire focus;
- * Strong compatibility, support the ONVIF 2.6 standards;
- * Support Dahua/Hikvision/XM CMS/Seetong UC....Platform and NVR;
- * Support RTSP real-time streaming protocol;
- * Supports H.265+ MJPEG compression, three stream, support the video output;
- * Good code flow control, high quality, low stream time delay is less than 200 ms;
- * Double system backup, since failure recovery, support A - B, cruise, etc;
- * Support 6KV lightning surge protection, hardware and strong;
- * Original PWM infrared light technology, uniform brightness, low calorific value,
The service life of infrared lamp is extended more than 3 times;
- * Applicable scenarios: reservoirs, national power systems, tunnels Farm, forest fire, fast track;


Product Photo



Model Number

HS-THS-2105	2.0MP 5X IR Night Vision
HS-THS-2205	2.0MP 5X Full Color Night Vision
HS-THF-2105	5.0MP 5X IR Night Vision
HS-THF-2205	5.0MP 5X Full Color Night Vision
HS-THD-2103	8.0MP 3X IR Night Vision
HS-THD-2203	8.0MP 3X Full Color Night Vision

Physical Dimension

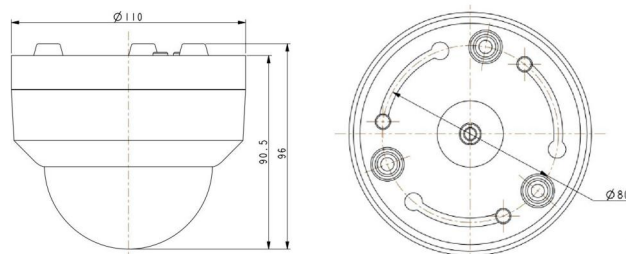

Android/IOS APP



PC CMS Software



Specification

Model Number	HS-THS-2105/2205	HS-THF-2105/2205	HS-THD-2103/2203
Chipset	SSC325 + IMX307	316DM + IMX335	SSC328Q+IMX415
Megapixels	2.0MP	5.0MP	8.0MP
Resolution	1080P/30FPS 1080P/25FPS	2594*1944/15FPS 2688*1520/25FPS 2560*1440/25FPS	3840*2160@20FPS 3072*2048@30FPS 2592*1944@30FPS 2560*1440@30FPS
Signal	IP(H.265+/H.265/H.264+/H.264)		
Power Supply	DC 12V 2A		
Operating temperature	-40℃~+60℃		
Consumption	≤25W		
Rotation Range	Medium Speed:Pan:0~355°,Tilt:10~90°		
Medium Speed	Pan:0~70°/s, Tilt:0~50°/s		
Auto Flip	NO		
WB	Indoor/Outdoor/Auto/Manual		
IR LED	2pcs Array 30Mil Array IR Led (35 Meters)		
Auto Control IR LED	Intelligent Matching Focal Length PWM Dimming Technology		
A-B Scan Point	Set Arbitrary		
A-B Scan Speed	User Programmable(Scan Speed 1-64 levels setting available)		
Preset Points	128pcs presets (dwell time 01-60s interval available)		
Guard Tours	2 groups(Max.16 points, dwell time user selectable)		
Software Control	IE, CMS, Management Platform, P2P		
Stream Code	Support Double Triple Steam Code		
Lens	5X(f=2.7mm~13.5mm)		3X(f=2.8mm~8mm)
Video Compression	M-JPEG		
Audio Compression	G711, PCM		
Two Way Audio	Built-in Microphone,Audio Output Port on Cable		
Mobile Visit	Support Android、IOS		
Communications Protocol	TCP/IP, HTTP, NTP, IGMP, DHCP, UDP, SMTP, RTP, RTSP, ARP, DDNS, DNS, PPPoE, P2P,		
Compatible	Support Dahua/Hikvision/XM CMS/Seetong UC....Platform and NVR		

Network Security	HTTPS, 802.1X、IP ADDRESS FILTERING
Network Interface	1pcs 10/100BaseT WAN, RJ45 Network Port
Alarm Port	NO
Quick Command	PELCO Instruction set
Weatherproof	IP67
OSD Menu	Support
Preset Speed Settings	Support
Power on Mode	Power on /AB scan/horizontal scan/guard position/inspection group 1/ no action
S/N Ratio	≥50dB
Ambient Light Detection	IR illumination on 1-9 grades Selectable
Other Functions	2DNR,3DNR/DWDR/BLC/AGC/WB
Lightning Protection	Transient Voltage 3000V
Package Size	145*145*132mm
Weight	Net Weight 0.55KG/Gross Weight 0.7KG

Physical Dimension

