

Customer Approved/Data:

Rev.	AMENDMENT	DATE

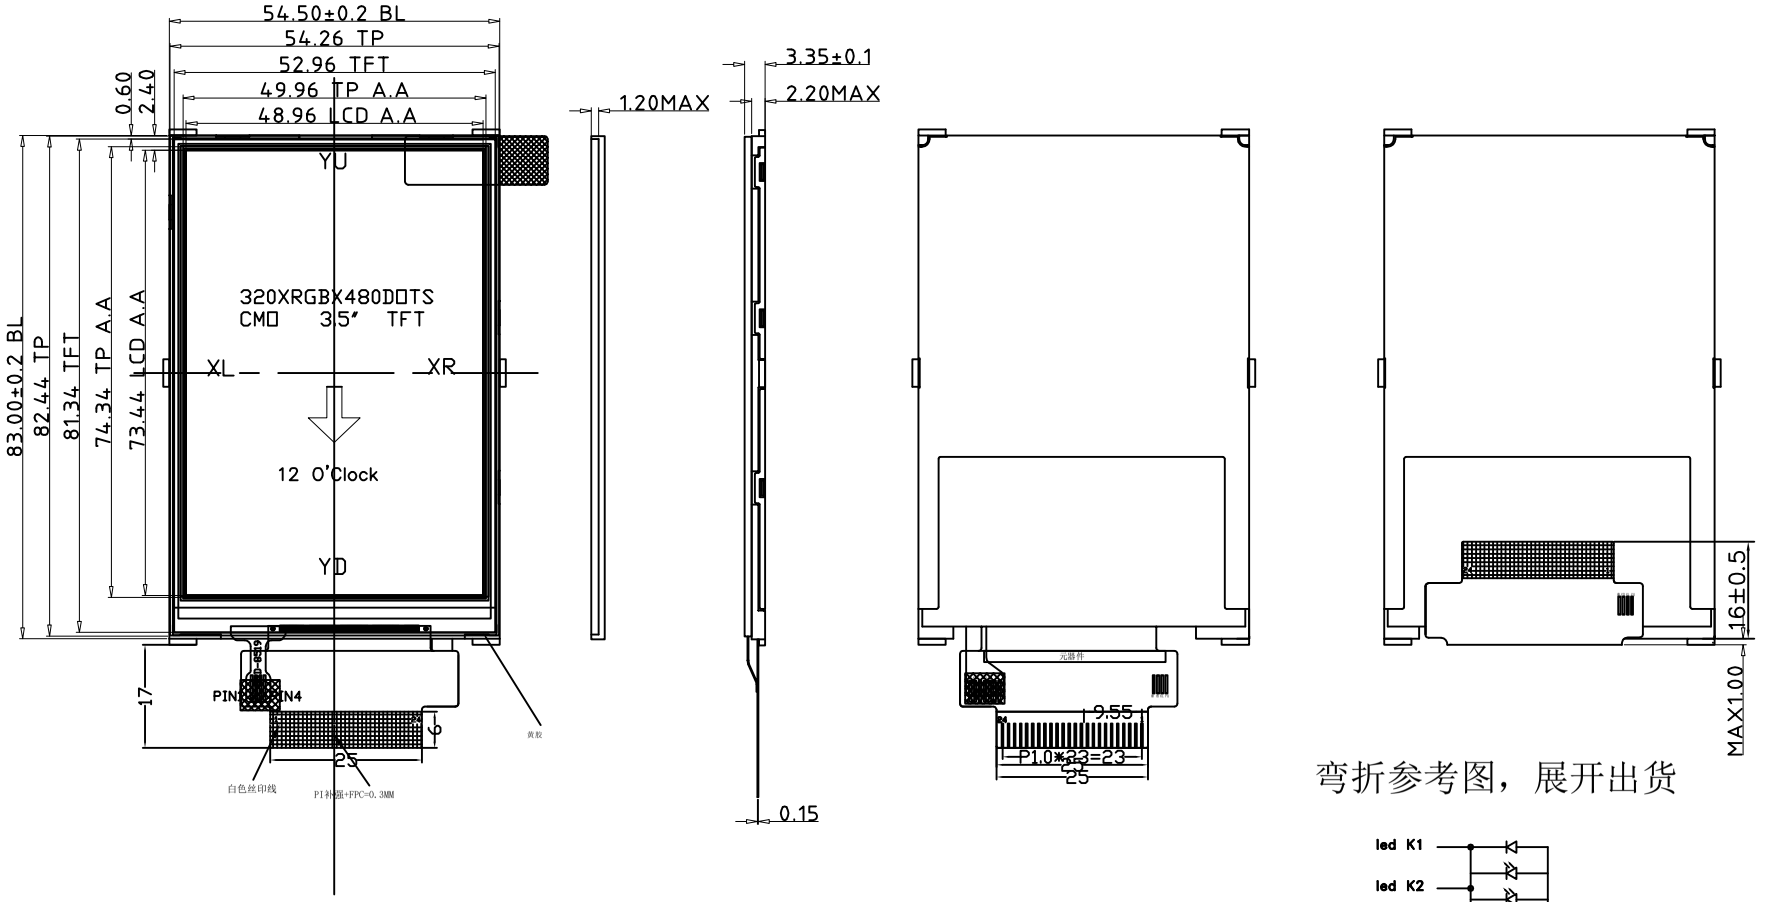

PIN	DESCRIPTION
1	LEDK
2	LEDA
3	GND
4	VCI(2.8V)
5	IOVCC(1.8/2.8V)
6	NC
7	/CS
8	RESET
9	RS
10	WR
11	RD
12	DB7
13	DB6
14	DB5
15	DB4
16	DB3
17	DB2
18	DB1
19	DB0
20	GND
21	YU
22	YD
23	XL
24	XR

弯折参考图，展开出货



6 PCS WHITE LED;IF =120mA,VF=3.2V

MAIN LCD DESCRIPTION:	
MAIN LCD DISPLAY TYPE	3.5"TFT
DISPLAY RESOLUTION	320XRGB X 480 Dots
VIEWING DIRECTION	12 O' CLOCK
CORRESPONDING IC	ST7796S
LOGIC VOLTAGE	2.8 V(TYP)
OPERATION TEMPERATURE	−20°C to +70°C
STORAGE TEMPERATURE	−30°C to +80°C

NOTE :
1. < > : SPECIAL CHARACTERISTIC
2. + : SAFETY CHARACTERISTIC
3. * : CRITICAL DIMENSION
4. (...) : REFERENCE DIMENSION

DIMENSION	TOLERANCE
> 120	± 0.5

UNIT: mm	SCALE:NO SCALE	SIZE: A4	
GENERAL TOLERANCE:	±0.2 Angle=1°		
DESIGNED:		Date	
CHECKED:		Date	
APPROVED:		Date	

ARROW-TECH ELECTRONICS CO.,LTD

FILE NO.	ATT35HV081-C1T1-A1AB-D2C 结构图	SHEET: 1/1 REV: 0
PART NAME	3.5LCM	PRJ(3)
PART NO.	ATT35HV081-C1T1-A1AB-D2C	