

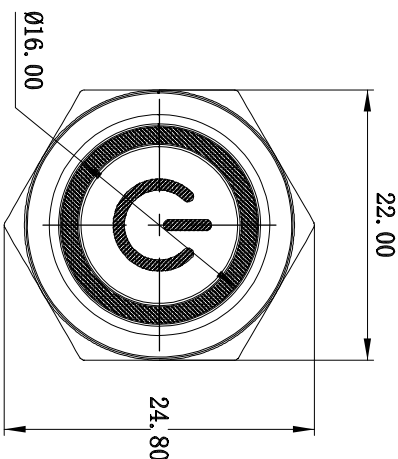
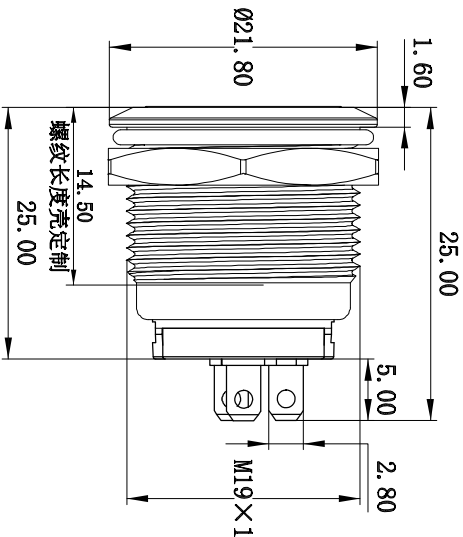


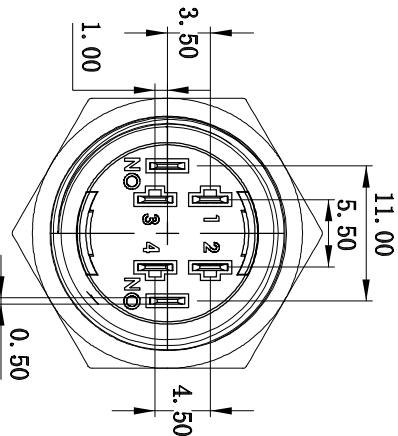


CAD FILE:




技术参数:


- 1、安装孔直径: 19~19.2mm
- 2、开关电压: 1.5V~250VAC/DC
- 3、额定电流:
阻性负载 AC-15:110V/220V 7.5A
DC-13:12V/24V 7.5A
电感性负载 AC-15:110V/220V 2A
DC-13:110V 2A
- 4、额定发热电流: i_{th}: 7.5A/250VAC
- 5、防水等级: 前端IP67
- 6、环境温度: -25℃~85℃
- 7、开关组合: 1NO (一常开)
- 8、LED电压: 3.3~220V
- 9、LED电流: 3mA~20mA
- 10、LED颜色: 红、绿、黄、蓝、白 (多色可选定制)
- 8、壳体与端子间耐压强度: ≥2500VDC/min
- 9、接线方式: 接插针/2.8
- 10、基座材质: PA66增强25%
- 11、外壳材质: SUS304
- 12、按键材质: PC/SUS316
- 13、触点材质: 银合金
- 14、电气寿命: AC-15:110V/220V 7.5A
DC-13:12V/24V 7.5A >10万次
- 15、接触阻值: ≤50mΩ
- 16、按键压力: 约2.5~3N
- 17、工作形式: 自锁/自复 (可选)




共阴极:



共阳极:



无板单色:



TOLERANCE UNLESS SPECIFIED					
WITHIN 1.5:±0.2mm OVER 1.5: ±0.3mm					
ANGLES:±2°					
TITLE:PUSH SWITCH		UNIT:mm		DRWG. NO.:	
MODEL NO: WD19D1-P1Z-BC		SCALE:4:1		DWN	
				CHK'D	
				ZHENGCZHIHUI	
				APPD.	
				LISANJUN	