



PB22



SPECIFICATIONS


Circuit	:SPST
Current rating	:0.1A / 2A
Voltage rating	:24VDC/125VAC
Dielectric withstanding voltage	:1000VAC for 1 minute
Contact resistance	:50mΩ Max
Insulation resistance	:100MΩMin
Travel	:2.5mm±0.5mm
Operating Force	:400±50gf
Mechanical Life	:Over 100,000 cycles
Electrical Life	:Over 10,000 cycles
Manual Welding	:350°C for 3 seconds
Function	:OFF-ON
Operating temperature	: -20°C ~ +70°C
Level of protection	:IP67

MATERIAL:

Base: PA66,UL rated:94V-2 Min;
Cap: ABS;
Terminal: Copper,Golden plated ;
Nut: Brass, NI Plated .


FUNCTION

PANEL MOUNTING

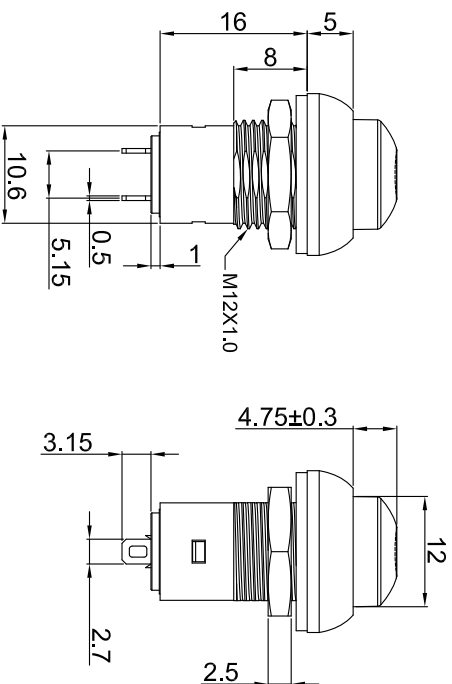

Note:

This product is strictly prohibited wave soldering and reflow soldering,please use the manual welding processing, temperature of 350°±5°and time is 3±0.5 seconds;

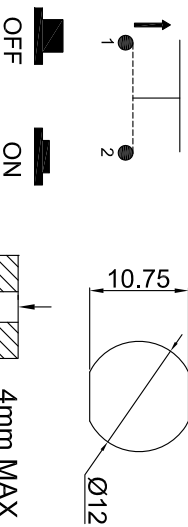

B	Black 黑色
W	White 白色
U	Blue 蓝色
G	Green 绿色
R	Red 红色
Cap Color (X)	
上盖颜色 (X)	

			公差 TOLERANCES		.X±0.3 .XX±0.15		角度 ANGLE ±1°		单位 DIMENSION UNIT		mm.	
			视 角 VIEWING ANGLE		比例尺 SCALE	NONE	日 期 DATE	2019.06.28	品 名 TITLE		图 号 DRAWING NO	
			核 准	Richard	核 对	Sinc	绘 图	姜庆勇	PB22-A-HB-N-N		PB22-A-HB-N-N_CP_A0	
A0	New Issue	2019.06.28	N/A									
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	Sinc	DRAWN BY					