

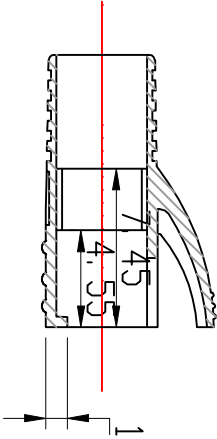
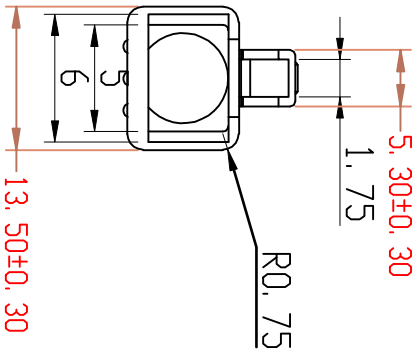
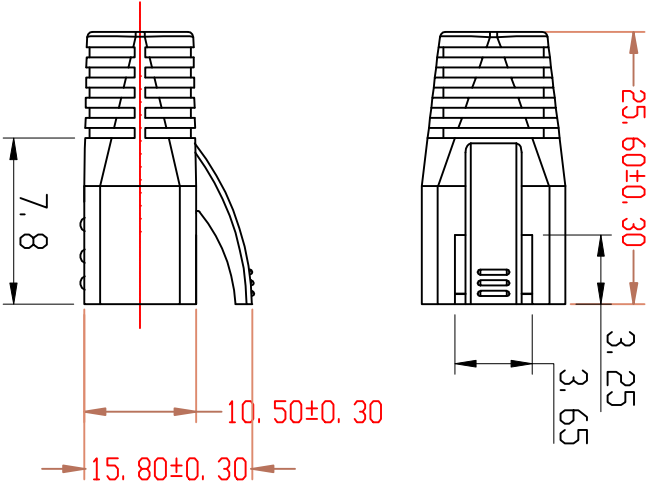


Dongguan Fangbei Electronic Co., Ltd

|             |  |                       |  |            |  |             |  |                |  |
|-------------|--|-----------------------|--|------------|--|-------------|--|----------------|--|
| DRAWN       |  | APPROVED              |  | MOLDING ON |  | CONTRACTION |  | EFFECTIVE DATE |  |
| FILE NAME   |  | MATERIAL              |  | DECIMALS   |  | CONTRACTION |  | EFFECTIVE DATE |  |
| PVC         |  | . XX=±0.1 , XXX=±0.05 |  | . XX=±0.1° |  | PVC         |  | . XX=±0.1°     |  |
| MATERIAL ON |  | UNIT                  |  | MM         |  | EDITION     |  | 1/A            |  |

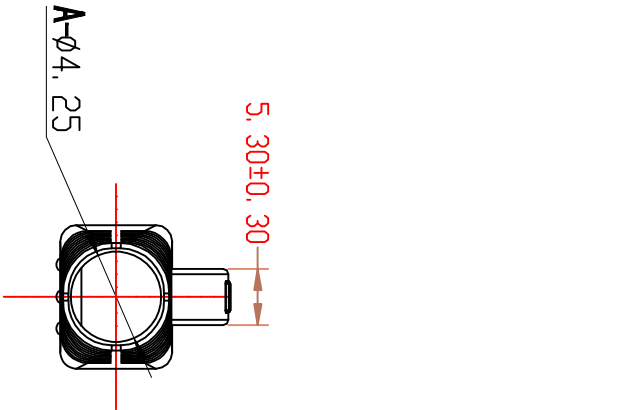

SECTION A-A

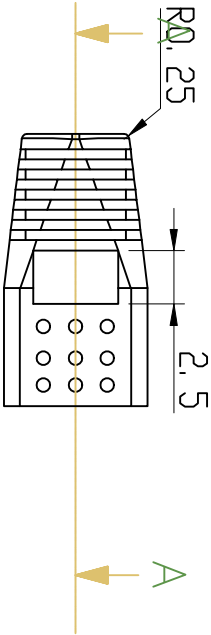

- FEATURES:
- 1 Electrical Test:
    - A. 250V AC max at 2 amps.
    - B. Dielectric with standing 500volts AC.
    - C. Insulation Resistance:500 megaohms.
    - D. Termination Resistance:35megaohms.
  - 2 Mechanical:
    - A. Cable-to-Plug tensile strength-20LBs (89N) min.
    - B. Durability:500 mating cycles.