

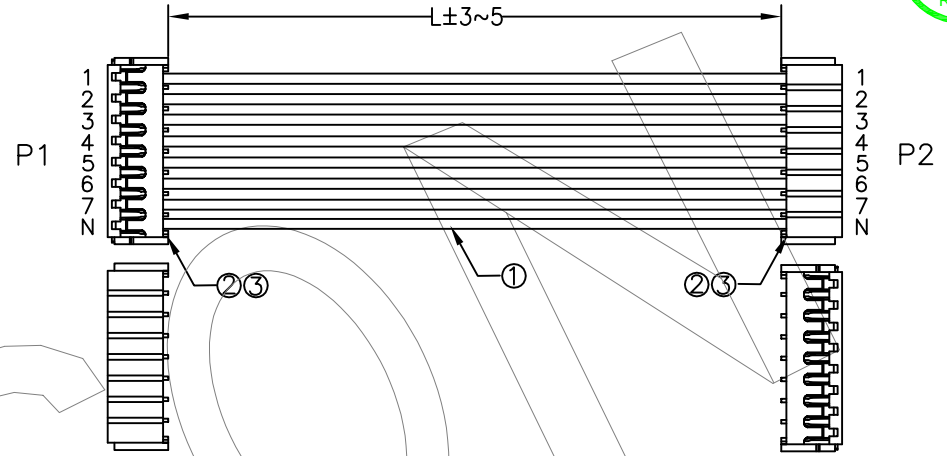

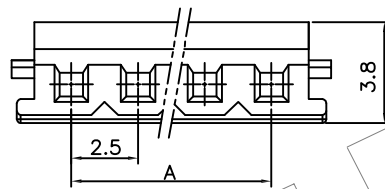




Connector you can choose Alternative as HECON Standard Or Original JST. Molex,AMP, TE

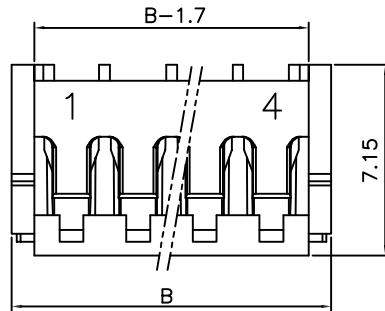

Ordering Information

HC-WH 25-S-XX-SN-XX-XX-X-XXX-02

Wire Harness	Pitch 25=2.5 Pitch	S=Standard C=Customized	No. of Pins 2P~16P	Contact Plating SN=Plating Tin	CT=Cable Tie TE=Tape WD=Woven Braid HT=Heat Shrink Tubing SW=Spiral Wrap TD=Twisted IT=Insulation Tubing SP=Special	Wire AWG 32=32AWG 30=30AWG 28=28AWG 26=26AWG 24=24AWG 22=22AWG	Wire Color B=Black BR=Brown R=Red O=Orange Y=Yellow GR=Green BL=Blue P=Purple G=Grey W=White	Length 100=100mm	Serial number
--------------	-----------------------	----------------------------	-----------------------	-----------------------------------	--	--	--	---------------------	---------------

3	EH2.5mm terminal,Plating Tin	XPCS
2	EH2.5mm XP Housing,White	2PCS
1	32AWG~22AWG XX Color	XPCS
NO.	MATERIAL&SPECIFICATION	Q'ty

REMARKS:

- 100% Open/Short test.
- DC Test:300V/10ms.
- Insulation Resistance:5.0M OHM/Min.
- Conductance Resistance:5.0 OHM/Max.

Poles	Part No.	Dimensions mm	
2	EH25-H02	EH-2P	2.50 7.0
3	EH25-H03	EH-3P	5.00 9.5
4	EH25-H04	EH-4P	7.50 12.0
5	EH25-H05	EH-5P	10.00 14.5
6	EH25-H06	EH-6P	12.50 17.0
7	EH25-H07	EH-7P	15.00 19.5
8	EH25-H08	EH-8P	17.50 22.0
9	EH25-H09	EH-9P	20.00 24.5
10	EH25-H10	EH-10P	22.50 27.0
11	EH25-H11	EH-11P	25.00 29.5
12	EH25-H12	EH-12P	27.50 32.0
13	EH25-H13	EH-13P	30.00 34.5
14	EH25-H14	EH-14P	32.50 37.0
15	EH25-H15	EH-15P	35.00 39.5
16	EH25-H16	EH-16P	37.50 42.0

OPERATION

X.X	±0.30
X.XX	±0.20
X.XXX	±0.10

DRAW

BoFeng

2020.04.20

SCALE

FIT

CHECK

Jack L

2020.04.20

UNIT

mm

APPROVE

SHEET

1/1

PROJ.

1/1

HECON

东莞市禾康电子有限公司

DONGGUAN HECON ELECTRONICS CO.,LTD

PART NO.

HC-WH25-S-XX-SN-XX-XX-X-XXX-02

TITLE:

EH2.5-XP TO EH2.5-XP

DIM

TOL

CHANGE

MODIFICATION DESCRIPTION

DATE

REV

1

2

3

4

5

6

7

8

9