



Category

[SWITCH](#)[SOCKET](#)[BREAKER](#)[FUSE HOLDER](#)[FUSE](#)[ENCODER](#)[INDICATOR](#)[POTENTIOMETER](#)[CONNECTOR](#)[WATERPROOF CONNECTOR](#)[WATERPROOF PARTS](#)[New Product](#)

Products Search



OUR PRODUCT

[Home](#) ▶ [Our Product](#) ▶ [TE5/392](#) ▶ [TE5/392](#)

FUSE / Electronic Fuse

TE5/392

Supplemental Micro Fuses, All Plastic Housing, 8.5x4x8mm in size, 0.1-6.3A in UL/CUL

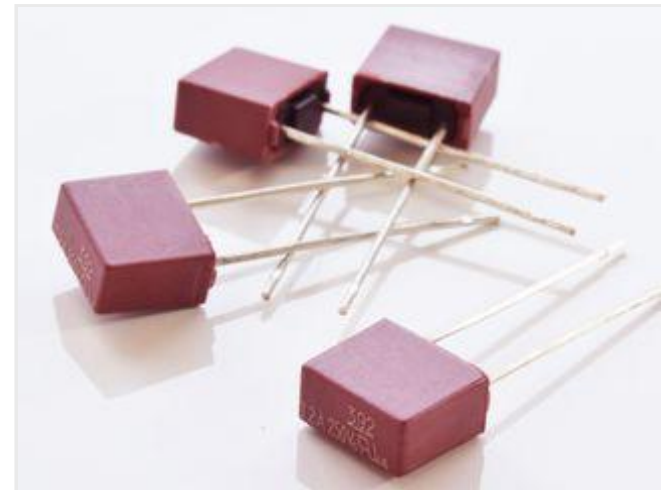
Supplemental micro Fuses

Fast or slow blow

All plastic housing in brown color

8.5x4x8mm in size, 0.1-6.3A in UL/CUL

Through hole terminals with long and short leads

[ZOOM IN](#)[PDF Download](#)[Get Information](#)[Print this page](#)

Feature



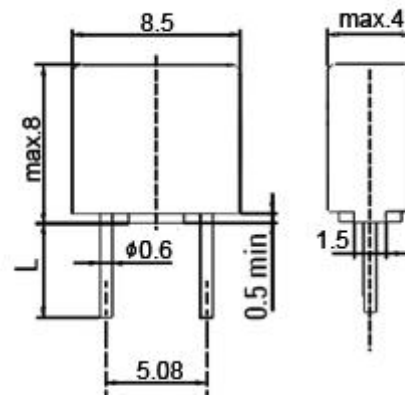
Rating

- 0.1-6.3A 125/250/400Vac(UL/CUL)


Materials

- Base/Cap: PA66, UL 94V0
- Round Pins: Copper, Tin-plated
- Packaging Option: Tape and Reel

Specification

Spec.

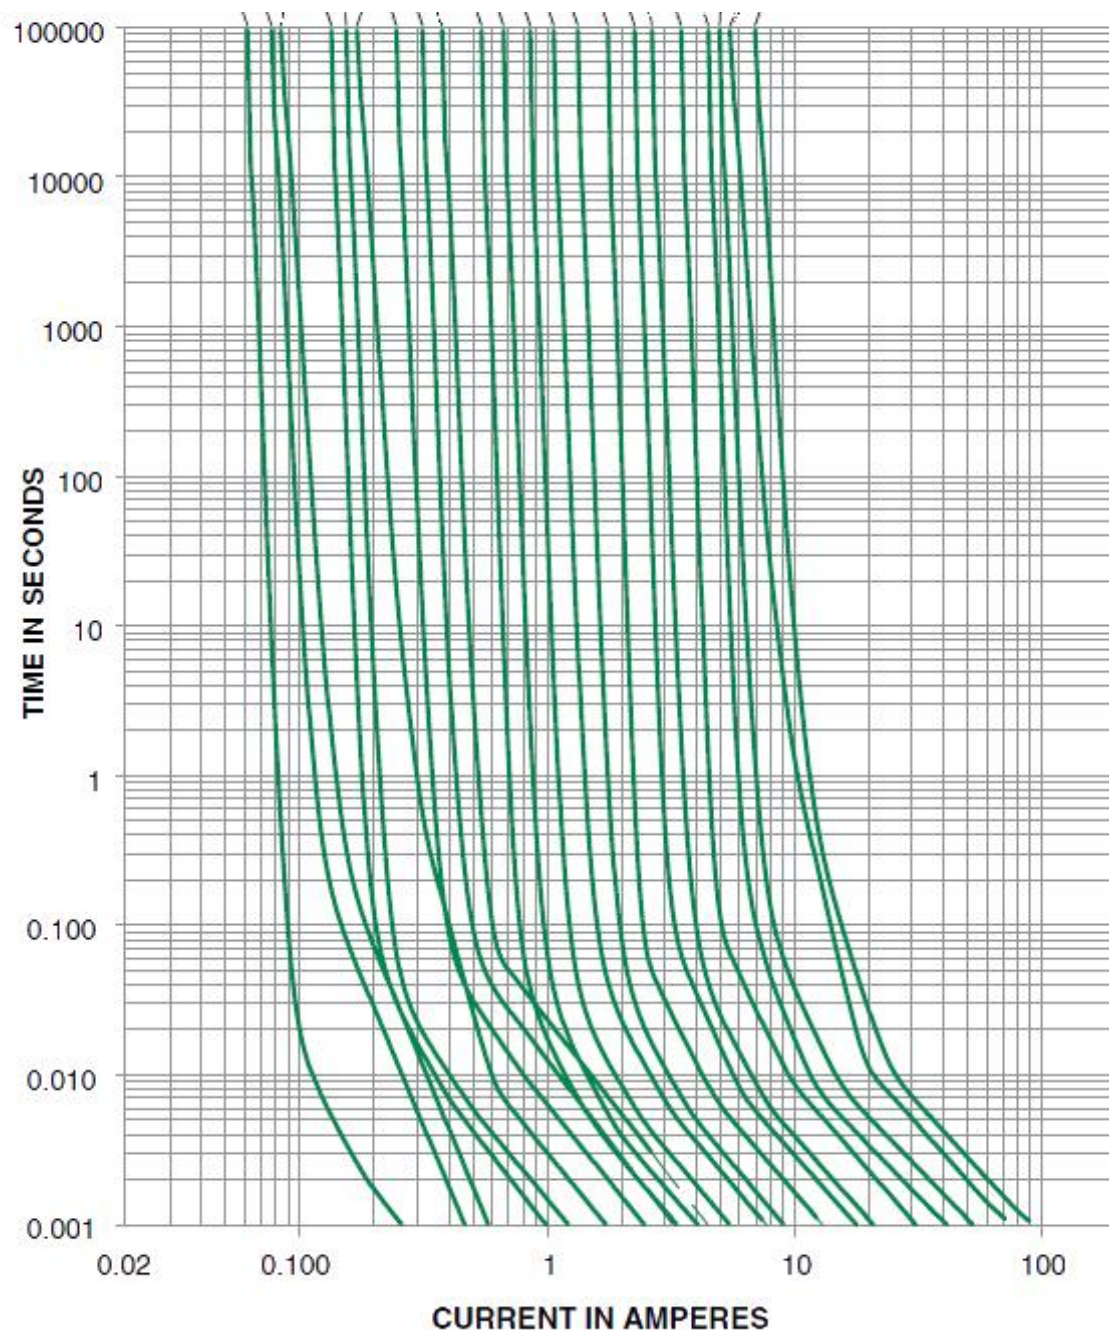
Long Leads (L=18.8mm)
Short Leads (L=4.3mm)

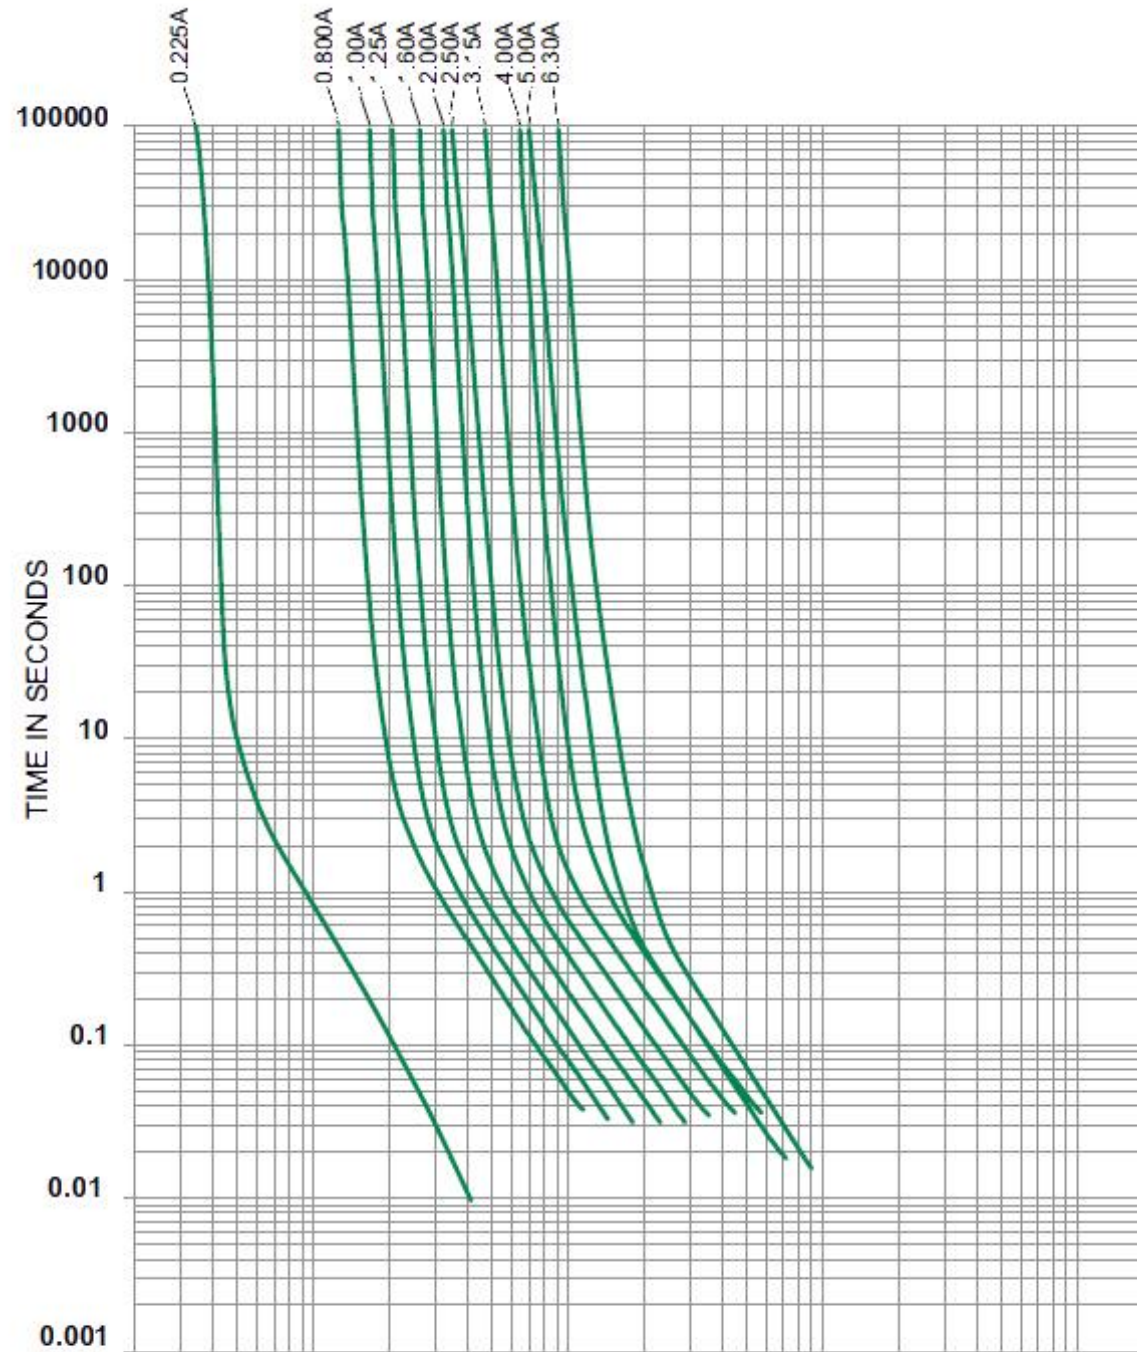
PCB Holes Layout

Item

Fast Blow, Average Time vs. Current Curves

0.050A
0.063A
0.080A
0.100A
0.125A
0.160A
0.200A
0.250A
0.315A
0.400A
0.500A
0.630A
0.800A
1.00A
1.25A
1.60A
2.00A
2.50A
3.15A
4.00A
5.00A
6.30A



Slow Blow, Average Time vs. Current Curves

0.20

1

10

100

1000

CURRENT IN AMPERES

 BACK



- 5F., No.10, Lane 218, Sec. 2, Zhongxing Rd., Xindian Dist., New Taipei City 23146, R. O. C.
Tel: +886-2-29161263 Fax: +886-2-29117574 canal@c-components.com.tw

©2009 Canal Components Inc. All Rights Reserved