



PERFECT DISPLAY

Model No.:		GM22DFA
Display	Screen Size	21.5" VA
	Backlight type	
	Aspect Ratio	
	Brightness (Typical)	
	Contrast Ratio (Typical)	
	Resolution (Max.)	
	Response Time (Typical)	
	Viewing Angle (Horizontal/Vertical)	
	Color Support	
Signal input	Video Signal	
	Sync. Signal	
	Connector	
Power	Power Consumption	Typical 15W
	Stand By Power	
	Type	DC 12V 2A
Features	Plug & Play	
	Bezeless Design	
	Cabinet Color	
	VESA Mount	100x100mm
	Low Blue Ligth	
	Flicker Free	
Accessories		
MOQ		500
Price A+ grade (9: 1)		USD 46.5

PICTURES








PERFECT DISPLAY TECH

SPECIFICATION **WORKING STATUS**

Updated time: 2022.1

GM24DFA	GM27DFA
23.8" VA	27" VA
LED	
16: 9	
250 cd/m ²	
3000:1	
1920 x 1080 @ 75Hz	
12ms (G2G)	
178°/178° (CR>10)	
16.7M, 8Bit, 72% NTSC	
Analog RGB/Digital	
Separate H/V, Composite, SOG	
HDMI + DP+ USB-C	
Typical 18W	Typical 22W
<0.5W	
DC 12V 2A	DC 12V 2A
Supported	
3 side Bezeless Design	
Matt Black	
100x100mm	100x100mm
Supported	
Supported	
Power Supply, user's manual, HDMI cable	
500	500
USD 54	USD 69

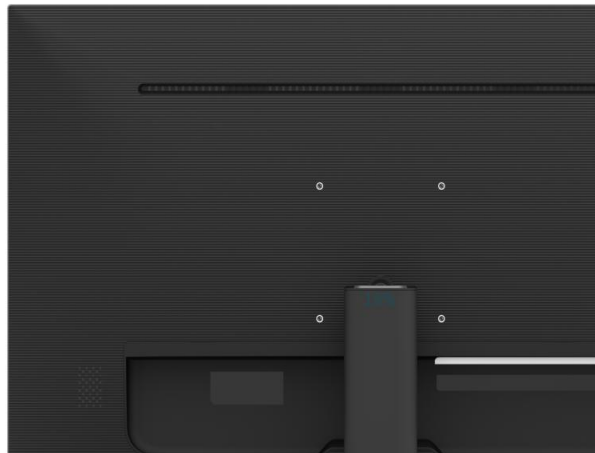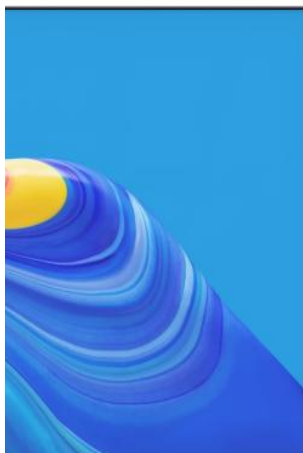

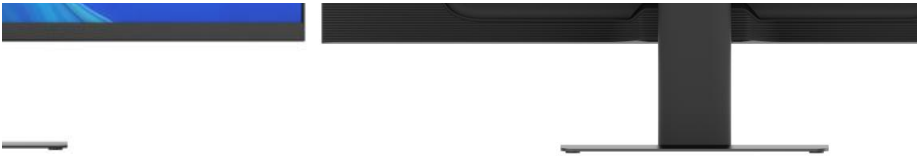

TECHNOLOGY CO., LTD
LED HDMI MONITOR

9.27, valid time: 30 days

GM27DQA
27" VA
4000:1
2560 x 1440 @ 75Hz
Typical 28W
DC 12V 3A
100x100mm
500
USD 87








PERFECT DISPLAY

Model No.:		GM22DFI
Display	Screen Size	21.5" IPS
	Backlight type	
	Aspect Ratio	
	Brightness (Typical)	
	Contrast Ratio (Typical)	
	Resolution (Max.)	
	Response Time (Typical)	
	Viewing Angle (Horizontal/Vertical)	
	Color Support	
Signal input	Video Signal	
	Sync. Signal	
	Connector	
Power	Power Consumption	Typical 15W
	Stand By Power	
	Type	DC 12V 2A
Features	Plug & Play	
	Bezeless Design	
	Cabinet Color	
	VESA Mount	100x100mm
	Low Blue Ligth	
	Flicker Free	
Accessories		
MOQ		500

PICTURES

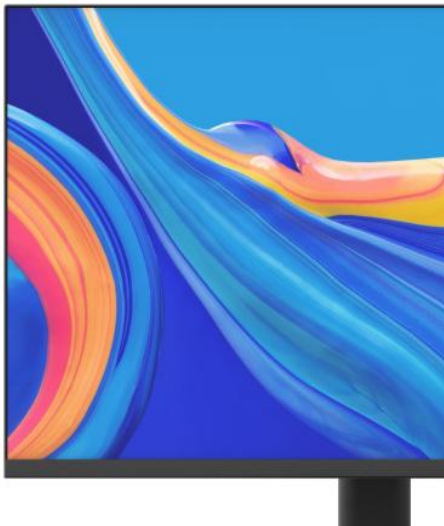



PERFECT DISPLAY TECH

SPECIFICATION **WORKING STATUS**

Updated time: 2022.1

GM24DFI	GM27DFI
23.8" IPS	27" IPS
LED	
16: 9	
250 cd/m ²	
1000:1	
1920 x 1080 @ 75Hz	
8ms(G2G)	
178°/178° (CR>10)	
16.7M, 8Bit, 72% NTSC	
Analog RGB/Digital	
Separate H/V, Composite, SOG	
HDMI + DP+ USB-C	
Typical 18W	Typical 22W
<0.5W	
DC 12V 2A	DC 12V 2A
Supported	
3 side Bezeless Design	
Matt Black	
100x100mm	100x100mm
Supported	
Supported	
Power adapter, user's manual, HDMI cable	
500	500



—



TECHNOLOGY CO., LTD
MON LED HDMI MONITOR

9.27, valid time: 30 days

GM27DQI
27" IPS
2560 x 1440 @ 75Hz
Typical 28W
DC 12V 3A
100x100mm
500



