


UL 1618 Reinforced Hook-up Wire 加强型电子线

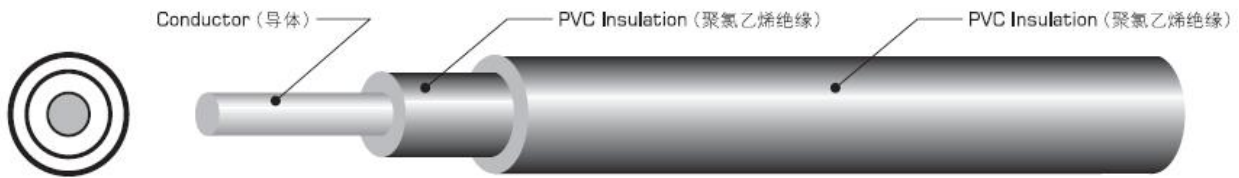

Product Description:

- ★ Rated temperature: 80°C
Rated voltage: 300V
- ★ Reference Standard: UL Subject 758, UL1581 & CSA C22.2 NO.210.2
- ★ Tinned or bare, stranded or solid copper conductor
- ★ Secondary insulation thickness from 5 to 50 mils(0.127 to 1.27mm)
- ★ Uniform insulation thickness to ensure easy stripping and cutting
- ★ Lead free PVC insulation
- ★ Passes UL VW-1 & CSA FT1 vertical flame test
- ★ Application: For internal wiring of electronic equipment

Conductor			Insulation			Maximum Resistance at 20 °C Ω /km
AWG	No./mm	Dia. mm	Primary Nom. Thick. mm	Secondary Nom. Thick. mm	Nom.Dia. mm	
30	7/0.1	0.3	0.41	0.40	1.92	354
28	7/0.127	0.38	0.41	0.40	2.00	223
26	7/0.16	0.48	0.49	0.50	2.46	139
24	11/0.16	0.61	0.46	0.50	2.53	88.9
22	17/0.16	0.76	0.48	0.48	2.68	57.5
20	26/0.16	0.94	0.41	0.42	2.60	34.6
18	41/0.16	1.18	0.41	0.38	2.76	23.3
16	26/0.254	1.49	0.41	0.40	3.12	15.1

