



RATING : 16A 125VAC 1/3HP, 16A 250VAC 1/2HP (UL, C-UL) A

16(6)A 250V $\sim$ T125/55 μ (VDE)

CIRCUIT : ON-OFF-ON (DPDT)

INSULATION RESISTANCE: DC 500V 100MΩ OR MORE

DIELECTRIC STRENGTH :Between terminals of open contacts and between terminals of opposite polarity.

AC 1500V 1 Min.






Between terminals and ground.

AC 3000V 1 Min.

CONTACT RESISTANCE : DC 2-4V 1A 20mΩ OR LESS

UL NO:E68037 CB NO:DE1-42007

C-UL NO:E68037 ENEC/VDE NO:40028875

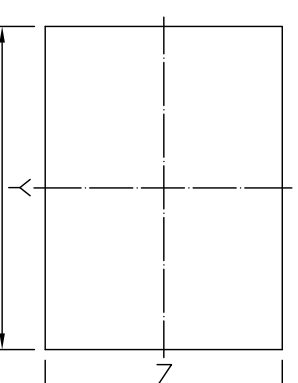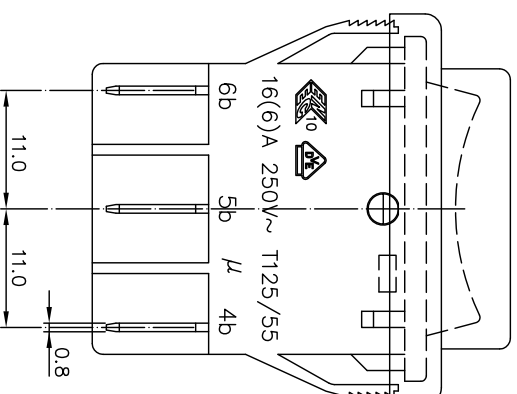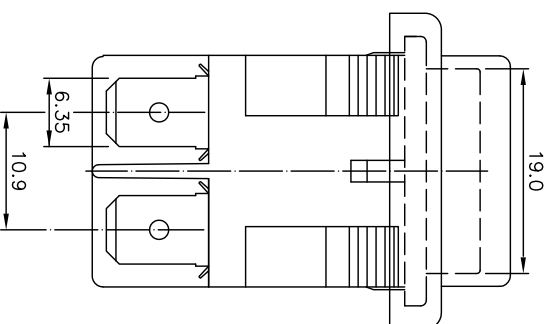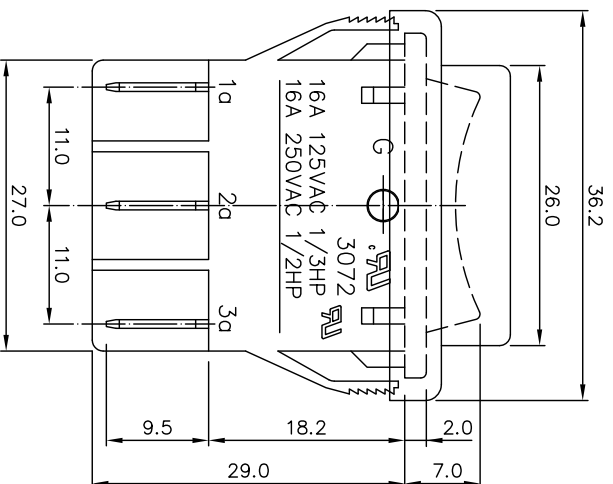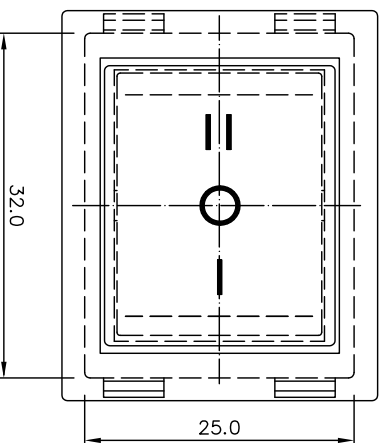

X	Y	Z
0.75~1.25	50.1 ^{+0.1}	22.1 ^{+0.1}
1.25~2.0	50.2 ^{+0.1}	22.1 ^{+0.1}
2.0~3.0	50.6 ^{+0.2}	22.1 ^{+0.1}

X=PANEL THICK
MOUNTING HOLE
(FOR REFERENCE)

No.	PART NAME	QTY	MATERIAL	REMARK
項目	零件名稱	數量	材 料	備 註
材料處理	數量	無計入尺寸公差長度±0.5mm角度度	單位比例第三共1張第一張	
描圖繪圖校對設計核准	年月日品名圖號	ROCKER SWITCH		
		3072		
		-K/P1D2TTCO5B03BKBH		